

2024-2025 PRODUCT CATALOGUE

WHEREVER YOU GO, ENJOY THE DRIVING WITH COMFORSER.



SN TIRE

SHANDONG NEW CONTINENT TIRE CO., LTD.

📍 Add: Lushan Industrial Zone, Yishui City, Shandong, China

🌐 Web: www.snctire.com

✉ Info@snctire.com

OFF-ROAD AND SUV
SPECIALIST.

MORE COURAGE,

MORE PASSION



SUV SERIES



CF1100

A/T



175/75R13	235/50R18	LT175/70R14	LT285/75R16	LT265/60R18	LT275/50R21
185/70R14	215/55R18	LT185/70R14	LT315/75R16	LT285/60R18	LT285/45R22
175/75R14	P235/55R18	LT175/80R14	LT215/85R16	LT235/65R18	LT275/50R22
175/80R14	255/55R18	185R14LT	LT235/85R16	LT265/65R18	31x10.50R15LT
205/60R15	P225/60R18	195R15C	LT215/60R17	LT275/65R18	33x12.50R15LT
205/65R15	235/60R18	LT205/60R15	LT225/60R17	LT285/65R18	35x12.50R15LT
205/70R15	245/60R18	LT205/65R15	LT225/65R17	LT255/70R18	33x12.50R17LT
215/75R15	265/60R18	LT205/70R15	LT235/65R17	LT265/70R18	35x12.50R17LT
P235/75R15	285/60R18	LT215/75R15	LT245/65R17	LT275/70R18	33x12.50R18LT
205/55R16	235/65R18	LT235/75R15	LT255/65R17	LT255/50R19	35x12.50R18LT
205/60R16	265/70R18	245/75R15C	LT265/65R17	LT235/55R19	33x12.50R20LT
215/65R16	235/50R19	LT205/55R16	LT275/65R17	LT245/55R19	35x12.50R20LT
P215/70R16	225/55R19	LT205/60R16	LT285/65R17	LT255/55R19	33x12.50R22LT
P225/70R16	245/55R19	215/65R16C	LT245/70R17	LT265/55R19	35x12.50R22LT
P235/70R16	255/55R19	225/65R16C	LT265/70R17	LT275/55R19	35x12.50R24LT
P245/70R16	265/55R19	235/65R16C	LT275/70R17	LT235/65R19	33x12.50R24LT
P255/70R16	P235/60R19	LT215/70R16	LT285/70R17	LT245/50R20	
P265/70R16	255/60R19	LT225/70R16	LT305/70R17	LT265/50R20	
P275/70R16	275/45R20	LT235/70R16	LT315/70R17	LT285/50R20	
P215/60R17	245/50R20	LT245/70R16	LT245/75R17	LT255/55R20	
225/60R17	255/50R20	LT255/70R16	LT255/75R17	LT275/55R20	
235/60R17	265/50R20	LT265/70R16	LT235/80R17	LT285/55R20	
225/65R17	275/50R20	195/75R16C	255/45R18C	LT305/55R20	
235/65R17	265/60R20	205/75R16C	LT225/55R18	LT255/60R20	
P245/65R17	P275/60R20	215/75R16C	LT225/60R18	LT275/60R20	
255/65R17	275/40R22	LT225/75R16	LT235/60R18	LT305/60R20	
P265/65R17	295/40R22	LT245/75R16	LT245/60R18	LT275/65R20	
P265/70R17	285/40R24	LT265/75R16	LT255/60R18	LT275/45R21	

156 Sizes

Page:13-16

WINTER SERIES



WINTER Pro-BLIZZARD

A/T



LT265/65R17	LT285/55R20
LT265/70R17	LT285/55R20
LT265/70R17	LT275/60R20
LT275/70R17	LT275/60R20
LT275/70R17	LT275/65R20
LT285/70R17	LT275/65R20
LT285/70R17	LT285/45R22
LT315/70R17	LT275/50R22
LT315/70R17	37 × 12.50R17LT
LT265/60R18	37 × 12.50R17LT
LT255/65R18	33 × 12.50R20LT
LT265/65R18	35 × 12.50R20LT
LT265/65R18	
LT275/65R18	
LT275/65R18	
LT285/65R18	
LT285/65R18	
LT325/65R18	
LT325/65R18	
LT265/70R18	
LT265/70R18	
LT275/70R18	
LT275/70R18	
LT265/55R19	
LT255/60R19	
LT275/45R20	
LT265/50R20	
LT255/55R20	

40 Sizes

Page:17-18

SUV SERIES



CF1000

A/T



225/70R15	265/70R16LT
P215/75R15	245/75R16LT
P235/75R15	265/75R16LT
235/55R16	265/75R16LT
235/60R16	285/75R16LT
P215/70R16	285/75R16LT
P215/70R16	235/85R16LT
P235/70R16	265/70R17LT
P235/70R16	265/70R17LT
P245/70R16	285/70R17LT
P245/70R16	285/70R17LT
255/70R16	30x9.50R15LT
P265/70R16	30x9.50R15LT
P265/70R16	31x10.50R15LT
225/60R17	31x10.50R15LT
235/65R17	35x12.50R17LT
P265/65R17	35x12.50R17LT
P265/65R17	35x12.50R18LT
255/60R18	35x12.50R18LT
285/60R18	35x12.50R20LT
265/50R20	35x12.50R20LT
265/50R20	

43 Sizes

Page:19-20

SUV SERIES



CF9000		CF3000				
R/T		M/T				
 		 				
265/60R18	LT285/55R20	245/55R19	315/75R16LT	LT275/70R16	35x12.50R18LT	35x13.50R26LT
255/55R19	LT285/55R20	245/55R19	315/75R16LT	285/75R16LT	35x12.50R18LT	35x13.50R26LT
285/50R20	35x12.50R17LT	255/55R19	315/75R16LT	LT265/65R17	35x12.50R18LT	37x13.50R26LT
LT265/65R17	35x12.50R17LT	255/55R19	315/75R16LT	LT265/65R17	35x12.50R18LT	40x15.50R26LT
LT265/70R17	37x12.50R17LT	255/55R19	LT185/85R16	265/70R17LT	37x13.50R18LT	42x15.50R28LT
LT265/70R17	37x12.50R17LT	255/55R19	LT185/85R16	LT265/60R18	37x13.50R18LT	
LT275/70R17	37x13.50R17LT	165/80R13LT	215/85R16LT	LT265/60R18	33x12.50R20LT	
LT275/70R17	37x13.50R17LT	165/80R13LT	235/85R16LT	275/65R18LT	33x12.50R20LT	
LT285/70R17	40x13.50R17LT	LT205/70R15	LT235/65R17	275/65R18LT	35x12.50R20LT	
LT285/70R17	40x13.50R17LT	215/75R15LT	LT235/65R17	LT265/50R20	35x12.50R20LT	
LT295/70R17	35x12.50R18LT	215/75R15LT	LT245/65R17	LT265/50R20	35x13.50R20LT	
LT295/70R17	35x12.50R18LT	235/75R15LT	LT245/65R17	31x10.50R15LT	35x13.50R20LT	
LT305/70R17	33x12.50R20LT	235/75R15LT	LT245/70R17	31x10.50R15LT	37x13.50R20LT	
LT305/70R17	35x12.50R20LT	LT235/70R16	LT245/70R17	32x11.50R15LT	37x13.50R20LT	
LT315/70R17	35x12.50R20LT	LT235/70R16	285/70R17LT	32x11.50R15LT	38x15.50R20LT	
LT315/70R17	38x15.50R20LT	LT245/70R16	LT285/60R18	33x12.50R15LT	40x15.50R20LT	
LT325/65R18	38x15.50R20LT	LT245/70R16	LT285/60R18	33x12.50R15LT	33x12.50R22LT	
LT325/65R18	40x15.50R20LT	305/70R16LT	LT235/65R18	35x12.50R15LT	35x12.50R22LT	
LT285/70R18	40x15.50R20LT	305/70R16LT	LT235/65R18	37x12.50R16.5LT	37x13.50R22LT	
LT285/70R18	37x13.50R22LT	225/75R16LT	LT285/65R18	37x12.50R16.5LT	33x12.50R24LT	
	37x13.50R22LT	245/75R16LT	LT285/65R18	33x12.50R17LT	35x12.50R24LT	
		265/75R16LT	LT285/65R18	33x12.50R17LT	33x13.50R24LT	
		265/75R16LT	LT285/65R18	35x12.50R17LT	35x13.50R24LT	
		265/75R16LT	LT285/50R20	35x12.50R17LT	37x13.50R24LT	
		265/75R16LT	LT285/50R20	37x12.50R17LT	33x14.50R24LT	
		285/75R16LT	LT265/70R16	40x13.50R17LT	40x15.50R24LT	
		285/75R16LT	LT265/70R16	33x12.50R18LT	33x13.50R26LT	
		285/75R16LT	LT275/70R16	33x12.50R18LT	33x13.50R26LT	
41 Sizes		117 Sizes				
Page:21-22		Page:23-26				

SUV SERIES



CF3300	EF1500
M/T	EAT SILENT FOAM
 	 
LT315/75R16	245/45R18 275/45R20
LT245/70R17	225/50R18 285/45R20
LT265/70R17	235/50R18 235/50R20
LT265/70R17	245/50R18 245/50R20
LT285/70R17	215/55R18 255/50R20
LT285/70R17	225/55R18 265/50R20
LT295/70R17	235/55R18 275/50R20
LT295/70R17	225/60R18 235/55R20
LT315/70R17	235/60R18 255/55R20
LT315/70R17	235/65R18 255/35R21
LT285/65R18	225/45R19 275/35R21
LT285/65R18	235/45R19 315/35R21
LT265/50R20	245/45R19 255/40R21
LT275/55R20	255/45R19 265/40R21
LT275/55R20	235/50R19 275/40R21
LT285/55R20	245/50R19 285/40R21
LT285/55R20	255/50R19 235/45R21
LT305/55R20	225/55R19 255/45R21
LT305/55R20	235/55R19 265/45R21
33X12.50R15LT	245/55R19 275/45R21
35X12.50R15LT	255/55R19 285/45R21
35x13.50R17LT	275/40R20 315/35R22
35x13.50R17LT	305/40R20 265/40R22
37x13.50R17LT	245/45R20 275/40R22
35x12.50R20LT	255/45R20 285/40R22
35x12.50R20LT	265/45R20 255/45R22
26 Sizes	52 Sizes
Page:27-28	Page:29-30

SUV SERIES

[illegible]

HP SERIES



CF510	CF620	CF610	SPORTS K4
HP	HP	HP	HP
 	 	 	 
175/60R13 195/60R15	155/65R13	165/65R13	165/55R14
165/65R13 195/60R15	165/65R13	165/70R13	165/60R14
185/70R13 205/60R15	165/65R13	175/70R13	155/65R14
155/80R13 205/60R15	165/70R13	165/55R14	165/65R14
185/60R14 215/60R15	175/70R13	175/65R14	185/75R14
195/60R14 225/60R15	185/70R13	165/70R14	165/45R15
205/60R14 235/60R15	155/80R13	175/70R14	165/50R15
205/60R14 185/65R15	185/60R14	165/55R15	165/55R15
235/60R14 195/65R15	195/60R14	165/60R15	175/55R15
185/65R14 205/65R15	175/65R14	175/65R15	155/60R15
195/65R14 215/65R15	185/65R14		165/60R15
185/70R14 205/70R15	165/70R14		175/60R15
195/70R14 215/70R15	175/70R14		165/65R15
205/70R14 195/55R16	185/70R14		165/40R16
215/70R14 205/55R16	165/80R14		165/45R16
195/50R15 195/60R16	195/55R15		165/50R16
205/50R15 205/60R16	185/60R15		
185/55R15 215/60R16	195/60R15		
195/55R15 225/60R16	205/60R15		
205/55R15 235/60R16	185/65R15		
185/60R15 195/60R17	195/65R15		
	205/65R15		
	205/55R16		
	205/60R16		
	215/60R16		
	215/60R16		
	205/65R16		
42 Sizes	27 Sizes	10 Sizes	16 Sizes
Page:35-36	Page:37-38	Page:39-40	Page:41-42

UHP SERIES

[illegible]

COMMERCIAL/VAN SERIES


[illegible]

WINTER SERIES



CF930	CF960
Winter(STUDLESS)	Winter(STUDLESS)
 	  
165/70R13	215/75R15 275/40R19
185/60R14	235/70R16 225/45R19
175/65R14	235/45R17 245/45R19
185/65R14	215/50R17 255/45R19
165/70R14	235/55R17 235/50R19
175/70R14	285/70R17 245/55R19
185/70R14	245/75R17 275/55R19
195/50R15	255/40R18 275/35R20
195/55R15	225/45R18 315/35R20
185/60R15	255/45R18 245/40R20
195/60R15	275/45R18 275/40R20
175/65R15	235/50R18 245/45R20
185/65R15	245/50R18 275/45R20
195/65R15	215/55R18 245/50R20
205/65R15	235/55R18 285/50R20
195/55R16	265/60R18 275/45R21
205/55R16	285/60R18 275/50R21
215/55R16	235/65R18 275/40R22
225/55R16	
205/60R16	
215/60R16	
205/50R17	
225/50R17	
215/55R17	
225/55R17	
25 Sizes	36 Sizes
Page:55-56	Page:57-58

WINTER SERIES

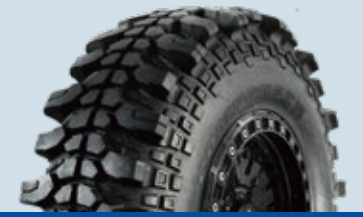

COMPETITION SERIES

[illegible]

CF1100



A/T

M+S



Features and Benefits



1. Open block distribution:

Expanded tread width and vertical groove, increase speed and traction performance on paved road.

2. Sidewall design:

Designed for protecting sidewall and beautiful decoration.

3. Tread design:

Coupled shoulder blocks and center blocks provide excellent performance on&off road condition.

4. Soft glue formula:

Effectively reduce the riding noise and enhance the grip performance.

Rim Diameter:

14-24 inch

Aspect Ratio:

80s-55s

Speed Rating:

H/R/S/T

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUAL MAX LOAD(LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
175/75R13	85T	SL	4.5-(5.0)-6.0	23.3	7.0	13.6	1135	-	50	420AB	D	D	71	10.87	891
185/70R14	88T	SL	4.5-(5.5)-6.0	24.3	7.4	13.2	1235	-	44	420AB	D	D	70	10.98	857
175/75R14	86T	SL	4.5-(5.0)-6.0	24.3	7.0	13.6	1168	-	44	420AB	D	D	71	11.38	853
175/80R14	92T	XL	4.5-(5.0)-6.0	25.0	7.0	13.2	1389	-	50	420AB	D	D	71	11.30	830
205/60R15	91H	SL	5.5-(6.0)-7.5	24.7	8.2	13.2	1356	-	44	420AB	D	D	71	11.26	842
205/65R15	94H	SL	5.5-(6.0)-7.5	25.5	8.2	13.2	1477	-	44	420AB	D	D	71	11.57	816
205/70R15	96T	SL	5.0-(6.0)-7.0	26.3	8.2	13.2	1565	-	44	420AB	D	D	71	11.93	789
215/75R15	100S	SL	5.5-(6.0)-7.0	27.7	8.5	13.2	1765	-	44	420AB	D	D	71	12.44	751
P235/75R15	105T	SL	6.0-(6.5)-8.0	28.9	9.3	13.6	2028	-	44	420AB	D	D	71	12.91	720
205/55R16	94H	XL	5.5-(6.5)-7.5	24.9	8.4	12.3	1477	-	50	420AB	D	D	72	11.46	835
205/60R16	92T	SL	5.5-(6.0)-7.5	25.7	8.2	15.1	1389	-	44	420AB	D	D	71	11.77	809
215/65R16	102H	XL	6.0-(6.5)-7.5	27.0	8.7	13.6	1874	-	50	420AB	D	D	72	12.28	769
P215/70R16	99T	SL	5.5-(6.5)-7.0	27.9	8.7	13.6	1709	-	44	420AB	D	D	71	12.64	745
P225/70R16	101T	SL	6.0-(6.5)-7.5	28.4	9.0	13.6	1819	-	44	420AB	D	D	71	12.83	731
P235/70R16	104S	SL	6.0-(7.0)-8.0	29.0	9.4	13.6	1984	-	44	420AB	D	D	71	13.07	717
P245/70R16	111T	XL	6.5-(7.0)-8.0	29.5	9.8	13.6	2403	-	50	420AB	D	D	71	13.27	704
P255/70R16	111T	SL	6.5-(7.5)-8.5	30.1	10.2	13.6	2403	-	44	420AB	D	D	72	13.50	691
P265/70R16	111T	SL	7.0-(8.0)-9.0	30.6	10.7	13.6	2403	-	44	420AB	D	D	72	13.70	678
P275/70R16	114T	SL	7.0-(8.0)-9.0	31.2	11.0	13.6	2601	-	44	420AB	D	D	72	13.94	666
P215/60R17	100T	XL	6.0-(6.5)-7.5	27.2	8.7	13.6	1764	-	50	420AB	D	D	72	12.48	765
225/60R17	103H	XL	6.0-(6.5)-8.0	27.6	9.0	13.6	1929	-	50	420AB	D	D	72	12.64	752
235/60R17	106H	XL	6.5-(7.0)-8.5	28.1	9.4	13.6	2094	-	50	420AB	D	D	72	12.83	739
225/65R17	102T	SL	6.0-(6.5)-8.0	28.5	9.0	13.2	1874	-	44	420AB	D	D	71	12.99	729
235/65R17	108H	XL	6.5-(7.0)-8.5	29.1	9.4	13.6	2205	-	50	420AB	D	D	72	13.19	715
P245/65R17	111T	XL	(7.0)-8.5	29.5	9.8	13.6	2403	-	50	420AB	D	D	72	13.39	704
255/65R17	114H	XL	7.0-(7.5)-9.0	30.1	10.2	13.6	2601	-	50	420AB	D	D	73	13.58	691
P265/65R17	112S	SL	7.5-(8.0)-9.5	30.6	10.7	13.6	2469	-	44	420AB	D	D	72	13.78	680
P265/70R17	115T	SL	7.0-(8.0)-9.0	31.7	10.7	13.6	2679	-	44	420AB	D	D	72	14.21	656
235/50R18	101H	XL	6.5-(7.5)-8.5	27.3	9.6	13.6	1819	-	50	420AB	D	D	72	12.64	761
215/55R18	99H	XL	6.0-(7.0)-7.5	27.3	8.9	13.6	1709	-	50	420AB	D	D	72	12.64	761
P235/55R18	104T	XL	6.5-(7.5)-8.5	28.1	9.6	13.6	1984	-	50	420AB	D	D	72	12.95	738
255/55R18	109H	XL	7.0-(8.0)-9.0	29.0	10.4	13.6	2271	-	50	420AB	D	D	73	13.31	716
P225/60R18	104T	XL	6.0-(6.5)-8.0	28.6	9.0	13.6	1984	-	50	420AB	D	D	72	13.15	726
235/60R18	103T	SL	6.5-(7.0)-8.5	29.1	9.4	13.6	1929	-	44	420AB	D	D	71	13.31	714
245/60R18	105T	SL	(7.0)-8.5	29.6	9.8	15.1	2039	-	44	420AB	D	D	71	13.50	703
265/60R18	114H	XL	7.5-(8.0)-9.5	30.5	10.7	13.6	2601	-	50	420AB	D	D	73	13.90	681
285/60R18	116T	SL	(8.5)-10.0	31.5	11.5	13.6	2756	-	44	420AB	D	D	74	14.25	660
235/65R18	106T	SL	6.5-(7.0)-8.5	30.0	9.4	13.6	2094	-	44	420AB	D	D	71	13.70	692
265/70R18	116T	SL	7.0-(8.0)-9.0	32.6	10.7	15.1	2756	-	44	420AB	D	D	72	14.72	636
235/50R19	103H	XL	6.5-(7.5)-8.5	28.3	9.6	13.6	1929	-	50	420AB	D	D	72	13.15	734
225/55R19	103H	XL	6.0-(7.0)-8.0	28.8	9.2	13.6	1929	-	50	420AB	D	D	72	13.31	722
245/55R19	107H	XL	7.0-(7.5)-8.5	29.6	10.0	15.1	2149	-	50	420AB	D	D	72	13.66	701
255/55R19	111H	XL	7.0-(8.0)-9.0	30.0	10.4	15.1	2403	-	50	420AB	D	D	73	13.82	692
265/55R19	113H	XL	7.5-(8.5)-9.5	30.5	10.9	13.6	2535	-	50	420AB	D	D	73	13.98	681
P235/60R19	107T	XL	6.5-(7.0)-8.5	30.1	9.4	13.6	2149	-	50	420AB	D	D	72	13.82	690
255/60R19	113T	XL	7.0-(7.5)-9.0	31.1	10.2	13.6	2535	-	50	420AB	D	D	73	14.21	669
275/45R20	110H XL	XL	8.5-(9.0)-10.5	29.8	10.7	13.6	2337	-	50	420AB	D	D	73	14.09	703
245/50R20	105H	XL	7.0-(7.5)-8.5	29.7	10.0	15.1	2039	-	50	420AB	D	D	72	13.78	700
255/50R20	109H XL	XL	7.0-(8.0)-9.0	30.1	10.4	13.6	2271	-	50	420AB	D	D	73	14.25	696
265/50R20	107T	SL	7.5-(8.5)-9.5	30.5	10.9	13.6	2149	-	44	420AB	D	D	72	14.09	682
275/50R20	113H XL	XL	7.5-(8.5)-9.5	30.9	11.2	13.6	2535	-	50	420AB	D	D	73	14.57	678
265/60R20	115T XL	XL	(8.0)-9.5	32.5	10.7	13.6	2679	-	50	420AB	D	D	73	15.28	639
P275/60R20	115T	SL	7.5-(8.0)-9.5	33.0	11.0	13.6	2679	-	44	420AB	D	D	72	15.08	630
275/40R22	107T	XL	9.0-(9.5)-11.0	30.7	10.9	13.6	2149	-	50	420AB	D	D	73	14.37	677
295/40R22	112H XL	XL	10.0-(10.5)-11.5	31.3	11.9	13.6	2469	-	50	420AB	D	D	73	14.92	668
285/40R24	112H	XL	9.5-(10.0)-11.0	33.0	11.4	13.6	2469	-	50	420AB	-	-	-	15.51	630
LT175/70R14	98/96S	E	4.5-(5.0)-6.0	23.9	7.0	13.6	1655	1565	80	-	C	E	75	10.98	874

Comforser Tires

Driving Comfort

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUAL MAX LOAD(LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
LT185/70R14	96/93S	D	5.0-(5.5)-6.0	24.3	5.5	13.6	1565	1435	65	-	-	-	-	11.22	858
LT175/80R14	95/92S	D	4.5-(5.0)-5.5	25.0	5.0	13.6	1520	1390	65	-	-	-	-	11.69	830
185R14LT	102/100R	D	5.0-(5.5)-6.0	25.7	7.4	13.2	1875	1765	65		C	E	75	11.65	815
195R15C	106/104R	D	5.0-(5.5)-6.0	27.2	7.8	13.2	2095	1985	65	-	C	E	75	12.36	770
LT205/60R15	98/95S	D	(6.0)-6.5	24.7	6.0	13.6	1655	1520	65	-	-	-	-	11.57	847
LT205/65R15	99/96S	D	5.5-(6.0)-6.5	25.5	6.0	13.6	1710	1565	65	-	-	-	-	11.89	820
LT205/70R15	96/93S	C	5.0-(6.0)-7.0	26.6	8.2	13.2	1565	1435	51	-	C	E	75	12.13	787
LT215/75R15	100/97R	C	5.5-(6.0)-7.0	27.9	8.5	13.2	1765	1610	51	-	C	E	75	12.68	749
LT235/75R15	104/101R	C	6.0-(6.5)-8.0	29.1	9.3	16.4	1985	1820	51	-	C	E	75	13.15	719
245/75R15C	109/107S	C	6.5-(7.0)-7.5	29.5	9.8	13.2	3640	3305	54	-	C	E	75	13.66	840
LT205/55R16	98/96S	C	6.0-(6.5)	24.9	6.5	13.6	1655	1565	50	-	-	-	-	11.73	841
LT205/60R16	100/98S	C	(6.0)-6.5	25.7	6.0	13.6	1765	1655	50	-	-	-	-	12.05	815
215/65R16C	109/107R	D	6.0-(6.5)-7.0	27.0	6.5	13.6	2271	2149	69	-	-	-	-	12.64	775
225/65R16C	112/110R	D	6.0-(6.5)-7.0	27.5	6.5	13.6	2469	2337	69	-	-	-	-	12.83	760
235/65R16C	121/119R	E	6.5-(7.0)-7.5	28.0	7.0	13.6	3197	2998	83	-	-	-	-	13.07	747
LT215/70R16	106/103S	D	5.5-(6.5)-7.0	27.9	6.5	13.6	2095	1930	65	-	-	-	-	12.91	746
LT225/70R16	108/105S	D	6.0-(6.5)-7.5	28.4	6.5	13.6	2205	2040	65	-	-	-	-	13.11	732
LT235/70R16	110/107S	D	6.0-(7.0)-8.0	29.2	9.4	13.6	2335	2150	65	-	C	E	75	13.27	716
LT245/70R16	113/110S	D	6.5-(7.0)-8.0	29.8	9.8	13.6	2535	2335	65	-	C	E	75	13.50	703
LT255/70R16	115/112R	D	6.5-(7.5)-8.5	30.1	7.5	13.6	2680	2470	65	-	-	-	-	13.82	692
LT265/70R16	121/118R	E	7.0-(8.0)-9.0	30.9	10.7	16.4	3195	2910	80	-	C	E	75	13.94	678
195/75R16C	110/108R	E	5.0-(5.5)-6.0	27.5	5.5	13.6	2337	2205	76	-	-	-	-	12.87	755
205/75R16C	113/111R	E	(5.5)-6.5	28.1	5.5	13.6	2535	2403	76	-	-	-	-	13.15	740
215/75R16C	116/114Q	E	5.5-(6.0)-7.0	28.7	8.5	16.4	2755	2600	77	-	C	E	75	13.07	730
LT225/75R16	115/112R	E	(6.0)-7.5	29.5	8.8	16.4	2680	2470	80	-	C	E	75	13.43	708
LT245/75R16	120/116R	E	6.5-(7.0)-8.0	30.7	9.8	16.4	3040	2780	80	-	C	E	75	13.90	681
LT265/75R16	123/120S	E	7.0-(7.5)-9.0	31.9	10.5	16.4	3415	3085	80	-	D	C	75	14.37	656
LT285/75R16	126/123R	E	7.5-(8.0)-9.5	33.1	11.3	16.4	3750	3415	80	-	D	C	75	14.84	632
LT315/75R16	127/124R	E	8.0-(8.5)-10.5	34.6	12.3	16.4	3860	3525	65	-	-	-	-	15.91	807
LT215/85R16	115/112R	E	5.5-(6.0)-7.0	30.6	8.5	16.4	2680	2470	80	-	C	E	75	13.86	683
LT235/85R16	120/116R	E	6.0-(6.5)-7.5	32.0	9.3	16.4	3040	2780	80	-	C	E	75	14.37	654
LT215/60R17	109/107S	D	6.0-(6.5)-7.5	27.2	6.5	13.6	2270	2150	65	-	-	-	-	12.76	770
LT225/60R17	104/101S	D	6.0-(6.5)-8.0	27.6	6.5	13.6	1985	1820	65	-	-	-	-	12.95	757
LT225/65R17	107/103S	D	(6.5)-8.0	28.7	9.0	13.2	2150	1930	65	-	C	E	75	13.19	728
LT235/65R17	109/105S	D	(7.0)-8.5	29.1	7.0	13.6	2270	2040	65	-	-	-	-	13.58	720
LT245/65R17	111/108S	D	(7.0)-8.5	29.5	9.8	13.6	2405	2205	65	-	C	E	75	13.50	708
LT255/65R17	114/110R	D	(7.5)-9.0	30.1	7.5	13.6	2600	2340	65	-	-	-	-	13.98	696
LT265/65R17	120/117S	E	(8.0)-9.5	30.8	10.7	13.6	3085	2835	80	-	C	E	75	14.02	679
LT275/65R17	121/118S	E	(8.0)-9.5	31.3	11.0	16.0	3195	2910	80	-	C	E	75	14.25	667
LT285/65R17	121/118S	E	(8.5)-10.0	31.6	11.5	16.4	3195	2910	80	-	C	E	75	14.33	662
LT245/70R17	119/116S	E	6.5-(7.0)-8.0	30.8	9.8	16.4	3000	2755	80	-	C	E	75	14.02	679
LT265/70R17	121/118R	E	7.0-(8.0)-9.0	31.9	10.7	16.4	3195	2910	80	-	C	E	75	14.45	656
LT275/70R17	121/118S	E	7.0-(8.0)-9.0	32.4	11.0	16.0	3195	2910	80	-	C	E	75	14.69	645
LT285/70R17	121/118S	E	7.5-(8.5)-9.5	33.0	11.5	16.4	3195	2910	80	-	C	E	75	14.88	634
LT305/70R17	125/122R	E	8.0-(9.0)-10.0	33.9	12.2	16.4	3640	3305	65	-	-	-	-	15.24	618
LT315/70R17	121/118S	E	8.0-(9.5)-10.5	34.6	12.7	16.4	3195	2910	65	-	C	E	75	15.55	604
LT245/75R17	121/118S	E	6.5-(7.0)-8.0	31.7	9.8	16.4	3195	2910	80	-	C	E	75	14.41	659
LT255/75R17	121/118S	E	6.5-(7.0)-8.5	32.3	10.0	16.4	3195	2910	80	-	C	E	75	14.61	648
LT235/80R17	120/117R	E	6.0-(6.5)-8.0	32.0	9.3	16.4	3085	2835	80	-	C	E	75	14.53	653
255/45R18C	109/107Q	D	8.0-(8.5)-9.0	27.0	8.5	13.6	2271	2149	69	-	-	-	-	12.80	774
LT225/55R18	108/105S	D	6.0-(7.0)-8.0	27.8	9.2	16.0	2205	2040	65	-	C	E	75	12.91	753
LT225/60R18	106/102S	D	(6.5)-8.0	28.6	6.5	13.6	2095	1875	65	-	-	-	-	13.46	731
LT235/60R18	108/104S	D	(7.0)-8.5	29.3	9.4	13.6	2205	1985	65	-	C	E	75	13.54	713
LT245/60R18	110/107S	D	(7.0)-8.5	29.6	9.8	15.1	2335	2150	65	-	C	E	75	13.62	707
LT255/60R18	112/108S	D	(7.5)-9.0	30.3	10.2	15.1	2470	2205	65	-	C	E	75	13.90	691
LT265/60R18	114/110S	D	(8.0)-9.5	30.7	10.7	13.6	2600	2335	65	-	C	E	75	14.09	680

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUAL MAX LOAD(LBS)	MAX INFL (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
LT285/60R18	118/115S	D	(8.5)-10.0	31.7	11.5	13.6	2910	2680	65	-	C	E	75	14.49	660
LT235/65R18	110/107S	D	6.5-(7.0)-8.5	30.0	9.4	13.6	2335	2150	65	-	C	E	75	13.82	696
LT265/65R18	122/119S	E	(8.0)-9.5	31.8	10.7	16.0	3305	3000	80	-	D	C	75	14.53	658
LT275/65R18	123/120S	E	(8.0)-9.5	32.3	11.0	16.4	3415	3085	80	-	D	C	75	14.72	647
LT285/65R18	125/122S	E	(8.5)-10.0	32.8	11.5	16.4	3640	3305	80	-	D	C	75	14.92	638
LT255/70R18	121/118Q	E	6.5-(7.5)-8.5	32.3	10.2	16.4	3195	2910	80	-	C	E	75	14.72	647
LT265/70R18	124/121S	E	7.0-(8.0)-9.0	32.9	10.7	15.1	3525	3195	80	-	D	C	75	14.96	636
LT275/70R18	125/122S	E	7.0-(8.0)-9.0	33.4	11.0	16.4	3640	3305	80	-	D	C	75	15.16	626
LT255/50R19	113/110S	E	7.0-(8.0)-9.0	29.1	10.4	16.0	2535	2335	80	-	C	E	75	13.54	719
LT235/55R19	111/108S	E	7.0-(7.5)-8.5	29.2	9.6	16.0	2405	2205	80	-	C	E	75	13.58	717
LT245/55R19	110/107S	D	7.0-(7.5)-8.5	29.6	10.0	15.1	2335	2150	65	-	C	E	75	13.78	705
LT255/55R19	111/108S	D	7.5-(8.0)-9.0	30.3	10.4	15.1	2405	2205	65	-	C	E	75	14.02	691
LT265/55R19	116/113R	E	7.5-(8.5)-9.5	30.5	8.5	13.6	2755	2535	80	-	-	-	-	14.33	686
LT275/55R19	119/116S	E	7.5-(8.5)-9.5	30.9	11.2	16.0	3000	2755	80	-	C	E	75	14.25	677
LT235/65R19	117/114S	E	6.5-(7.0)-8.5	31.1	9.4	13.6	2835	2600	80	-	C	E	75	14.33	673
LT245/50R20	108/104S	D	7.0-(7.5)-8.5	29.6	10.0	15.1	2205	1985	65	-	C	E	75	13.86	705
LT265/50R20	115/112S	E	8.0-(8.5)-9.5	30.7	10.9	13.6	2680	2470	80	-	C	E	75	14.29	681
LT285/50R20	119/116S	E	8.5-(9.0)-10.0	31.5	11.7	16.4	3000	2755	80	-	C	E	75	14.61	664
LT255/55R20	117/114S	E	7.0-(8.0)-9.0	31.0	10.4	15.1	2835	2600	80	-	C	E	75	14.41	674
LT275/55R20	120/117S	E	8.0-(8.5)-9.5	32.1	11.2	16.4	3085	2835	80	-	C	E	75	14.84	651
LT285/55R20	122/119S	E	8.5-(9.0)-10.0	32.6	11.7	16.4	3305	3000	80	-	D	C	75	15.04	641
LT305/55R20	121/118S	E	9.0-(9.5)-11.0	33.5	12.4	16.4	3195	2910	65	-	C	E	75	15.39	625
LT255/60R20	120/117S	E	(7.5)-9.0	32.0	10.2	15.1	3085	2835	80	-	C	E	75	14.80	653
LT275/60R20	119/116S	D	(8.0)-9.5	33.2	11.0	13.6	3000	2755	65	-	C	E	75	15.28	629
LT305/60R20	123/120S	E	(9.0)-11.0	34.6	12.2	16.4	3415	3085	65	-	D	C	75	15.87	604
LT275/65R20	126/123S	E	(8.0)-9.5	34.3	11.0	16.4	3750	3415	80	-	D	C	75	15.75	609
LT275/45R21	113/110S	E	8.5-(9.0)-10.5	30.7	10.7	16.0	2535	2335	80	-	C	E	75	14.41	680
LT275/50R21	118/115S	E	7.5-(8.5)-9.5	31.9	11.2	16.0	2910	2680	80	-	C	E	75	14.84	657
LT285/45R22	117/114S	E	9.0-(9.5)-10.5	32.1	11.2	16.4	2835	2600	80	-	C	E	75	15.04	652
LT275/50R22	119/116S	E	8.0-(8.5)-9.5	32.9	11.2	16.0	3000	2755	80	-	C	E	75	15.35	636
31x10.50R15LT	109S	C	7.0-(8.5)-9.0	30.7	10.6	16.4	2270	-	51	-	C	E	75	13.82	680
33X12.50R15LT	108R	C	8.0-(10.0)-10.5	32.5	12.5	16.4	2205	-	35	-	C	E	75	14.53	643
35X12.50R15LT	113R	C	8.0-(10.0)-10.5	34.5	12.5	16.4	2535	-	35	-	C	E	75	15.31	606
33x12.50R17LT	120S	E	8.5-(10.0)-11.0	32.8	12.5	16.0	3085	-	65	-	C	E	75	14.80	638
35x12.50R17LT	121S	E	8.0-(10.0)-10.5	34.8	12.5	16.4	3195	-	65	-	C	E	75	15.59	602
33x12.50R18LT	118S	E	8.5-(10.0)-11.0	32.8	12.5	16.0	2910	-	65	-	C	E	75	14.92	638
35x12.50R18LT	123S	E	8.5-(10.0)-11.0	34.8	12.5	16.0	3415	-	65	-	-	-	-	15.71	602
33x12.50R20LT	114S	E	8.5-(10.0)-11.0	32.8	12.5	16.0	2600	-	65	-	C	E	75	15.12	638
35x12.50R20LT	121S	E	8.5-(10.0)-11.0	34.8	12.5	16.4	3195	3195	65	-	C	E	75	15.91	602
33x12.50R22LT	109S	E	10.0-(10.5)-12.0	32.8	12.5	16.0	2270	-	65	-	C	E	75	15.31	638
35x12.50R22LT	117S	E	8.5-(10.0)-11.0	34.8	12.5	16.0	2835	-	65	-	C	E	75	16.10	602
35x12.50R24LT	116S	F	10.0-(10.5)-12.0	34.8	12.4	16.0	2755	-	80	-	C	E	75	16.30	602
33x12.50R24LT	106S	F	10.5-(11.5)-12.5	32.8	12.6	16.0	2095	-	80	-	C	E	75	15.51	638

WINTER Pro-BLIZZARD



A/T M+S 



Features and Benefits



- 1. The innovative bionic tread block design greatly improves driving stability and steering response in bad weather. The shoulder serrated grooves and snow-draining grooves provide strong traction and braking.
- 2. Interlocking circumferential blocks and grooves provide excellent traction and directional stability.
- 3. The thickened sidewall design provides durability and protection, makes snow removal more convenient, and can handle various road conditions in snowy and wild weather.
- 4. The 3D sipes technology allows the tire to have better traction, braking and handling in extremely cold weather such as snow and ice.

Rim Diameter:
17-22 inch

Aspect Ratio:
45s-80s

Speed Rating:
R/Q

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL (PSI)	SIDE WALL	POR	FE	WG	ERNC (dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
LT265/65R17	120/117R	E	(8.0)-9.5	30.55	10.71	17	1400	1285	80	RWL	POR	E	C	74	14.02	679
LT265/70R17	118/115Q	D	7.0-(8.0)-9.0	31.65	10.71	17	1320	1215	65	RWL	POR	E	C	74	14.45	656
LT265/70R17	123/120Q	E	7.0-(8.0)-9.0	31.65	10.71	17	1550	1400	80	RWL	POR	-	-	-	14.45	656
LT275/70R17	120/117Q	D	7.0-(8.0)-9.0	32.2	10.98	17	1400	1285	65	RWL	POR	E	C	74	14.69	645
LT275/70R17	124/121Q	E	7.0-(8.0)-9.0	32.2	10.98	17	1550	1400	80	RWL	POR	-	-	-	14.69	645
LT285/70R17	121/118Q	D	7.5-(8.5)-9.5	32.76	11.5	17	1450	1320	65	RWL	POR	E	C	74	14.88	634
LT285/70R17	126/123Q	E	7.5-(8.5)-9.5	32.76	11.5	17	1700	1550	80	RWL	POR	-	-	-	14.88	634
LT315/70R17	121/118Q	D	8.0-(9.5)-10.5	34.41	12.72	17	1450	1320	50	RWL	POR	E	C	74	15.55	604
LT315/70R17	126/123Q	E	8.0-(9.5)-10.5	34.41	12.72	17	1700	1550	65	RWL	POR	-	-	-	15.55	604
LT265/60R18	119/116R	E	(8.0)-9.5	30.51	10.71	17	1360	1250	80	RWL	POR	E	C	74	14.09	680
LT255/65R18	120/117R	E	(7.5)-8.5-9	31.06	10.24	17	1400	1285	80	RWL	POR	E	C	74	14.57	677
LT265/65R18	117/114R	D	(8.0)-9.5	31.54	10.71	17	1285	1180	65	RWL	POR	E	C	74	14.53	658
LT265/65R18	122/119R	E	(8.0)-9.5	31.54	10.71	17	1500	1360	80	RWL	POR	-	-	-	14.53	658
LT275/65R18	119/116R	D	(8.0)-9.5	32.09	10.98	17	1360	1250	65	RWL	POR	E	C	74	14.72	647
LT275/65R18	123/120R	E	(8.0)-9.5	32.09	10.98	17	1550	1400	80	RWL	POR	-	-	-	14.72	647
LT285/65R18	121/118R	D	(8.5)-10.0	32.56	11.5	17	1450	1320	65	RWL	POR	E	C	74	14.92	638
LT285/65R18	125/122R	E	(8.5)-10.0	32.56	11.5	17	1650	1500	80	RWL	POR	-	-	-	14.92	638
LT325/65R18	121/118R	D	(9.5)-10.5-11.5	34.61	13.03	17	1450	1320	50	RWL	POR	E	C	74	15.63	604
LT325/65R18	127/124R	E	(9.5)-10.5-11.5	34.61	13.03	17	1750	1600	65	RWL	POR	-	-	-	15.63	604
LT265/70R18	119/116Q	D	7.0-(8.0)-9.0	32.64	10.71	17	1360	1250	65	RWL	POR	E	C	74	14.96	636
LT265/70R18	124/121Q	E	7.0-(8.0)-9.0	32.64	10.71	17	1600	1450	80	RWL	POR	-	-	-	14.96	636
LT275/70R18	121/118Q	D	7.0-(8.0)-9.0	33.19	10.98	17	1450	1320	65	RWL	POR	E	C	74	15.16	626
LT275/70R18	125/122Q	E	7.0-(8.0)-9.0	33.19	10.98	17	1650	1500	80	RWL	POR	-	-	-	15.16	626
LT265/55R19	117/114R	E	7.5-(8.5)-9.5	30.51	10.91	16.4	1285	1180	80	RWL	POR	E	C	74	14.33	686
LT255/60R19	118/115R	E	7.0-(7.5)-9.0	31.06	10.24	16.4	1320	1215	80	RWL	POR	E	C	74	14.21	669
LT275/45R20	112/109R	E	8.5-(9.0)-10.5	29.76	10.75	14.5	1120	1030	80	RWL	POR	E	C	74	13.82	698
LT265/50R20	115/112R	E	8.0-(8.5)-9.5	30.47	10.91	16.4	1215	1120	80	RWL	POR	E	C	74	14.29	681
LT255/55R20	117/114R	E	7.0-(8.0)-9.0	31.02	10.43	16.4	1285	1180	80	RWL	POR	E	C	74	14.41	674
LT285/55R20	117/114R	D	8.5-(9.0)-10.0	32.36	11.69	16.4	1285	1180	65	RWL	POR	E	C	74	15.04	641
LT285/55R20	122/119R	E	8.5-(9.0)-10.0	32.36	11.69	16.4	1500	1360	80	RWL	POR	-	-	-	15.04	641
LT275/60R20	119/116R	D	(8.0)-9.5	32.99	10.98	16.4	1360	1250	65	RWL	POR	E	C	74	15.28	629
LT275/60R20	123/120R	E	(8.0)-9.5	32.99	10.98	16.4	1550	1400	80	RWL	POR	-	-	-	15.28	629
LT275/65R20	121/118R	D	(8.0)-9.5	34.09	10.98	17	1450	1320	65	RWL	POR	E	C	74	15.75	609
LT275/65R20	126/123R	E	(8.0)-9.5	34.09	10.98	17	1700	1550	80	RWL	POR	-	-	-	15.75	609
LT285/45R22	116/113R	E	9.0-(9.5)-10.5	32.09	11.22	14.5	1250	1150	80	RWL	POR	E	C	74	15.04	652
LT275/50R22	119/116R	E	8.0-(8.5)-9.5	32.87	11.18	16.4	1360	1250	80	RWL	POR	E	C	74	15.35	636
37×12.50R17LT	128Q	E	8-(10)-10.5	36.54	12.52	17	1800	-	65	RWL	POR	-	-	-	16.81	572
37×12.50R17LT	121Q	D	8-(10)-10.5	36.54	12.52	17	1450	-	50	RWL	POR	E	C	74	16.81	572
33×12.50R20LT	114Q	E	8.5-(10.0)-11.0	32.52	12.52	17	1180	-	65	RWL	POR	E	C	74	15.12	638
35×12.50R20LT	121Q	E	8.5-(10.0)-11.0	34.53	12.52	17	1450	-	65	RWL	POR	E	C	74	15.91	602



CF1000



A/T



Features and Benefits



1. Designed and built for all terrain use:

On road driving considered high speed stability, off road high speed stability, off road driving, and strong traction. Given tough tread block.

2. Adopted special compound:

Or strong tread and high cut resistance performance.

3. 3D block design:

Enhances the grip ability on both wet and dry road, which could available protect the tread against injury under severe road conditions.

3. All series OWL design:

Provides aesthetics of the tire.

M+S

Rim Diameter:

15-20 inch

Aspect Ratio:

85s-50s

Speed Rating:

H/R/S/T

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	SIDE WALL	POR	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
225/70R15	100T	SL	6.0-(6.5)-7.5	27.4	9.0	13.6	1764	-	44	OWL	-	420AB	D	C	71	12.36	757
P215/75R15	100S	SL	5.5-(6.0)-7.0	27.7	8.5	13.2	1742	-	44	OWL	-	420AB	D	C	71	12.44	751
P235/75R15	105S	SL	6.0-(6.5)-8.0	28.9	9.3	13.6	2028	-	44	OWL	-	420AB	D	C	71	12.91	720
235/55R16	98H	SL	6.5-(7.5)-8.5	26.1	9.6	13.6	1653	-	44	OWL	-	420AB	D	C	71	11.97	795
235/60R16	100H	SL	6.5-(7.0)-8.5	27.1	9.4	13.6	1764	-	44	OWL	-	420AB	D	C	71	12.32	767
P215/70R16	100T	SL	5.5-(6.5)-7.0	27.9	8.7	13.6	1764	-	44	OWL	-	420AB	D	C	71	12.64	745
P215/70R16	99T	SL	5.5-(6.5)-7.0	27.9	8.7	13.2	1709	-	44	OWL	-	420AB	D	C	71	12.64	745
P235/70R16	104T	SL	6.0-(7.0)-8.0	29.0	9.4	13.6	1984	-	44	OWL	-	420AB	D	C	71	13.07	717
P235/70R16	106T	SL	6.0-(7.0)-8.0	29.0	9.4	13.6	2094	-	44	OWL	-	420AB	D	C	71	13.07	717
P245/70R16	106T	SL	6.5-(7.0)-8.0	29.5	9.8	13.6	2094	-	44	OWL	-	420AB	D	C	71	13.27	704
P245/70R16	111T	SL	6.5-(7.0)-8.0	29.5	9.8	13.6	2403	-	44	OWL	-	420AB	D	C	72	13.27	704
255/70R16	111T	SL	6.5-(7.5)-8.5	30.1	10.2	13.6	2403	-	44	OWL	-	420AA	D	C	72	13.50	691
P265/70R16	111T	SL	7.0-(8.0)-9.0	30.6	10.7	13.6	2403	-	44	OWL	-	420AB	D	C	72	13.70	678
P265/70R16	112T	SL	7.0-(8.0)-9.0	30.6	10.7	13.6	2469	-	44	OWL	-	420AB	D	C	72	13.70	678
225/60R17	99H	SL	6.0-(6.5)-8.0	27.6	9.0	13.6	1709	-	44	OWL	-	420AB	D	C	71	12.64	752
235/65R17	108H	XL	6.5-(7.0)-8.5	29.1	9.4	13.2	2205	-	50	OWL	-	420AB	D	C	72	13.19	715
P265/65R17	110T	SL	7.5-(8.0)-9.5	30.6	10.7	13.6	2337	-	44	OWL	-	420AB	D	C	72	13.78	680
P265/65R17	112T	SL	7.5-(8.0)-9.5	30.6	10.7	13.6	2469	-	44	OWL	-	420AB	D	C	72	13.78	680
255/60R18	112H	XL	7.0-(7.5)-9.0	30.0	10.2	13.6	2469	-	50	OWL	-	420AA	D	C	72	13.70	692
285/60R18	116T	SL	(8.5)-10.0	31.5	11.5	13.6	2756	-	44	OWL	-	420AB	D	C	74	14.25	660
265/50R20	107T	SL	7.5-(8.5)-9.5	30.5	10.9	12.3	2149	-	44	OWL	-	420AB	D	C	72	14.09	682
265/50R20	111T	SL	7.5-(8.5)-9.5	30.5	10.9	12.3	2403	-	44	OWL	-	420AB	D	C	73	14.09	682
265/70R16LT	121/118S	E	7.0-(8.0)-9.0	30.6	10.7	16.4	3195	2910	80	OWL	-	-	-	-	-	13.86	683
245/75R16LT	120/116S	E	6.5-(7.0)-8.0	30.5	9.8	16.4	3040	2780	80	OWL	-	-	-	-	-	13.78	686
265/75R16LT	119/116Q	D	7.0-(7.5)-9.0	31.7	10.5	16.4	3000	2755	65	OWL	POR	-	-	-	-	14.25	661
265/75R16LT	123/120S	E	7.0-(7.5)-9.0	31.7	10.5	16.4	3415	3085	80	OWL	-	-	-	-	-	14.25	661
285/75R16LT	116/113Q	C	7.5-(8.0)-9.5	32.8	11.3	16.4	2755	2535	51	OWL	POR	-	-	-	-	14.72	637
285/75R16LT	126/123S	E	7.5-(8.0)-9.5	32.8	11.3	16.4	3750	3415	80	OWL	-	-	-	-	-	14.72	637
235/85R16LT	120/116S	E	6.0-(6.5)-7.5	31.7	9.3	16.4	3040	2780	80	OWL	-	-	-	-	-	14.29	659
265/70R17LT	121/118Q	E	7.0-(8.0)-9.0	31.7	10.7	16.4	3195	2910	80	OWL	POR	-	-	-	-	14.37	661
265/70R17LT	121/118S	E	7.0-(8.0)-9.0	31.7	10.7	16.4	3195	2910	80	OWL	-	-	-	-	-	14.37	661
285/70R17LT	121/118Q	E	7.5-(8.5)-9.5	32.8	11.5	16.4	3195	2910	80	OWL	POR	-	-	-	-	14.80	638
285/70R17LT	121/118S	E	7.5-(8.5)-9.5	32.8	11.5	16.4	3195	2910	80	OWL	-	-	-	-	-	14.80	638
30x9.50R15LT	104Q	C	6.0-(7.5)-8.0	29.5	9.4	16.4	1985	-	51	OWL	POR	-	-	-	-	13.31	708
30x9.50R15LT	104R	C	6.0-(7.5)-8.0	29.5	9.4	16.4	1985	-	51	OWL	-	-	-	-	-	13.31	708
31x10.50R15LT	109Q	C	7.0-(8.5)-9.0	30.5	10.6	16.4	2270	-	51	OWL	POR	-	-	-	-	13.70	685
31x10.50R15LT	109S	C	7.0-(8.5)-9.0	30.5	10.6	16.4	2270	-	51	OWL	-	-	-	-	-	13.70	685
35x12.50R17LT	121Q	E	8.0-(10.0)-10.5	34.5	12.5	16.4	3195	-	65	OWL	POR	-	-	-	-	15.51	606
35x12.50R17LT	121S	E	8.0-(10.0)-10.5	34.5	12.5	16.4	3195	-	65	OWL	-	-	-	-	-	15.51	606
35x12.50R18LT	118Q	D	8.5-(10.0)-11.0	34.5	12.5	16.4	2910	-	51	OWL	POR	-	-	-	-	15.63	606
35x12.50R18LT	123S	E	8.5-(10.0)-11.0	34.5	12.5	16.4	3415	-	65	OWL	-	-	-	-	-	15.63	606
35x12.50R20LT	121Q	E	8.5-(10.0)-11.0	34.5	12.5	16.4	3195	-	65	OWL	POR	-	-	-	-	15.83	606
35x12.50R20LT	121S	E	8.5-(10.0)-11.0	34.5	12.5	16.4	3195	-	65	OWL	-	-	-	-	-	15.83	606

Comforser Tires

Driving Comfort



R/T M+S 



Features and Benefits



1. Expanded tread width and vertical groove, increase speed and traction performance on paved road.
2. Optimized length and zigzag shoulder pattern, achieve super noiseless performance.
3. Powerful climbing ability, provides with horizontal, vertical and slope crossing groove design.
4. Sidewall uneven design, enhances extra climbing capacity.
5. Diamond shape inner sidewall, increases wear-resistance and puncture-resistance level, gives bigger bounce back ability.

Rim Diameter:

17-22 inch

The Maximum Overall Diameter Of Tire:

40 inch

Aspect Ratio:

70s-50s

Speed Rating:

Q

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	SIDE WALL	POR	UTQG	STATIC LOADED RADIUS(IN.)	REVS PER MILE
265/60R18	110Q	SL	7.5-(8.0)-9.5	30.5	10.7	14.2	2337	-	44	OBL	POR	420AB	13.90	681
255/55R19	111Q	XL	7.0-(8.0)-9.0	30.0	10.4	14.2	2403	-	50	OBL	POR	420AB	13.82	692
285/50R20	116Q	XL	8.5-(9.0)-9.5	31.3	11.7	14.2	2756	-	50	OBL	POR	420AB	14.41	665
LT265/65R17	120/117Q	E	(8.0)-9.5	30.6	10.7	17.6	3085	2835	80	RWL	POR	-	13.94	684
LT265/70R17	121/118Q	E	7.0-(8.0)-9.0	31.7	10.7	17.6	3195	2910	80	RWL	POR	-	14.37	661
LT265/70R17	123/120Q	E	7.0-(8.0)-9.0	31.7	10.7	17.6	3415	3085	80	RWL	-	-	14.37	661
LT275/70R17	121/118Q	E	7.0-(8.0)-9.0	32.2	11.0	17.6	3195	2910	80	RWL	POR	-	14.57	649
LT275/70R17	124/121Q	E	7.0-(8.0)-9.0	32.2	11.0	17.6	3525	3195	80	RWL	-	-	14.57	649
LT285/70R17	121/118Q	E	7.5-(8.5)-9.5	32.8	11.5	17.6	3195	2910	80	RWL	POR	-	14.80	638
LT285/70R17	126/123Q	E	7.5-(8.5)-9.5	32.8	11.5	17.6	3750	3415	80	RWL	-	-	14.80	638
LT295/70R17	121/118Q	E	7.5-(8.5)-10.0	33.3	11.8	17.6	3195	2910	80	RWL	POR	-	15.04	628
LT295/70R17	128/125Q	E	7.5-(8.5)-10.0	33.3	11.8	17.6	3970	3640	80	RWL	-	-	15.04	628
LT305/70R17	121/118Q	E	8.0-(9.0)-10.0	33.9	12.2	17.6	3195	2910	65	RWL	POR	-	15.24	618
LT305/70R17	125/122Q	E	8.0-(9.0)-10.0	33.9	12.2	17.6	3640	3305	65	RWL	-	-	15.24	618
LT315/70R17	121/118Q	E	8.0-(9.5)-10.5	34.4	12.7	17.6	3195	2910	65	RWL	POR	-	15.47	608
LT315/70R17	128/125Q	F	8.0-(9.5)-10.5	34.4	12.7	17.6	3970	3640	80	RWL	-	-	15.47	608
LT325/65R18	121/118Q	D	(9.5)-11.5	34.6	13.0	17.6	3195	2910	50	RWL	POR	-	15.63	604
LT325/65R18	127/124Q	E	(9.5)-11.5	34.6	13.0	17.6	3860	3525	65	RWL	-	-	15.63	604
LT285/70R18	121/118Q	D	7.5-(8.5)-9.5	33.2	11.5	17.6	3195	2910	65	RWL	POR	-	15.08	630
LT285/70R18	125/122Q	E	7.5-(8.5)-9.5	33.2	11.5	17.6	3640	3305	80	RWL	-	-	15.08	630
LT285/55R20	117/114Q	D	8.5-(9.0)-10.0	32.4	11.7	17.6	2835	2600	65	RWL	POR	-	14.96	646
LT285/55R20	122/119Q	E	8.5-(9.0)-10.0	32.4	11.7	17.6	3305	3000	80	RWL	-	-	14.96	646
35x12.50R17LT	121Q	E	8.0-(10.0)-10.5	34.5	12.5	17.6	3195	-	65	RWL	POR	-	15.51	606
35x12.50R17LT	128Q	F	8.0-(10.0)-10.5	34.5	12.5	17.6	3970	-	80	RWL	-	-	15.51	606
37x12.50R17LT	116Q	C	8.0-(10.0)-10.5	36.5	12.5	17.6	2755	-	35	RWL	POR	-	16.30	572
37x12.50R17LT	128Q	F	8.0-(10.0)-10.5	36.5	12.5	17.6	3970	-	80	RWL	-	-	16.30	572
37x13.50R17LT	117Q	C	9.0-(11.0)-11.5	36.5	13.6	18.3	2835	-	35	RBL	POR	-	16.30	572
37x13.50R17LT	128Q	E	9.0-(11.0)-11.5	36.5	13.6	18.3	3970	-	65	RBL	-	-	16.30	572
40x13.50R17LT	121Q	D	9.0-(11.0)-11.5	39.5	13.6	18.3	3195	-	50	RBL	POR	-	17.52	529
40x13.50R17LT	128Q	D	9.0-(11.0)-11.5	39.5	13.6	18.3	3970	-	50	RBL	-	-	17.52	529
35x12.50R18LT	121Q	D	8.5-(10.0)-11.0	34.5	12.5	17.6	2910	-	50	RWL	POR	-	15.63	606
35x12.50R18LT	128Q	F	8.5-(10.0)-11.0	34.5	12.5	17.6	3970	-	80	RWL	-	-	15.63	606
33x12.50R20LT	119Q	F	8.5-(10.0)-11.0	32.5	12.5	17.6	3000	-	80	RWL	POR	-	15.00	643
35x12.50R20LT	121Q	E	8.5-(10.0)-11.0	34.5	12.5	17.6	3195	-	65	RWL	POR	-	15.83	606
35x12.50R20LT	125Q	F	8.5-(10.0)-11.0	34.5	12.5	17.6	3640	-	80	RWL	-	-	15.83	606
38x15.50R20LT	121Q	D	11.0-(12.5)-14.0	37.5	15.6	18.3	3195	-	50	RWL	-	-	17.01	557
38x15.50R20LT	125Q	D	11.0-(12.5)-14.0	37.5	15.6	18.3	3970	-	50	RWL	-	-	17.01	557
40x15.50R20LT	121Q	D	11.0-(12.5)-14.0	39.5	15.6	18.3	3195	-	50	RBL	-	-	17.80	529
40x15.50R20LT	128Q	D	11.0-(12.5)-14.0	39.5	15.6	18.3	3970	-	50	RBL	-	-	17.80	529
37x13.50R22LT	118Q	D	9.5-(11.0)-12.0	36.5	13.6	18.3	2910	-	50	RWL	POR	-	16.81	572
37x13.50R22LT	128Q	F	9.5-(11.0)-12.0	36.5	13.6	18.3	3970	-	80	RWL	-	-	16.81	572

CF3000



M/T

M+S



Note: ▲ New development

Features and Benefits



- 1. Uni-directional tread design:**
with large shoulder blocks and center blocks are for maximum traction in tough road condition.
- 2. Unique shoulder blocks, protection strip and 3D sidewall:**
Enhance traction in muddy conditions and snowy conditions.
- 3. Shoulder design:**
For minimizing cut injury under severe road conditions.
- 4. Special compound adopted:**
For strong tread and high tear resistance performance.

Rim Diameter:

15-28 inch

The Maximum Overall Diameter Of Tire:

42 inch

Aspect Ratio:

85s-55s

Speed Rating:

N/P/Q/R

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUALMAX LOAD(LBS)	MAX INFL. (PSI)	SIDE WALL	POR	UTQG	STATIC LOADED RADIUS(IN.)	REVS PER MILE
245/55R19	107R	XL	7.0-(7.5)-8.5	29.6	10.0	18.9	2149	-	50	OWL	-	420AB	13.66	701
245/55R19	107R	XL	7.0-(7.5)-8.5	29.6	10.0	18.9	2149	-	50	OBL	-	420AB	13.66	701
255/55R19	111Q	XL	7.0-(8.0)-9.0	30.0	10.4	18.9	2403	-	50	OWL	POR	420AB	13.82	692
255/55R19	111Q	XL	7.0-(8.0)-9.0	30.0	10.4	18.9	2403	-	50	OBL	POR	420AB	13.82	692
255/55R19	111R	XL	7.0-(8.0)-9.0	30.0	10.4	18.9	2403	-	50	OWL	-	420AB	13.82	692
255/55R19	111R	XL	7.0-(8.0)-9.0	30.0	10.4	18.9	2403	-	50	OBL	-	420AB	13.82	692
165/80R13LT	94/93Q	D	4.0-(4.5)-5.5	23.4	6.5	14.5	1477	1435	65	RWL	POR	-	10.91	894
165/80R13LT	94/93Q	D	4.0-(4.5)-5.5	23.4	6.5	14.5	1477	1435	65	RBL	POR	-	10.91	894
LT205/70R15	96/93Q	C	5.0-(6.0)-7.0	26.3	8.2	17.6	1565	1435	51	OBL	POR	-	12.17	794
LT215/75R15	100/97Q	C	5.5-(6.0)-7.0	27.7	8.5	17.6	1765	1610	51	OWL	POR	-	12.87	756
LT215/75R15	100/97Q	C	5.5-(6.0)-7.0	27.7	8.5	17.6	1765	1610	51	OBL	POR	-	12.87	756
LT235/75R15	104/101Q	C	6.0-(6.5)-8.0	28.9	9.3	17.6	1985	1820	51	OWL	POR	-	13.39	725
LT235/75R15	104/101Q	C	6.0-(6.5)-8.0	28.9	9.3	17.6	1985	1820	51	OBL	POR	-	13.39	725
LT185/85R16	98/95Q	C	4.5-(5.0)-6.0	28.3	7.2	13.9	1655	1520	51	OWL	POR	-	13.23	738
LT185/85R16	98/95Q	C	4.5-(5.0)-6.0	28.3	7.2	13.9	1655	1520	51	OBL	POR	-	13.23	738
LT215/85R16	115/112Q	E	5.5-(6.0)-7.0	30.4	8.5	17.6	2680	2470	80	OBL	POR	-	14.13	688
LT225/75R16	115/112Q	E	(6.0)-7.5	29.3	8.8	17.6	2680	2470	80	OBL	POR	-	13.66	714
LT235/70R16	110/107Q	D	6.0-(7.0)-8.0	29.0	9.4	17.6	2335	2150	65	OWL	POR	-	13.35	722
LT235/70R16	110/107Q	D	6.0-(7.0)-8.0	29.0	9.4	17.6	2335	2150	65	OBL	POR	-	13.35	722
LT235/85R16	120/116Q	E	6.0-(6.5)-7.5	31.7	9.3	18.9	3040	2780	80	OBL	POR	-	14.69	659
LT245/70R16	118/115Q	E	6.5-(7.0)-8.0	29.5	9.8	18.9	2910	2680	80	OWL	POR	-	13.58	708
LT245/70R16	118/115Q	E	6.5-(7.0)-8.0	29.5	9.8	18.9	2910	2680	80	OBL	POR	-	13.58	708
LT245/75R16	120/116Q	E	6.5-(7.0)-8.0	30.5	9.8	18.9	3040	2780	80	OBL	POR	-	14.13	686
LT265/70R16	121/118Q	E	7.0-(8.0)-9.0	30.6	10.7	18.9	3195	2910	80	RWL	POR	-	13.86	683
LT265/70R16	121/118Q	E	7.0-(8.0)-9.0	30.6	10.7	18.9	3195	2910	80	RBL	POR	-	13.86	683
LT265/75R16	119/116Q	D	7.0-(7.5)-9.0	31.7	10.5	18.9	3000	2755	65	OWL	POR	-	14.65	661
LT265/75R16	119/116Q	D	7.0-(7.5)-9.0	31.7	10.5	18.9	3000	2755	65	OBL	POR	-	14.65	661
LT265/75R16	123/120Q	E	7.0-(7.5)-9.0	31.7	10.5	18.9	3415	3085	80	OWL	-	-	14.65	661
LT265/75R16	123/120Q	E	7.0-(7.5)-9.0	31.7	10.5	18.9	3415	3085	80	OBL	-	-	14.65	661
LT275/70R16	119/116Q	D	7.0-(8.0)-9.0	31.2	11.0	18.9	3000	2755	65	RWL	POR	-	14.06	671
LT275/70R16	119/116Q	D	7.0-(8.0)-9.0	31.2	11.0	18.9	3000	2755	65	RBL	POR	-	14.06	671
LT285/75R16	116/113Q	C	7.5-(8.0)-9.5	32.8	11.3	18.9	2755	2535	51	OWL	POR	-	14.72	637
LT285/75R16	116/113Q	C	7.5-(8.0)-9.5	32.8	11.3	18.9	2755	2535	51	OBL	POR	-	14.72	637
LT285/75R16	126/123Q	E	7.5-(8.0)-9.5	32.8	11.3	18.9	3750	3415	80	OBL	-	-	14.72	637
LT285/75R16	126/123Q	E	7.5-(8.0)-9.5	32.8	11.3	18.9	3750	3415	80	OWL	-	-	14.72	637
LT305/70R16	118/115Q	D	8.0-(9.0)-10.0	32.8	12.2	18.9	2910	2680	51	OWL	POR	-	14.72	637
LT305/70R16	118/115Q	D	8.0-(9.0)-10.0	32.8	12.2	18.9	2910	2680	51	OBL	POR	-	14.72	637
LT315/75R16	121/118Q	D	8.0-(8.5)-10.5	34.6	12.3	18.9	3195	2910	51	OWL	POR	-	15.43	605
LT315/75R16	121/118Q	D	8.0-(8.5)-10.5	34.6	12.3	18.9	3195	2910	51	OBL	POR	-	15.43	605
LT315/75R16	127/124Q	E	8.0-(8.5)-10.5	34.6	12.3	18.9	3860	3525	65	OWL	-	-	15.43	605
LT315/75R16	127/124Q	E	8.0-(8.5)-10.5	34.6	12.3	18.9	3860	3525	65	OBL	-	-	15.43	605
LT235/65R17	109/105Q	D	(7.0)-8.5	29.1	9.4	18.9	2270	2040	65	OWL	POR	-	13.58	720
LT235/65R17	109/105Q	D	(7.0)-8.5	29.1	9.4	18.9	2270	2040	65	OBL	POR	-	13.58	720
LT245/65R17	117/114Q	E	(7.0)-8.5	29.8	9.8	18.9	2835	2600	80	OWL	POR	-	13.86	703
LT245/65R17	117/114Q	E	(7.0)-8.5	29.8	9.8	18.9	2835	2600	80	OBL	POR	-	13.86	703
LT245/70R17	119/116Q	E	6.5-(7.0)-8.0	30.6	9.8	18.9	3000	2755	80	OWL	POR	-	14.09	684
LT245/70R17	119/116Q	E	6.5-(7.0)-8.0	30.6	9.8	18.9	3000	2755	80	OBL	POR	-	14.09	684
LT265/65R17	120/117Q	E	(8.0)-9.5	30.6	10.7	18.9	3085	2835	80	OWL	POR	-	13.94	684
LT265/65R17	120/117Q	E	(8.0)-9.5	30.6	10.7	18.9	3085	2835	80	OBL	POR	-	13.94	684

Comforser Tires

Driving Comfort

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUALMAX LOAD(LBS)	MAX INFL (PSI)	SIDE WALL	POR	UTQG	STATIC LOADED RADIUS(IN.)	REVS PER MILE
LT265/70R17	121/118Q	E	7.0-(8.0)-9.0	31.9	10.7	18.9	3195	2910	80	OBL	POR	-	14.45	656
LT285/70R17	121/118Q	D	7.5-(8.5)-9.5	32.8	11.5	18.9	3195	2910	65	OBL	POR	-	14.80	638
LT235/65R18	110/107Q	D	6.5-(7.0)-8.5	30.0	9.4	18.9	2335	2150	65	OWL	POR	-	14.06	696
LT235/65R18	110/107Q	D	6.5-(7.0)-8.5	30.0	9.4	18.9	2335	2150	65	OBL	POR	-	14.06	696
LT265/60R18	119/116Q	E	(8.0)-9.5	30.5	10.7	18.9	3000	2755	80	RWL	POR	-	14.02	685
LT265/60R18	119/116Q	E	(8.0)-9.5	30.5	10.7	18.9	3000	2755	80	RBL	POR	-	14.02	685
LT275/65R18	113/110Q	C	(8.0)-9.5	32.1	11.0	18.9	2535	2335	51	OBL	POR	-	14.65	652
LT275/65R18	123/120Q	E	(8.0)-9.5	32.1	11.0	18.9	3415	3085	80	OBL	-	-	14.65	652
LT285/60R18	122/119Q	E	(8.5)-10.0	31.5	11.5	18.9	3305	3000	80	RWL	-	-	14.37	665
LT285/60R18	122/119Q	E	(8.5)-10.0	31.5	11.5	18.9	3305	3000	80	RBL	-	-	14.37	665
LT285/65R18	121/118Q	D	(8.5)-10.0	32.6	11.5	18.9	3195	2910	65	OWL	POR	-	14.84	642
LT285/65R18	121/118Q	D	(8.5)-10.0	32.6	11.5	18.9	3195	2910	65	OBL	POR	-	14.84	642
LT285/65R18	125/122Q	E	(8.5)-10.0	32.6	11.5	18.9	3640	3305	80	OWL	-	-	14.84	642
LT285/65R18	125/122Q	E	(8.5)-10.0	32.6	11.5	18.9	3640	3305	80	OBL	-	-	14.84	642
LT265/50R20	115/112Q	E	8.0-(8.5)-9.5	30.5	10.9	18.9	2680	2470	80	OWL	POR	-	14.17	686
LT265/50R20	115/112Q	E	8.0-(8.5)-9.5	30.5	10.9	18.9	2680	2470	80	OBL	POR	-	14.17	686
LT285/50R20	119/116Q	E	8.5-(9.0)-10.0	31.3	11.7	18.9	3000	2755	80	OWL	POR	-	14.49	669
LT285/50R20	119/116Q	E	8.5-(9.0)-10.0	31.3	11.7	18.9	3000	2755	80	OBL	POR	-	14.49	669
31x10.50R15LT	109Q	C	7.0-(8.5)-9.0	30.5	10.6	18.9	2270	-	51	OWL	POR	-	13.70	685
31x10.50R15LT	109Q	C	7.0-(8.5)-9.0	30.5	10.6	18.9	2270	-	51	OBL	POR	-	13.70	685
32x11.50R15LT	113Q	C	7.5-(9.0)-10.0	31.5	11.4	18.9	2535	-	51	OWL	POR	-	14.13	663
32x11.50R15LT	113Q	C	7.5-(9.0)-10.0	31.5	11.4	18.9	2535	-	51	OBL	POR	-	14.13	663
33x12.50R15LT	108Q	C	8.0-(10.0)-10.5	32.5	12.5	18.9	2205	-	35	OWL	POR	-	14.53	643
33x12.50R15LT	108Q	C	8.0-(10.0)-10.5	32.5	12.5	18.9	2205	-	35	OBL	POR	-	14.53	643
35x12.50R15LT	113Q	C	8.0-(10.0)-10.5	34.5	12.5	20.2	2535	-	35	OBL	POR	-	15.31	606
37x12.50R16.5LT	134N	E	8.25-(9.75)-10.5	36.5	12.5	20.2	4675	-	65	OBL	-	-	16.26	572
37x12.50R16.5LT	134N	E	8.25-(9.75)-10.5	36.5	12.5	20.2	4675	-	65	OBL	-	-	16.26	572
33x12.50R17LT	114Q	D	8.5-(10.0)-11.0	32.5	12.5	18.9	2600	-	51	OWL	POR	-	14.72	643
33x12.50R17LT	114Q	D	8.5-(10.0)-11.0	32.5	12.5	18.9	2600	-	51	OBL	POR	-	14.72	643
35x12.50R17LT	121Q	E	8.0-(10.0)-10.5	34.5	12.5	20.2	3195	-	65	OWL	POR	-	15.51	606
35x12.50R17LT	121Q	E	8.0-(10.0)-10.5	34.5	12.5	20.2	3195	-	65	OBL	POR	-	15.51	606
37x12.50R17LT	124Q	D	8.0-(10.0)-10.5	36.5	12.5	20.2	3525	-	51	OBL	-	-	16.30	572
40x13.50R17LT	121Q	D	9.0-(11.0)-11.5	39.5	13.6	20.2	3195	-	51	RBL	POR	-	17.52	529
33x12.50R18LT	118Q	E	8.5-(10.0)-11.0	32.5	12.5	18.9	2910	-	65	OWL	POR	-	14.80	643
33x12.50R18LT	118Q	E	8.5-(10.0)-11.0	32.5	12.5	18.9	2910	-	65	OBL	POR	-	14.80	643
35x12.50R18LT	118Q	D	8.5-(10.0)-11.0	34.5	12.5	20.2	2910	-	51	OWL	POR	-	15.63	606
35x12.50R18LT	118Q	D	8.5-(10.0)-11.0	34.5	12.5	20.2	2910	-	51	OBL	POR	-	15.63	606
35x12.50R18LT	123Q	E	8.5-(10.0)-11.0	34.5	12.5	20.2	3415	-	65	OWL	-	-	15.63	606
35x12.50R18LT	123Q	E	8.5-(10.0)-11.0	34.5	12.5	20.2	3415	-	65	OBL	-	-	15.63	606
37x13.50R18LT	128Q	E	9.5-(11.0)-12.0	36.5	13.6	20.2	3970	-	65	RWL	-	-	16.42	572
37x13.50R18LT	128Q	E	9.5-(11.0)-12.0	36.5	13.6	20.2	3970	-	65	RBL	-	-	16.42	572
33x12.50R20LT	114Q	E	8.5-(10.0)-11.0	32.5	12.5	18.9	2600	-	65	OWL	POR	-	15.00	643
33x12.50R20LT	114Q	E	8.5-(10.0)-11.0	32.5	12.5	18.9	2600	-	65	OBL	POR	-	15.00	643
35x12.50R20LT	121Q	E	8.5-(10.0)-11.0	34.5	12.5	20.2	3195	-	65	OWL	POR	-	15.83	606
35x12.50R20LT	121Q	E	8.5-(10.0)-11.0	34.5	12.5	20.2	3195	-	65	OBL	POR	-	15.83	606
35x13.50R20LT	121Q	E	9.5-(11.0)-12.0	34.5	13.6	20.2	3195	-	65	OWL	POR	-	15.83	606
35x13.50R20LT	121Q	E	9.5-(11.0)-12.0	34.5	13.6	20.2	3195	-	65	OBL	POR	-	15.83	606
37x13.50R20LT	121Q	D	9.5-(11.0)-12.0	36.5	13.6	20.2	3195	-	51	OBL	POR	-	16.61	572
37x13.50R20LT	127Q	E	9.5-(11.0)-12.0	36.5	13.6	20.2	3860	-	65	OBL	-	-	16.61	572
38x15.50R20LT	125Q	D	11.0-(12.5)-14.0	37.5	15.6	20.8	3640	-	51	OBL	-	-	17.01	557
40x15.50R20LT	128Q	D	11.0-(12.5)-14.0	39.5	15.6	20.2	3970	-	51	RBL	-	-	17.80	529
33x12.50R22LT	109Q	E	10.0-(10.5)-12.0	32.5	12.5	18.9	2270	-	65	OBL	-	-	15.20	643
35x12.50R22LT	117Q	E	8.5-(10.0)-11.0	34.5	12.5	20.2	2835	-	65	OBL	POR	-	16.02	606
37x13.50R22LT	123Q	E	9.5-(11.0)-12.0	36.5	13.6	20.2	3415	-	65	OBL	-	-	16.81	572
33x12.50R24LT	104Q	E	10.5-(11.5)-12.5	32.5	12.6	18.9	1985	-	65	OBL	-	-	15.39	643
33x13.50R24LT	109Q	F	11.0-(12.5)-13.5	32.8	13.6	18.9	2270	-	80	RBL	POR	-	15.51	638

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUALMAX LOAD(LBS)	MAX INFL (PSI)	SIDE WALL	POR	UTQG	STATIC LOADED RADIUS(IN.)	REVS PER MILE
33x14.50R24LT	110Q	F	11.0-(12.5)-13.5	32.8	14.4	18.9	2335	-	80	RBL	POR	-	15.51	638
35x12.50R24LT	113Q	E	10.0-(10.5)-12.0	34.5	12.4	20.2	2535	-	65	OBL	-	-	16.22	606
35x13.50R24LT	118Q	F	11.5-(12.0)-13.5	34.5	13.4	20.2	2910	-	80	RBL	POR	-	16.22	606
37x13.50R24LT	120Q	E	9.5-(11.0)-12.0	36.5	13.6	20.2	3085	-	65	OBL	-	-	17.01	572
40x15.50R24LT	128P	E	11.0-(12.5)-14.0	39.5	15.6	20.2	3970	-	65	OBL	-	-	18.23	529
33x13.50R26LT	107Q	E	12.0-(12.5)-13.5	32.8	13.8	17.6	2150	-	65	OWL	POR	-	15.71	638
33x13.50R26LT	107Q	E	12.0-(12.5)-13.5	32.8	13.8	17.6	2150	-	65	OBL	POR	-	15.71	638
35x13.50R26LT	118Q	E	12.0-(12.5)-13.0	34.5	13.4	20.2	2910	-	65	OWL	POR	-	16.42	606
35x13.50R26LT	118Q	E	12.0-(12.5)-13.0	34.5	13.4	20.2	2910	-	65	OBL	POR	-	16.42	606
37x13.50R26LT	117Q	E	11.5-(12.0)-13.5	36.5	13.6	20.2	2835	-	65	OBL	-	-	17.20	572
40x15.50R26LT	127P	E	12.5-(13.0)-14.5	39.5	15.6	20.8	3840	-	65	OBL	-	-	18.43	529
42x15.50R28LT	128P	E	12.5-(13.0)-14.5	41.5	15.6	20.8	3970	-	65	OBL	-	-	19.41	503

CF3300



M/T M+S



Features and Benefits



1. Wider tread width:

To improve tire grip effectively.

2. Multiply tread compound:

To provide outstanding traction, and increase the performance of cut resistance and tear resistance.

3. Strong tire shoulder structure and sidewall pattern blocks:

To protect tires well on all bad road conditions.

4. Powerful tire design:

All sizes with 3ply tire body and rim protector.

Rim Diameter:

17-20 inch

Aspect Ratio:

70s-55s

Speed Rating:

Q

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUALMAX LOAD(LBS)	MAX INFL. (PSI)	SIDE WALL	POR	UTQG	STATIC LOADED RADIUS(IN.)	REVS PER MILE
LT315/75R16	127/124Q	E	8.0-(8.5)-10.5	34.6	12.3	20.2	3860	3525	65	RWL	-	-	15.90	807
LT245/70R17	119/116Q	E	6.5-(7.0)-8.0	30.6	9.8	18.9	3000	2755	80	RWL	POR	-	14.09	796
LT265/70R17	121/118Q	E	7.0-(8.0)-9.0	31.7	10.7	18.9	3195	2910	80	RWL	POR	-	14.37	661
LT265/70R17	121/118Q	E	7.0-(8.0)-9.0	31.7	10.7	18.9	3195	2910	80	RBL	POR	-	14.37	661
LT285/70R17	121/118Q	E	7.5-(8.5)-9.5	32.8	11.5	18.9	3195	2910	80	RWL	POR	-	14.80	638
LT285/70R17	121/118Q	E	7.5-(8.5)-9.5	32.8	11.5	18.9	3195	2910	80	RBL	POR	-	14.80	638
LT295/70R17	121/118Q	E	7.5-(8.5)-10.0	33.3	11.8	20.2	3195	2910	80	RWL	POR	-	15.04	628
LT295/70R17	121/118Q	E	7.5-(8.5)-10.0	33.3	11.8	20.2	3195	2910	80	RBL	POR	-	15.04	628
LT315/70R17	121/118Q	F	8.0-(9.5)-10.5	34.4	12.7	20.2	3195	2910	80	RWL	POR	-	15.47	608
LT315/70R17	121/118Q	F	8.0-(9.5)-10.5	34.4	12.7	20.2	3195	2910	80	RBL	POR	-	15.47	608
LT285/65R18	125/122Q	E	(8.5)-10.0	32.6	11.5	18.9	3640	3305	80	RWL	-	-	14.84	642
LT285/65R18	125/122Q	E	(8.5)-10.0	32.6	11.5	18.9	3640	3305	80	RBL	-	-	14.84	642
LT265/50R20	115/112Q	E	8.0-(8.5)-9.5	30.5	10.9	18.9	2680	2470	80	RBL	POR	-	14.17	686
LT275/55R20	120/117Q	E	8.0-(8.5)-9.5	31.9	11.2	18.9	3085	2835	80	RWL	POR	-	14.76	656
LT275/55R20	120/117Q	E	8.0-(8.5)-9.5	31.9	11.2	18.9	3085	2835	80	RBL	POR	-	14.76	656
LT285/55R20	122/119Q	E	8.5-(9.0)-10.0	32.4	11.7	18.9	3305	3000	80	RWL	-	-	14.96	646
LT285/55R20	122/119Q	E	8.5-(9.0)-10.0	32.4	11.7	18.9	3305	3000	80	RBL	-	-	14.96	646
LT305/55R20	125/122Q	E	9.0-(9.5)-11.0	33.2	12.4	20.2	3640	3305	80	RWL	-	-	15.28	629
LT305/55R20	125/122Q	E	9.0-(9.5)-11.0	33.2	12.4	20.2	3640	3305	80	RBL	-	-	15.28	629
33X12.50R15LT	108Q	C	8.0-(10.0)-10.5	32.5	12.5	20.2	2205	-	35	RWL	POR	-	14.52	643
35X12.50R15LT	113Q	C	8.0-(10.0)-10.5	34.5	12.5	20.2	2535	-	35	RWL	POR	-	15.31	606
35x13.50R17LT	121Q	F	9.0-(11.0)-11.5	34.8	13.6	20.2	3195	-	80	RWL	POR	-	15.59	602
35x13.50R17LT	121Q	F	9.0-(11.0)-11.5	34.8	13.6	20.2	3195	-	80	RBL	POR	-	15.59	602
37x13.50R17LT	125Q	F	9.0-(11.0)-11.5	36.5	13.6	20.2	3640	-	80	RBL	-	-	16.30	572
35x12.50R20LT	125Q	F	8.5-(10.0)-11.0	34.5	12.5	20.2	3640	-	80	RWL	-	-	15.83	606
35x12.50R20LT	125Q	F	8.5-(10.0)-11.0	34.5	12.5	20.2	3640	-	80	RBL	-	-	15.83	606



EF1500



EAT M+S 
SILENT FOAM



Features and Benefits



1. Strengthened tire shoulder and zigzag groove, provide extra traction power in multiply off-road condition, perfectly adapted to various terrain.
2. Leaf shape design, represents environmentally-friendly, energy efficiency and environmental protection.
3. Open and high density groove layout, provides perfect drainage ability between tire tread and road surface, therefore increase tire tractionlevel in wet road condition.
4. Raised rubber vein in tire shoulder, effectively blocks noise to spread, which reduces tire noise level.

Rim Diameter:

19-22 inch

Aspect Ratio:

55s-35s

Speed Rating:

H/V/W


TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
245/45R18	100V	XL	7.5-(8.0)-9.0	26.7	9.6	10.1	800	340	420AA	C	B	72	12.91	766
225/50R18	95V	SL	6.0-(7.0)-8.0	26.9	9.2	10.1	1521	300	420AA	C	B	72	13.22	753
235/50R18	101V	XL	6.5-(7.5)-8.5	27.3	9.6	10.1	825	340	420AA	C	B	72	13.46	731
245/50R18	104V	XL	7.0-(7.5)-8.5	27.7	10.0	10.1	900	340	420AA	C	B	72	14.06	697
215/55R18	95V	SL	6.0-(7.0)-7.5	27.3	8.9	10.1	690	300	420AA	C	B	72	13.27	742
225/55R18	98V	SL	6.0-(7.0)-8.0	27.8	9.2	10.1	1653	300	420AA	C	B	72	12.85	778
235/55R18	100V	SL	6.5-(7.5)-8.5	28.1	9.6	10.1	800	300	420AA	C	B	72	12.91	768
225/60R18	100H	SL	6.0-(6.5)-8.0	28.6	9.0	10.1	800	300	420AA	C	B	72	13.07	757
235/60R18	107V	XL	6.5-(7.0)-8.5	29.1	9.4	10.1	2149	340	420AA	C	B	72	13.79	719
235/65R18	106H	SL	6.5-(7.0)-8.5	30.0	9.4	10.1	950	300	420AA	C	B	72	12.64	784
225/45R19	96V	XL	7.0-(7.5)-8.5	27.0	8.9	10.1	710	340	420AA	C	B	72	13.31	722
235/45R19	99V	XL	7.5-(8.0)-9.0	27.4	9.3	10.1	775	340	420AA	C	B	72	12.83	775
245/45R19	102V	XL	7.5-(8.0)-9.0	27.7	9.6	10.1	1874	340	420AA	C	B	72	13.46	712
255/45R19	104V	XL	8.0-(8.5)-9.5	28.1	10.0	10.1	1984	340	420AA	C	B	72	13.15	734
235/50R19	103V	XL	6.5-(7.5)-8.5	28.3	9.6	10.1	1929	340	420AA	C	B	72	13.03	765
245/50R19	105V	XL	7.0-(7.5)-8.5	28.7	10.0	10.1	925	340	420AA	C	B	72	13.66	701
255/50R19	107V	XL	7.0-(8.0)-9.0	29.1	10.4	10.1	2149	340	420AA	C	B	72	13.58	730
225/55R19	103V	XL	6.0-(7.0)-8.0	28.8	9.2	10.1	1929	340	420AA	C	B	72	12.87	751
235/55R19	105V	XL	6.5-(7.5)-8.5	29.2	9.6	10.1	2039	340	420AA	C	B	73	13.82	692
245/55R19	107V	XL	7.0-(7.5)-8.5	29.6	10.0	10.1	2149	340	420AA	C	B	73	13.43	714
255/55R19	111V	XL	7.0-(8.0)-9.0	30.0	10.4	10.1	2403	340	420AA	C	B	73	13.03	740
275/40R20	106V	XL	9.0-(9.5)-11.0	28.7	10.9	10.7	2094	340	420AA	C	B	72	13.98	689
305/40R20	112V	XL	10.0-(11.0)-12.0	29.6	12.3	10.7	2469	340	420AA	C	B	72	13.62	709
245/45R20	103W	XL	7.5-(8.0)-9.0	28.7	9.6	10.1	1929	340	420AA	C	B	72	14.06	705
255/45R20	105V	XL	8.0-(8.5)-9.5	29.1	10.0	10.1	2039	340	420AA	C	B	72	13.39	725
265/45R20	108V	XL	8.5-(9.0)-10.0	29.4	10.5	10.7	1000	340	420AA	C	B	73	14.65	674
275/45R20	110V	XL	8.5-(9.0)-10.5	29.8	10.7	10.7	2337	340	420AA	C	B	73	13.94	691
285/45R20	112V	XL	9.0-(9.5)-10.5	30.1	11.2	10.7	1120	340	420AA	C	B	73	13.54	715
235/50R20	104W	XL	6.5-(7.5)-8.5	29.3	9.6	10.1	1984	340	420AA	C	B	73	14.41	687
245/50R20	102V	SL	7.0-(7.5)-8.5	29.7	10.0	10.1	850	300	420AA	C	B	73	13.94	712
255/50R20	109H	XL	7.0-(8.0)-9.0	30.1	10.4	10.1	2271	340	420AA	C	B	73	14.25	673
265/50R20	111V	XL	7.5-(8.5)-9.5	30.5	10.9	10.7	1090	340	420AA	C	B	73	13.82	698
275/50R20	113H	XL	7.5-(8.5)-9.5	30.9	11.2	10.1	2535	340	420AA	C	B	73	13.39	725
235/55R20	105V	XL	6.5-(7.5)-8.5	30.2	9.6	10.1	2039	340	420AA	C	B	75	14.25	695
255/55R20	110V	XL	7.0-(8.0)-9.0	31.0	10.4	10.1	1060	340	420AA	C	B	75	13.74	702
255/35R21	98V	XL	8.5-(9.0)-10.0	28.0	10.2	10.1	750	340	420AA	C	B	72	14.02	713
275/35R21	103V	XL	9.0-(9.5)-11.0	28.5	10.9	10.7	875	340	420AA	C	B	73	14.29	697
315/35R21	111V	XL	10.5-(11.0)-12.5	29.6	12.6	10.7	2403	340	420AA	C	B	73	13.86	721
255/40R21	102V	XL	8.5-(9.0)-10.0	29.0	10.2	10.1	850	340	420AA	C	B	73	13.43	747
265/40R21	105V	XL	9.0-(9.5)-10.5	29.3	10.7	10.7	925	340	420AA	C	B	73	14.13	684
275/40R21	107V	XL	9.0-(9.5)-11.0	29.6	10.9	10.7	2149	340	420AA	C	B	73	14.02	713
285/40R21	109V	XL	9.5-(10.0)-11.0	30.0	11.4	10.7	2271	340	420AA	C	B	73	14.29	676
235/45R21	101V	XL	7.5-(8.0)-9.0	29.3	9.3	10.1	825	340	420AA	C	B	73	13.86	701
255/45R21	106V	XL	8.0-(8.5)-9.5	30.0	10.0	10.1	950	340	420AA	C	B	73	13.66	732
265/45R21	108V	XL	8.5-(9.0)-10.0	30.4	10.5	10.7	2205	340	420AA	C	B	75	14.41	669
275/45R21	110V	XL	8.5-(9.0)-10.5	30.7	10.7	10.7	2337	340	420AA	C	B	75	13.98	693
285/45R21	113V	XL	9.0-(9.5)-10.5	31.1	11.2	10.7	1150	340	420AA	C	B	75	13.86	701
315/35R22	111V	XL	10.5-(11.0)-12.5	30.7	12.6	10.7	1090	340	420AA	C	B	73	14.80	674
265/40R22	106W	XL	9.0-(9.5)-10.5	30.4	10.7	10.7	2094	340	420AA	C	B	73	14.25	684
275/40R22	108V	XL	9.0-(9.5)-11.0	30.7	10.9	10.7	1000	340	420AA	C	B	73	14.65	682
285/40R22	110V	XL	9.5-(10.0)-11.0	31.0	11.4	10.7	1060	340	420AA	C	B	75	14.76	675
255/45R22	107V	XL	8.0-(8.5)-9.5	31.1	10.0	10.1	975	340	420AA	C	B	75	14.65	681



HT M+S



Features and Benefits



- 1. Designed for paved road use**
- 2. Zigzag sipes on the shoulder block and tread:**
are for reducing noise level and improving traction in both wet and dry conditions.
- 3. 4 circumferential grooves:**
for excellent water evacuation for good wet traction.
- 4. Wider center rib:**
for stable handling at high speed straight line driving.

Rim Diameter:
14-20 inch

Aspect Ratio:
75s-50s

Speed Rating:
S/T/H/V/W

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
205/70R14	95H	SL	5.0-(6.0)-7.0	25.4	8.2	10.7	1521	-	44	420AA	D	D	71	11.42	819
205/70R15	96H	SL	5.0-(6.0)-7.0	26.3	8.2	10.7	1565	-	44	420AA	C	D	71	11.93	789
215/75R15	100H	SL	5.5-(6.0)-7.0	27.7	8.5	10.7	1764	-	44	420AA	C	D	71	12.44	751
225/75R15	102H	SL	(6.0)-7.5	28.3	8.8	10.7	1874	-	44	420AA	C	D	71	12.68	734
235/75R15	105H	SL	6.0-(6.5)-8.0	28.9	9.3	10.7	2039	-	44	420AA	C	D	71	12.91	720
205/60R16	92V	SL	5.5-(6.0)-7.5	25.7	8.2	10.7	1389	-	44	420AA	D	D	71	11.77	809
205/65R16	95H	SL	5.5-(6.0)-7.5	26.5	8.2	10.7	1521	-	44	420AA	D	D	71	12.09	785
215/65R16	102H	XL	6.0-(6.5)-7.5	27.0	8.7	10.7	1874	-	50	420AA	C	D	71	12.28	769
215/70R16	100H	SL	5.5-(6.5)-7.0	27.9	8.7	10.7	1764	-	44	420AA	C	D	71	12.64	745
225/70R16	103H	SL	6.0-(6.5)-7.5	28.4	9.0	10.7	1929	-	44	420AA	C	D	71	12.83	731
235/70R16	106H	SL	6.0-(7.0)-8.0	29.0	9.4	10.7	2094	-	44	420AA	C	D	71	13.07	717
245/70R16	107H	SL	6.5-(7.0)-8.0	29.5	9.8	10.7	2149	-	44	420AA	D	D	71	13.27	704
255/70R16	111H	SL	6.5-(7.5)-8.5	30.1	10.2	11.1	2403	-	44	420AA	D	D	71	13.50	691
265/70R16	112H	SL	7.0-(8.0)-9.0	30.6	10.7	11.1	2469	-	44	420AA	D	D	71	13.70	678
275/70R16	114H	SL	7.0-(8.0)-9.0	31.2	11.0	11.1	2601	-	44	420AA	D	D	72	13.94	666
265/75R16	116T	SL	7.0-(7.5)-9.0	31.7	10.5	11.1	2756	-	44	420AA	D	D	71	14.09	656
235/55R17	103W	XL	6.5-(7.5)-8.5	27.2	9.6	10.7	1929	-	50	420AA	C	D	71	12.48	765
215/60R17	96V	SL	6.0-(6.5)-7.5	27.2	8.7	10.7	1565	-	44	420AA	D	D	71	12.48	765
225/60R17	103H	XL	6.0-(6.5)-8.0	27.6	9.0	10.7	1929	-	50	420AA	C	D	71	12.64	752
235/60R17	106H	XL	6.5-(7.0)-8.5	28.1	9.4	10.7	2094	-	50	420AA	C	D	71	12.83	739
225/65R17	102H	SL	6.0-(6.5)-8.0	28.5	9.0	10.7	2205	-	44	420AA	C	D	71	12.99	729
235/65R17	108H	XL	6.5-(7.0)-8.5	29.1	9.4	10.7	2205	-	50	420AA	C	D	71	13.19	715
245/65R17	107H	SL	(7.0)-8.5	29.5	9.8	10.7	2149	-	44	420AA	D	D	71	13.39	704
255/65R17	110H	SL	7.0-(7.5)-9.0	30.1	10.2	11.1	2337	-	44	420AA	D	D	71	13.58	691
265/65R17	112H	SL	7.5-(8.0)-9.5	30.6	10.7	11.1	2469	-	44	420AA	D	D	71	13.78	680
275/65R17	119H	XL	7.5-(8.0)-9.5	31.1	11.0	11.1	3000	-	50	420AA	D	D	72	14.02	668
285/65R17	116H	SL	8.0-(8.5)-10.0	31.6	11.5	11.1	2756	-	44	420AA	D	D	72	14.17	658
235/50R18	101W	XL	6.5-(7.5)-8.5	27.3	9.6	10.7	1819	-	50	420AA	C	D	71	12.64	761
215/55R18	99W	XL	6.0-(7.0)-7.5	27.3	8.9	10.7	1709	-	50	420AA	D	D	71	12.64	761
235/55R18	104W	XL	6.5-(7.5)-8.5	28.1	9.6	10.7	1984	-	50	420AA	C	D	71	12.95	738
235/60R18	107H	XL	6.5-(7.0)-8.5	29.1	9.4	10.7	2149	-	50	420AA	D	D	71	13.31	714
265/60R18	114H	XL	7.5-(8.0)-9.5	30.5	10.7	11.1	2601	-	50	420AA	D	D	72	13.90	681
265/65R18	114H	SL	7.5-(8.0)-9.5	31.5	10.7	11.1	2601	-	44	420AA	C	D	71	14.29	659
275/65R18	116H	SL	7.5-(8.0)-9.5	32.1	11.0	11.1	2756	-	44	420AA	D	D	71	14.49	647
275/60R20	115H	SL	7.5-(8.0)-9.5	33.0	11.0	11.1	2679	-	44	420AA	C	D	72	15.08	630
LT215/75R15	116/114S	E	5.5-(6.0)-7.0	27.7	8.5	10.7	2755	2600	80	-	D	D	72	12.56	756
245/70R17LT	119/116S	E	6.5-(7.0)-8.0	30.6	9.8	13.6	3000	2755	80	-	D	D	72	13.94	684
265/70R17LT	121/118S	E	7.0-(8.0)-9.0	31.7	10.7	13.6	3195	2910	80	-	D	D	72	14.37	661



CUV/SUV

M+S



Features and Benefits



- 1. Asymmetric tread design:**
For excellent riding stability and precise handling on wet roads.
- 2. Various sipes and Lateral grooves:**
Efficiently reduce the riding noise.
- 3. 4 Circumferential grooves:**
for excellent water evacuation minimize the risk of aquaplaning at high speed.
- 4. Silica tread compound:**
For lower rolling resistance and better grip performance.

Rim Diameter:
18-21 inch

Aspect Ratio:
60s-35s

Speed Rating:
H/V/W/Y

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	STATIC LOADED RADIUS(IN.)	REVS PER MILE
245/50ZR18	104W	XL	7.0-(7.5)-8.5	27.7	10.0	10.5	1984	50	320AA	12.76	751
225/55ZR18	102W	XL	6.0-(7.0)-8.0	27.8	9.2	10.3	1874	50	320AA	12.80	748
255/55ZR18	109W	XL	7.0-(8.0)-9.0	29.0	10.4	10.5	2271	50	320AA	13.31	716
225/60R18	104H	XL	6.0-(6.5)-8.0	28.6	9.0	10.3	1984	50	320AA	13.15	726
245/60R18	105V	SL	(7.0)-8.5	29.6	9.8	10.5	2039	44	320AA	13.50	703
255/55ZR19	111W	XL	7.0-(8.0)-9.0	30.0	10.4	10.5	2403	50	320AA	13.82	692
245/40ZR20	99Y	XL	8.0-(8.5)-9.5	27.7	9.8	10.5	1709	50	320AA	12.99	749
275/40R20	106W	XL	9.0-(9.5)-11.0	28.7	10.9	10.7	2094	50	320AA	13.39	725
275/45ZR20	110W	XL	8.5-(9.0)-10.5	29.8	10.7	10.7	2337	50	320AA	13.82	698
265/50ZR20	111W	XL	7.5-(8.5)-9.5	30.5	10.9	10.5	2403	50	320AA	14.09	682
285/50ZR20	116W	XL	8.5-(9.0)-9.5	31.3	11.7	10.5	2756	50	320AA	14.41	665
275/55ZR20	117W	XL	7.5-(8.5)-9.5	31.9	11.2	10.7	2833	50	320AA	14.65	651
295/35ZR21	107W	XL	10.0-(10.5)-11.5	29.1	11.9	10.7	2149	50	320AA	13.66	714

CF510



HP M+S



Features and Benefits



1. 4 wide longitudinal groovest:

Provide rapid water drainage and ensure the safety on wet roads.

2. Variable pitch and Optimized lateral groove angles:

Efficiently reduce the riding noise.

3. Optimized ground Contact shape:

Reduces the rolling resistance and enhances the riding stability.

4. Silica tread compound:

With high percentage of silica enhances the grip performance on the wet surface.

Rim Diameter:

13-17 inch

Aspect Ratio:

80s-50s

Speed Rating:

H/T/V/W

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL. (PSI)	SIDE WALL	UTQG	FE	WG	ERN(C)(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
175/60R13	77H	SL	(5.0)-6.0	21.3	7.0	9.4	908	44	-	440AA	D	B	69	9.72	977
165/65R13	77T	SL	4.5-(5.0)-6.0	21.4	6.7	9.4	908	44	-	440AA	D	B	70	9.76	970
185/70R13	86H	SL	4.5-(5.5)-6.0	23.2	7.4	10.1	1168	44	-	440AA	D	B	69	10.47	894
155/80R13	79T	SL	4.0-(4.5)-5.0	22.8	6.2	9.4	963	44	-	440AA	D	B	70	10.31	913
185/60R14	82H	SL	5.0-(5.5)-6.5	22.8	7.4	9.4	1047	44	-	440AA	D	B	69	10.43	913
195/60R14	86H	SL	5.5-(6.0)-7.0	23.2	7.9	10.3	1168	44	-	440AA	D	B	69	10.59	894
205/60R14	88H	SL	5.5-(6.0)-7.5	23.7	8.2	9.4	1235	44	-	440AA	D	B	70	10.79	876
205/60R14	88H	SL	5.5-(6.0)-7.5	23.7	8.2	9.4	1235	44	RWL	440AA	D	B	70	10.79	876
235/60R14	96H	SL	6.5-(7.0)-8.5	25.1	9.4	9.4	1565	44	-	440AA	D	B	71	11.34	827
185/65R14	86H	SL	5.0-(5.5)-6.5	23.5	7.4	9.4	1168	44	-	440AA	D	B	69	10.71	885
195/65R14	89H	SL	5.5-(6.0)-7.0	24.0	7.9	10.3	1279	44	-	440AA	D	B	69	10.91	865
185/70R14	88H	SL	4.5-(5.5)-6.0	24.3	7.4	9.4	1235	44	-	440AA	D	B	69	10.98	857
195/70R14	91H	SL	5.0-(6.0)-6.5	24.8	7.9	10.1	1356	44	-	440AA	D	B	69	11.22	838
205/70R14	95H	SL	5.0-(6.0)-7.0	25.4	8.2	10.3	1521	44	-	440AA	D	B	69	11.42	819
215/70R14	96H	SL	5.5-(6.5)-7.0	25.9	8.7	10.3	1565	44	-	440AA	D	B	69	11.65	802
195/50R15	82V	SL	5.5-(6.0)-7.0	22.7	7.9	10.1	1047	44	-	440AA	D	B	69	10.51	914
205/50R15	86V	SL	5.5-(6.5)-7.5	23.1	8.4	10.3	1168	44	-	440AA	D	B	69	10.67	899
185/55R15	82V	SL	5.0-(6.0)-6.5	23.0	7.6	9.4	1047	44	-	440AA	D	B	69	10.63	902
195/55R15	85V	SL	5.5-(6.0)-7.0	23.4	7.9	9.4	1135	44	-	440AA	D	B	69	10.79	887
205/55R15	88V	SL	5.5-(6.5)-7.5	23.9	8.4	10.3	1235	44	-	440AA	D	B	69	10.98	869
185/60R15	84H	SL	5.0-(5.5)-6.5	23.7	7.4	9.4	1102	44	-	440AA	D	B	69	10.91	875
195/60R15	88H	SL	5.5-(6.0)-7.0	24.2	7.9	9.4	1235	44	-	440AA	D	B	69	11.10	858
195/60R15	88H	SL	5.5-(6.0)-7.0	24.2	7.9	9.4	1235	44	RWL	440AA	D	B	69	11.10	858
205/60R15	91V	SL	5.5-(6.0)-7.5	24.7	8.2	9.4	1356	44	-	440AA	D	B	69	11.26	842
205/60R15	91V	SL	5.5-(6.0)-7.5	24.7	8.2	9.4	1356	44	RWL	440AA	D	B	69	11.26	842
215/60R15	94H	SL	6.0-(6.5)-7.5	25.2	8.7	10.3	1477	44	-	440AA	D	B	69	11.46	826
225/60R15	96V	SL	6.0-(6.5)-8.0	25.6	9.0	10.3	1565	44	-	440AA	D	B	69	11.65	811
235/60R15	98H	SL	6.5-(7.0)-8.5	26.1	9.4	10.3	1653	44	-	440AA	D	B	71	11.81	796
185/65R15	88H	SL	5.0-(5.5)-6.5	24.4	7.4	9.4	1235	44	-	440AA	D	B	69	11.18	850
195/65R15	91H	SL	5.5-(6.0)-7.0	25.0	7.9	9.4	1356	44	-	440AA	D	B	69	11.42	831
205/65R15	94H	SL	5.5-(6.0)-7.5	25.5	8.2	9.4	1477	44	-	440AA	D	B	69	11.57	816
215/65R15	96H	SL	6.0-(6.5)-7.5	26.0	8.7	10.3	1565	44	-	440AA	D	B	69	11.81	798
205/70R15	96H	SL	5.0-(6.0)-7.0	26.3	8.2	10.3	1565	44	-	440AA	D	B	69	11.93	789
215/70R15	98H	SL	5.5-(6.5)-7.0	26.9	8.7	10.3	1653	44	-	440AA	D	B	69	12.13	773
195/55R16	87V	SL	5.5-(6.0)-7.0	24.4	7.9	9.4	1201	44	-	440AA	D	B	69	11.26	851
205/55R16	91V	SL	5.5-(6.5)-7.5	24.9	8.4	9.4	1356	44	-	440AA	D	B	69	11.46	835
195/60R16	89H	SL	5.5-(6.0)-7.0	25.2	7.9	10.3	1279	44	-	440AA	D	B	69	11.57	824
205/60R16	92V	SL	5.5-(6.0)-7.5	25.7	8.2	10.3	1389	44	-	440AA	D	B	69	11.77	809
215/60R16	99V	XL	6.0-(6.5)-7.5	26.1	8.7	9.4	1709	50	-	440AA	D	B	70	11.97	795
225/60R16	98H	SL	6.0-(6.5)-8.0	26.6	9.0	10.3	1653	44	-	440AA	D	B	69	12.13	781
235/60R16	100H	SL	6.5-(7.0)-8.5	27.1	9.4	10.3	1764	44	-	440AA	D	B	69	12.32	767
195/60R17	90V	SL	5.5-(6.0)-7.0	26.2	7.9	9.8	1323	51	BSW	440AA	D	B	69	12.08	727

Comforser Tires

Driving Comfort


CF620



HP M+S



Features and Benefits

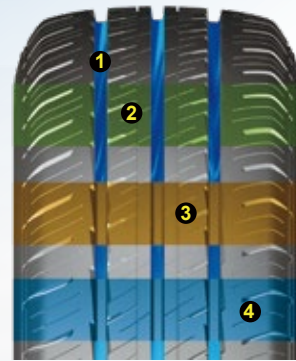

- 1. 3 wide straight grooves:**
Are designed for excellent water evacuation.
- 2. Deeper and wider tread design:**
For excellent riding stability, which ensures the safety and high mileage.
- 3. Unique tread:**
Are adopted for high mileage.
- 3. Special compound:**
Are adopted for excellent wear performance.

Rim Diameter:
13-16 inch

Aspect Ratio:
80s-55s

Speed Rating:
H/T/V

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNc(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
155/65R13	73T	SL	(4.5)-5.5	20.9	6.2	10.7	805	44	600AA	D	C	69	9.61	992
165/65R13	77T	SL	4.5-(5.0)-6.0	21.4	6.7	10.7	908	44	600AA	D	C	69	9.76	970
165/65R13	77T	SL	4.5-(5.0)-6.0	21.4	6.7	10.7	908	44	600AA	D	C	69	9.76	970
165/70R13	79T	SL	4.0-(5.0)-5.5	22.1	6.7	10.7	963	44	600AA	D	C	69	10.04	939
175/70R13	82H	SL	4.5-(5.0)-6.0	22.7	7.0	10.7	1047	44	600AA	D	C	69	10.28	916
185/70R13	86T	SL	4.5-(5.5)-6.0	23.2	7.4	11.3	1168	44	600AA	D	C	69	10.47	894
155/80R13	79T	SL	4.0-(4.5)-5.0	22.8	6.2	10.0	963	44	600AA	D	C	69	10.31	913
185/60R14	82H	SL	5.0-(5.5)-6.5	22.8	7.4	11.3	1047	44	600AA	D	C	69	10.43	913
195/60R14	86H	SL	5.5-(6.0)-7.0	23.2	7.9	11.3	1168	44	600AA	D	C	70	10.59	894
175/65R14	82H	SL	(5.0)-6.0	23.0	7.0	10.7	1047	44	600AA	D	C	69	10.51	903
185/65R14	86H	SL	5.0-(5.5)-6.5	23.5	7.4	11.3	1168	44	600AA	D	C	69	10.71	885
165/70R14	81T	SL	4.0-(5.0)-5.5	23.1	6.7	10.7	1019	44	600AA	D	C	69	10.55	897
175/70R14	84H	SL	4.5-(5.0)-6.0	23.7	7.0	10.7	1102	44	600AA	D	C	69	10.79	876
185/70R14	88H	SL	4.5-(5.5)-6.0	24.3	7.4	11.3	1235	44	600AA	D	C	69	10.98	857
165/80R14	85T	SL	4.0-(4.5)-5.5	24.4	6.5	10.5	1135	44	600AA	D	C	69	11.06	851
195/55R15	85V	SL	5.5-(6.0)-7.0	23.4	7.9	11.3	1135	44	600AA	D	C	70	10.79	887
185/60R15	84H	SL	5.0-(5.5)-6.5	23.7	7.4	11.3	1102	44	600AA	D	C	69	10.91	875
195/60R15	88H	SL	5.5-(6.0)-7.0	24.2	7.9	11.3	1235	44	600AA	D	C	70	11.10	858
205/60R15	91H	SL	5.5-(6.0)-7.5	24.7	8.2	11.3	1356	44	600AA	D	C	70	11.26	842
185/65R15	88H	SL	5.0-(5.5)-6.5	24.4	7.4	11.3	1235	44	600AA	D	C	69	11.18	850
195/65R15	91H	SL	5.5-(6.0)-7.0	25.0	7.9	11.3	1356	44	600AA	D	C	70	11.42	831
205/65R15	94H	SL	5.5-(6.0)-7.5	25.5	8.2	11.3	1477	44	600AA	D	C	70	11.57	816
205/55R16	94V	XL	5.5-(6.5)-7.5	24.9	8.4	11.3	1477	50	600AA	D	C	70	11.46	835
205/60R16	92H	SL	5.5-(6.0)-7.5	25.7	8.2	11.3	1389	44	600AA	D	C	70	11.77	809
215/60R16	95H	SL	6.0-(6.5)-7.5	26.1	8.7	11.3	1521	44	600AA	D	C	70	11.97	795
215/60R16	99H	XL	6.0-(6.5)-7.5	26.1	8.7	11.3	1709	50	600AA	-	-	-	11.97	795
205/65R16	95H	SL	5.5-(6.0)-7.5	26.5	8.2	11.3	1521	44	600AA	D	C	70	12.09	785


CF610



HP M+S



Features and Benefits

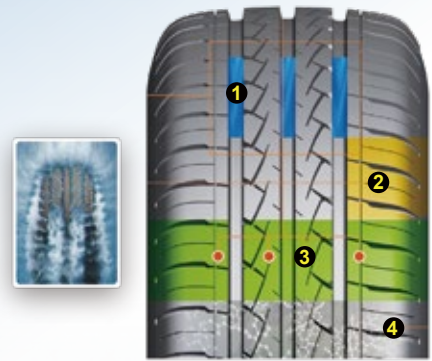

- 1. 3 wide longitudinal grooves :**
For excellent water evacuation and reduces aquaplaning at high speed.
- 2. Variable pitch and optimi-zed lateral grooves :**
Efficiently reduce the riding noise for a more comfortable driving.
- 3. Optimized ground contact shape:**
Raduces the rolling resist-ance and enhances the riding stability.
- 4. Compound formula:**
With high percentage of silica enhances the grip performance on the wet surface.

Rim Diameter:
13-15 inch

Aspect Ratio:
70s-55s

Speed Rating:
H/T/V

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
165/65R13	77T	SL	4.5-(5.0)-6.0	21.4	6.7	-	908	44	440AA	D	C	69	9.76	970
165/70R13	79T	SL	4.0-(5.0)-5.5	22.1	6.7	-	963	44	440AA	D	C	69	10.04	939
175/70R13	82T	SL	4.5-(5.0)-6.0	22.7	7.0	-	1047	44	440AA	D	C	69	10.28	916
165/55R14	72H	SL	4.5-(5.0)-6.0	21.2	6.7	-	783	44	440AA	D	C	69	9.80	981
175/65R14	82H	SL	(5.0)-6.0	23.0	7.0	-	1047	44	440AA	D	C	69	10.51	903
165/70R14	81H	SL	4.0-(5.0)-5.5	23.1	6.7	-	1019	44	440AA	D	C	69	10.55	897
175/70R14	84H	SL	4.5-(5.0)-6.0	23.7	7.0	-	1102	44	440AA	D	C	69	10.79	876
165/55R15	75V	SL	4.5-(5.0)-6.0	22.2	6.7	-	853	44	440AA	D	C	69	10.28	937
165/60R15	77H	SL	4.5-(5.0)-6.0	22.8	6.7	-	908	44	440AA	D	C	69	10.55	911
175/65R15	84H	SL	(5.0)-6.0	24.0	7.0	-	1102	44	440AA	D	C	69	10.98	866



Sports K4



HP M+S



Features and Benefits



- 1. Concise and fluent lines:**
Are showing the flexible and artistic pattern.
- 2. New-type environmental protection compound:**
Are adopted to lower the rolling resistance, and reduce the fuel consumption.
- 3. 3straight main grooves and serial rib:**
Are for excellent riding stability under both dry and wet road conditions.
- 4. Optimized pitch arrangement:**
Minimizes the noise level.

Rim Diameter:

14-16 inch

Aspect Ratio:

75s-40s

Speed Rating:

V/H/T

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL (PSI)	UTQG	FE	WG	ERNC(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
165/55R14	72V	SL	4.5-(5.0)-6.0	21.2	6.7	8.6	783	44	380AA	D	B	70	9.80	981
165/60R14	75H	SL	4.5-(5.0)-6.0	21.8	6.7	8.6	853	44	380AA	D	B	70	10.04	952
155/65R14	75T	SL	(4.5)-5.5	22.0	6.2	9.1	853	44	380AA	D	B	70	10.12	946
165/65R14	79S	SL	4.5-(5.0)-6.0	22.4	6.7	8.6	963	44	380AA	D	B	70	10.28	926
185/75R14	89H	SL	4.5-(5.0)-6.0	25.0	7.2	9.1	1279	44	380AA	D	B	70	11.26	832
165/45R15	68V	SL	5.0-(5.5)-6.0	20.8	6.5	8.6	695	44	380AA	D	B	70	9.76	997
165/50R15	73V	SL	4.5-(5.0)-6.0	21.5	6.7	8.6	805	44	380AA	D	B	70	10.04	965
165/55R15	75V	SL	4.5-(5.0)-6.0	22.2	6.7	8.6	853	44	380AA	D	B	70	10.28	937
175/55R15	77V	SL	5.0-(5.5)-6.0	22.6	7.2	9.1	908	44	380AA	D	B	70	10.43	921
155/60R15	74H	SL	(4.5)-5.5	22.3	6.2	9.1	827	44	380AA	D	B	70	10.35	931
165/60R15	77H	SL	4.5-(5.0)-6.0	22.8	6.7	8.6	908	44	380AA	D	B	70	10.55	911
175/60R15	81H	SL	(5.0)-6.0	23.3	7.0	9.1	1019	44	380AA	D	B	70	10.71	893
165/65R15	81H	SL	4.5-(5.0)-6.0	23.4	6.7	8.6	1019	44	380AA	D	B	70	10.79	887
165/40R16	73V	XL	(6.0)	21.2	6.7	8.6	805	50	380AA	D	B	70	10.00	981
165/45R16	74V	XL	5.0-(5.5)-6.0	21.8	6.5	8.6	827	50	380AA	D	B	70	10.28	952
165/50R16	75V	SL	4.5-(5.0)-6.0	22.5	6.7	8.6	853	44	380AA	D	B	70	10.55	922



Comforser Tires


Driving Comfort



UHP M+S



Features and Benefits

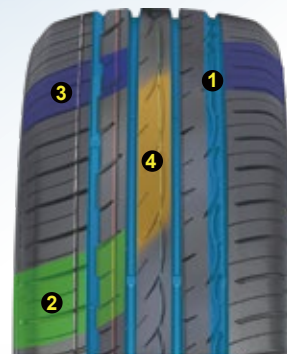

1. 3+1 Longitudinal grooves:

Enhance the wet grip performance to prevent the aquaplaning.

2. Variable pitch design:

From inside and outside greatly reduces the riding noise.

3. Asymmetric tread design:

Outside with strong shoulder for good turning stability, inside shoulder with multisipes for excellent water drainage.

4. Wider centre rib:

For stable handling with straight line driving at high speed.

Rim Diameter:

15-21 inch

Aspect Ratio:

55s-30s

Speed Rating:


V/W/Y

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
195/45R16	84V	XL	6.0-(6.5)-7.5	22.9	7.7	10.1	1102	50	380AA	D	B	69	10.71	907
205/45R16	83V	SL	6.5-(7.0)-7.5	23.2	8.1	10.1	1074	44	380AA	D	B	69	10.83	894
185/50R16	81V	SL	5.0-(6.0)-6.5	23.3	7.6	10.1	1019	44	380AA	D	B	68	10.87	891
195/50R16	84V	SL	5.5-(6.0)-7.0	23.7	7.9	10.1	1102	44	380AA	D	B	69	10.98	876
205/50R16	87W	SL	5.5-(6.5)-7.5	24.1	8.4	10.1	1201	44	380AA	D	B	69	11.14	862
205/55R16	91V	SL	5.5-(6.5)-7.5	24.9	8.4	10.1	1356	44	380AA	D	B	69	11.46	835
215/55R16	97V	XL	6.0-(7.0)-7.5	25.3	8.9	10.1	1609	50	380AA	D	B	69	11.61	822
215/55R16	97W	XL	6.0-(7.0)-7.5	25.3	8.9	10.1	1609	50	380AA	D	B	69	11.61	822
225/55R16	99W	XL	6.0-(7.0)-8.0	25.7	9.2	10.1	1709	50	380AA	D	B	70	11.81	807
195/40ZR17	81W	XL	6.5-(7.0)-7.5	23.1	7.9	10.1	1019	50	380AA	D	B	70	10.91	897
205/40ZR17	84W	XL	7.0-(7.5)-8.0	23.5	8.3	10.1	1102	50	380AA	D	B	69	11.02	885
205/45R17	88W	XL	6.5-(7.0)-7.5	24.3	8.1	10.1	1235	50	380AA	D	B	69	11.34	857
215/45ZR17	91W	XL	(7.0)-8.0	24.6	8.4	10.1	1356	50	380AA	D	B	69	11.50	843
225/45ZR17	94W	XL	7.0-(7.5)-8.5	25.0	8.9	10.1	1477	50	380AA	D	B	69	11.61	832
235/45ZR17	97W	X	7.5-(8.0)-9.0	25.4	9.3	10.3	1609	50	380AA	D	B	69	11.77	819
245/45ZR17	99W	XL	7.5-(8.0)-9.0	25.7	9.6	10.3	1709	50	380AA	D	B	69	11.89	809
255/45ZR17	102W	XL	8.0-(8.5)-9.5	26.1	10.0	10.5	1874	50	380AA	D	B	70	12.05	797
205/50R17	93W	XL	5.5-(6.5)-7.5	25.1	8.4	10.1	1433	50	380AA	D	B	69	11.65	827
215/50R17	95W	XL	6.0-(7.0)-7.5	25.5	8.9	10.1	1521	50	380AA	D	B	69	11.81	814
225/50R17	98W	XL	6.0-(7.0)-8.0	25.9	9.2	10.1	1653	50	380AA	D	B	69	11.97	802
235/50R17	100W	XL	6.5-(7.5)-8.5	26.3	9.6	10.3	1764	50	380AA	D	B	69	12.13	790
205/55R17	95W	XL	5.5-(6.5)-7.5	25.9	8.4	10.1	1521	50	380AA	D	B	69	11.97	802
215/55R17	98W	XL	6.0-(7.0)-7.5	26.3	8.9	10.1	1653	50	380AA	D	B	69	12.13	790
225/55R17	101W	XLL	6.0-(7.0)-8.0	26.8	9.2	10.1	1819	50	380AA	D	B	69	12.32	776

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
235/55R17	103W	XL	6.5-(7.5)-8.5	27.2	9.6	10.3	1929	50	380AA	D	B	69	12.48	765
215/35ZR18	84W	XL	7.0-(7.5)-8.5	23.9	8.6	10.1	1102	50	380AA	D	B	70	11.30	869
255/35ZR18	94Y	XL	8.5-(9.0)-10.0	25.0	10.2	10.7	1477	50	380AA	D	B	71	11.73	831
205/40ZR18	86W	XL	7.0-(7.5)-8.0	24.4	8.3	10.1	1168	50	380AA	D	B	69	11.50	850
215/40ZR18	89W	XL	7.0-(7.5)-8.5	24.8	8.6	10.1	1279	50	380AA	D	B	69	11.65	839
225/40ZR18	92W	XL	7.5-(8.0)-9.0	25.1	9.1	10.1	1389	50	380AA	D	B	69	11.77	828
235/40ZR18	95W	XL	8.0-(8.5)-9.5	25.4	9.5	10.3	1521	50	380AA	D	B	69	11.89	818
245/40ZR18	97W	XL	8.0-(8.5)-9.5	25.7	9.8	10.3	1609	50	380AA	D	B	69	12.01	808
255/40ZR18	99W	XL	8.5-(9.0)-10.0	26.0	10.2	10.7	1709	50	380AA	D	B	70	12.13	798
215/45ZR18	93W	XL	(7.0)-8.0	25.6	8.4	10.1	1433	50	380AA	D	B	69	11.97	811
225/45ZR18	95W	XL	7.0-(7.5)-8.5	25.9	8.9	10.1	1521	50	380AA	D	B	69	12.09	801
235/45ZR18	98W	XL	7.5-(8.0)-9.0	26.3	9.3	10.3	1653	50	380AA	D	B	69	12.24	789
245/45ZR18	100W	XL	7.5-(8.0)-9.0	26.7	9.6	10.3	1764	50	380AA	D	B	69	12.36	779
255/45ZR18	103W	XL	8.0-(8.5)-9.5	27.0	10.0	10.7	1929	50	380AA	D	B	70	12.52	768
295/30ZR19	100W	XL	(10.5)	26.0	11.9	10.7	1764	50	380AA	D	B	71	12.24	798
235/35ZR19	91W	XL	8.0-(8.5)-9.5	25.5	9.5	10.1	1356	50	380AA	D	B	70	12.01	816
245/35ZR19	93W	XL	8.0-(8.5)-9.5	25.8	9.8	10.3	1433	50	380AA	D	B	69	12.17	806
255/35ZR19	96Y	XL	8.5-(9.0)-10.0	26.0	10.2	10.7	1565	50	380AA	D	B	71	12.24	798
275/35ZR19	96Y	SL	9.0-(9.5)-11.0	26.6	10.9	10.7	1565	44	380AA	D	B	70	12.44	782
225/40ZR19	93W	XL	7.5-(8.0)-9.0	26.1	9.1	10.1	1433	50	380AA	D	B	69	12.28	796
235/40ZR19	96W	XL	8.0-(8.5)-9.5	26.4	9.5	10.3	1565	50	380AA	D	B	69	12.40	786
245/40ZR19	98W	XL	8.0-(8.5)-9.5	26.7	9.8	10.3	1653	50	380AA	D	B	69	12.52	777
255/40ZR19	100Y	XL	8.5-(9.0)-10.0	27.0	10.2	10.7	1764	50	380AA	D	B	71	12.64	768
275/40ZR19	105W	XL	9.0-(9.5)-11.0	27.7	10.9	10.7	2039	50	380AA	D	B	70	12.87	751

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
245/45ZR19	102W	XL	7.5-(8.0)-9.0	27.7	9.6	10.3	1874	50	380AA	D	B	69	12.87	751
255/50R19	107W	XL	7.0-(8.0)-9.0	29.1	10.4	10.3	2149	50	380AA	D	B	70	13.43	714
225/55R19	103W	XL	6.0-(7.0)-8.0	28.8	9.2	10.1	1929	50	380AA	D	B	70	13.31	722
235/55R19	105W	XL	6.5-(7.5)-8.5	29.2	9.6	10.3	2039	50	380AA	D	B	70	13.46	712
245/55R19	107W	XL	7.0-(7.5)-8.5	29.6	10.0	10.3	2149	50	380AA	D	B	70	13.66	701
225/30ZR20	85W	XL	(8.0)	25.4	9.1	10.1	1135	50	380AA	D	B	70	12.09	819
275/30ZR20	97Y	XL	(9.5)	26.5	10.9	10.7	1609	50	380AA	D	B	71	12.56	783
245/35ZR20	95W	XL	8.0-(8.5)-9.5	26.8	9.8	10.3	1521	50	380AA	D	B	69	12.64	776
255/35ZR20	97W	XL	8.5-(9.0)-10.0	27.0	10.2	10.7	1609	50	380AA	D	B	70	12.72	769
295/40ZR21	111W	XL	10.0-(10.5)-11.5	30.3	11.9	10.7	2403	50	380AA	D	B	74	14.13	686
275/45ZR21	110W	XL	8.5-(9.0)-10.5	30.7	10.7	10.7	2337	50	380AA	D	B	71	14.29	676

CF720



UHP M+S



Features and Benefits



1. Flowing uni-directional tread design:

On road driving considered high speed stability,off road driving,and strong traction. Given tough tread block.

2. Newly developed shoulder design:

Solve irregular wear problem and minimize noise level.

3. 4+4 circumferential grooves:

For excellent water drainage in wet condition.

4. Silica tread compoun:

for better grip performance on both dry and wet surface.

Rim Diameter:

22-28 inch

Aspect Ratio:

45s-25s

Speed Rating:

W/Y

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL. (PSI)	UTQG	STATIC LOADED RADIUS(IN.)	REVS PER MILE
295/25ZR22	97Y	XL	10.0-(10.5)-11.0	27.8	11.9	10.7	1609	50	420AA	13.27	746
245/30ZR22	92W	XL	8.0-(8.5)-9.0	27.8	9.8	10.7	1389	50	420AA	13.27	746
295/30ZR22	103Y	XL	(10.5)	29.0	11.9	10.7	1929	50	420AA	13.74	716
245/35ZR22	97W	XL	8.0-(8.5)-9.5	28.8	9.8	10.7	1609	50	420AA	13.66	722
265/35ZR22	102W	XL	9.0-(9.5)-10.5	29.3	10.7	10.7	1874	50	420AA	13.86	708
245/40ZR22	101W	XL	8.0-(8.5)-9.5	29.7	9.8	10.7	1819	50	420AA	14.02	699
305/40ZR22	114W	XL	10.0-(11.0)-12.0	31.6	12.3	10.7	2601	50	420AA	14.76	657
305/45ZR22	118W	XL	9.5-(10.0)-11.5	32.8	11.9	10.7	2910	50	420AA	15.20	633
275/25ZR24	96Y	XL	(10.0)	29.4	11.1	10.7	1565	50	420AA	14.13	705
255/30ZR24	97W	XL	8.5-(9.0)-9.5	30.1	10.2	10.7	1609	50	420AA	14.37	691
295/35ZR24	110W	XL	10.0-(10.5)-11.5	32.1	11.9	10.7	2337	50	420AA	15.16	647
305/35ZR24	112W	XL	10.0-(11.0)-12.0	32.4	12.3	10.7	2469	50	420AA	15.28	640
275/25ZR26	98W	XL	(10.0)-11.0	31.4	11.1	10.7	1653	50	420AA	15.12	661
295/30ZR26	107W	XL	(10.5)	33.0	11.9	10.7	2149	50	420AA	15.71	630
305/30ZR26	109W	XL	10.5-(11.0)-11.5	33.2	12.3	10.7	2271	50	420AA	15.83	625
295/25ZR28	103Y	XL	10.0-(10.5)-11.0	33.8	11.9	10.7	1929	50	420AA	16.26	614
305/25ZR28	105Y	XL	10.5-(11.0)-11.5	34.0	12.2	10.7	2039	50	420AA	16.34	611
325/30ZR28	115Y	XL	(11.5)	35.7	13.0	10.7	2679	50	420AA	17.01	582



Comforser Tires

Driving Comfort



UHP M+S



Features and Benefits



1. Asymmetric Tread Design:

Inside for good water drainage. Outside for good riding stability and precise handling.

2. Various sipes:

On the tread and variable pitch on the shoulder blocks minimize noise level.

3. 4 circumferential straight grooves:

For excellent water drainage and minimizes risk of aquaplaning at high speed.

4. Silica tread compound:

for lower rolling resistance and excellent road holdin.

Rim Diameter:

17-20 inch

Aspect Ratio:

45s-30s

Speed Rating:

W

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL (PSI)	UTQG	FE	WG	ERNV(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
195/40ZR17	81W	XL	6.5-(7.0)-7.5	23.15	7.87	10.1	462	51	380AA	D	D	70	10.91	897
205/40ZR17	84W	XL	7.0-(7.5)-8.0	23.46	8.35	10.7	500	51	380AA	D	D	70	11.02	885
215/40ZR17	87W	XL	7.0-(7.5)-8.5	23.78	8.58	10.7	545	51	380AA	D	D	70	11.34	874
245/40ZR17	95W	XL	8.0-(8.5)-9.5	24.72	9.76	10.7	690	51	380AA	D	D	71	11.14	840
205/45ZR17	88W	XL	6.5-(7.0)-7.5	24.25	8.11	10.3	560	51	380AA	D	D	70	11.50	857
215/45ZR17	91W	XL	(7.0)-8.0	24.65	8.39	10.3	615	51	380AA	D	D	70	11.61	843
225/45ZR17	94W	XL	7.0-(7.5)-8.5	24.96	8.86	10.7	670	51	380AA	D	D	70	11.77	832
235/45ZR17	97W	XL	7.5-(8.0)-9.0	25.35	9.29	10.7	730	51	380AA	D	D	70	11.50	819
215/35ZR18	84W	XL	7.0-(7.5)-8.5	23.90	8.58	10.7	500	51	380AA	D	D	70	11.30	869
225/40ZR18	92W	XL	7.5-(8.0)-9.0	25.08	9.06	10.7	630	51	380AA	D	D	70	11.77	828
235/40ZR18	95W	XL	8.0-(8.5)-9.5	25.39	9.49	10.7	690	51	380AA	D	D	70	11.89	818
245/45ZR18	100W	XL	7.5-(8.0)-9.0	26.65	9.57	10.7	800	51	380AA	D	C	71	12.36	779
235/35ZR19	91W	XL	8.0-(8.5)-9.5	25.47	9.49	10.7	615	51	380AA	D	C	70	12.01	816
255/40ZR19	100W	XL	8.5-(9.0)-10.0	27.05	10.24	10.7	800	51	380AA	D	C	71	12.87	768
275/40ZR19	105W	XL	9.0-(9.5)-11.0	27.68	10.94	10.7	925	51	380AA	D	C	71	12.64	751
245/45ZR19	102W	XL	7.5-(8.0)-9.0	27.68	9.57	10.7	850	51	380AA	D	C	71	12.87	751
225/30ZR20	85W	XL	8	25.35	9.06	10.7	515	51	380AA	D	C	70	12.09	819
225/35ZR20	90W	XL	7.5-(8.0)-9.0	26.22	9.06	10.7	600	51	380AA	D	C	70	12.44	792
245/35ZR20	95W	XL	8.0-(8.5)-9.5	26.77	9.76	10.7	690	51	380AA	D	C	71	12.64	776
275/35ZR20	102W	XL	9.0-(9.5)-11.0	27.56	10.94	10.7	850	51	380AA	D	C	71	12.99	754
245/40ZR20	99W	XL	8.0-(8.5)-9.5	27.72	9.76	10.7	775	51	380AA	D	C	71	12.95	749






Commercial VAN



Features and Benefits

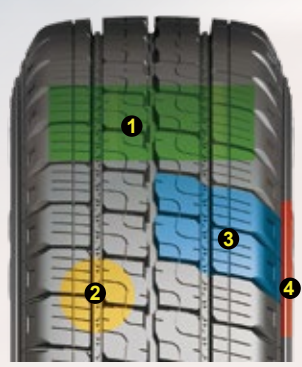

- 1. Wider tread:**
for more mileage and stable handling.
- 2. Stone ejectors:**
in main shoulder grooves for minimizing casing damage.
- 3. Sipes:**
on the center ribs and shoulder ribs provide excellent gripping on both dry and wet road conditions.
- 4. Shoulder protectorst:**
Protect tire sidewall in rough road conditions.

Rim Diameter:

14-16 inch

Aspect Ratio:

75s-65s

Speed Rating:

Q/R/T

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUAL MAX LOAD(LBS)	MAX INFL. (PSI)	SIDE WALL	FE	WG	ERNC (dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
205/75R14C	109/107R	D	(5.5)-6.5	26.1	8.0	13.0	2270	2150	69	WSW	D	C	72	11.85	800
185R14C	102/100Q	D	5.0-(5.5)-6.0	25.7	7.4	11.1	1875	1765	65	BSW	C	C	72	11.65	815
185R14C	102/100Q	D	5.0-(5.5)-6.0	25.7	7.4	11.1	1875	1765	65	WSW	C	C	72	11.65	815
195R14C	106/104Q	D	5.0-(5.5)-6.0	26.3	7.7	11.1	2095	1985	65	BSW	C	C	72	11.93	795
195R14C	106/104Q	D	5.0-(5.5)-6.0	26.3	7.7	11.1	2095	1985	65	WSW	C	C	72	11.93	795
205R14C	107/105R	D	5.5-(6.0)-6.5	26.9	8.2	13.6	2150	2040	65	BSW	D	C	72	12.17	776
195/70R15C	104/102R	D	5.0-(6.0)-6.5	25.8	7.9	11.1	1985	1875	65	BSW	C	C	72	11.81	811
205/70R15C	106/104R	D	5.5-(6.0)-6.5	26.3	8.2	11.1	2095	1985	65	WSW	D	C	72	12.05	794
215/70R15C	109/107R	D	5.5-(6.5)-7.0	26.9	8.7	11.1	2270	2150	65	BSW	D	C	72	12.24	778
225/70R15C	112/110R	D	6.0-(6.5)-7.0	27.4	9.0	11.1	2470	2335	65	BSW	D	C	72	12.48	762
205/75R15C	110/108R	D	(5.5)-6.5	27.1	8.0	13.0	2335	2205	69	WSW	D	C	72	12.36	771
195R15C	106/104R	D	5.0-(5.5)-6.0	27.3	7.7	11.1	2095	1985	65	BSW	C	C	72	12.40	766
195R15C	106/104R	D	5.0-(5.5)-6.0	27.3	7.7	11.1	2095	1985	65	WSW	C	C	72	12.40	766
195/65R16C	104/102R	D	5.5-(6.0)-6.5	26.0	7.9	13.0	1985	1875	69	BSW	C	C	72	12.01	805
205/65R16C	107/105T	D	5.5-(6.0)-6.5	26.5	8.2	13.0	2150	2040	69	BSW	D	C	72	12.17	790
215/65R16C	109/107T	D	6.0-(6.5)-7.0	27.0	8.7	13.0	2270	2150	69	BSW	D	C	72	12.40	774
225/65R16C	112/110T	D	6.0-(6.5)-7.0	27.5	9.0	13.0	2470	2335	69	BSW	D	C	72	12.60	761
235/65R16C	115/113T	D	6.5-(7.0)-7.5	28.0	9.4	13.0	2680	2535	69	BSW	D	C	72	12.80	746
185/75R16C	104/102R	D	(5.0)-6.0	26.9	7.2	11.7	1985	1875	69	BSW	C	C	72	12.36	776
195/75R16C	107/105R	D	5.0-(5.5)-6.0	27.5	7.7	11.1	2150	2040	69	BSW	C	C	72	12.60	761
205/75R16C	110/108R	D	(5.5)-6.5	28.1	8.0	13.0	2335	2205	69	BSW	D	C	72	12.83	744
225/75R16C	121/120R	E	(6.0)-7.0	29.3	8.8	11.1	3195	3085	83	BSW	D	C	72	13.31	714






Commercial VAN M+S



Features and Benefits

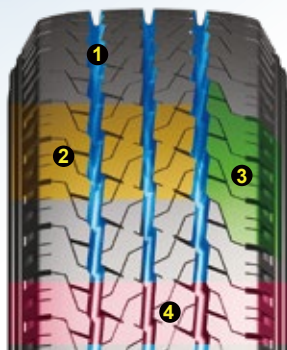

- 1. 3 zigzag longitudinal grooves:**
for excellent water evacuation and improve tire flexibility.
- 2. Special structure design:**
greatly improves the loading capacity.
- 3. Intensive sipes are designed:**
to minimize the noise level, and enhance heat dispersion performance, which will greatly ensure the driving safety.
- 4. Deeper and wider tread design:**
for excellent riding stability, which ensures the safety and high mileage.

Rim Diameter:
13-17 inch

Aspect Ratio:
85s-60s

Speed Rating:
Q/R/S/T

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUAL MAX LOAD(LBS)	MAX INFL. (PSI)	FE	WG	ERNC(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
185/85R16	97S	SL	4.5-(5.0)-6.0	28.3	7.2	13.2	1609	-	44	-	-	-	12.80	733
165/70R13C	88/86S	C	4.5-(5.0)	22.1	6.7	10.7	1235	1168	54	D	C	72	10.16	945
155R13C	90/88S	D	4.0-(4.5)-5.0	22.8	6.2	10.7	1323	1235	65	D	C	72	10.39	919
165R13C	94/93S	D	4.0-(4.5)-5.0	23.5	6.6	10.7	1480	1435	65	D	C	72	10.67	891
175R13C	97/95S	D	4.5-(5.0)-5.5	24.0	7.0	10.7	1610	1520	65	D	C	72	10.91	871
175/65R14C	90/88T	C	(5.0)-5.5	23.0	7.0	10.7	1323	1235	54	D	C	72	10.59	909
165/70R14C	84/80S	C	4.5-(5.0)-5.5	23.1	6.7	10.7	1102	992	51	D	C	72	10.67	903
175/70R14C	98/96S	D	4.5-(5.0)-5.5	23.7	7.0	10.7	1655	1565	65	D	C	72	10.87	882
185/70R14C	102/100S	D	5.0-(5.5)-6.0	24.3	7.4	10.7	1875	1765	65	D	C	72	11.10	862
LT175/75R14	94/91S	D	4.5-(5.0)-6.0	24.3	7.0	11.3	1475	1355	65	D	C	72	11.14	859
205/75R14C	109/107R	D	(5.5)-6.5	26.1	8.0	12.0	2270	2150	69	D	C	72	11.85	800
165R14C	96/95S	D	4.0-(4.5)-5.0	24.5	6.6	10.7	1565	1521	65	D	C	72	11.18	854
185R14C	102/100Q	D	5.0-(5.5)-6.0	25.6	7.4	11.1	1875	1765	65	D	C	72	11.65	817
195R14C	106/104Q	D	5.0-(5.5)-6.0	26.2	7.8	11.1	2095	1985	65	D	C	72	11.89	797
205/65R15C	102/100T	C	5.5-(6.0)-6.5	25.5	8.2	11.3	1875	1765	54	D	C	72	11.69	821
215/65R15C	104/102T	C	6.0-(6.5)-7.0	26.0	8.7	11.1	1985	1875	54	D	C	72	11.93	804
195/70R15C	104/102R	D	5.0-(6.0)-6.5	25.8	7.9	11.1	1985	1875	69	D	C	72	11.81	811
205/75R15C	110/108R	D	(5.5)-6.5	27.1	8.0	12.0	2335	2205	69	D	C	72	12.36	771
LT195/85R15	113/111L	F	5.0-(5.5)-6.0	28.0	7.7	11.1	2535	2405	94	-	-	-	12.72	746
195R15C	106/104R	D	5.0-(5.5)-6.0	27.2	7.8	11.1	2095	1985	65	D	C	72	12.36	770
215/60R16C	108/106T	D	6.0-(6.5)-7.0	26.1	8.7	11.3	2205	2095	69	D	C	72	12.05	800
195/65R16C	104/102R	D	5.5-(6.0)-6.5	26.0	7.9	11.1	1985	1875	69	D	C	72	12.01	805
235/65R16C	115/113R	D	6.5-(7.0)-7.5	28.0	9.4	11.1	2680	2535	69	D	C	72	12.80	746
175/75R16C	101/99R	D	4.5-(5.0)-5.5	26.3	7.0	11.3	1820	1710	69	D	C	72	12.13	795
185/75R16C	104/102R	D	(5.0)-6.0	26.9	7.2	11.1	1985	1875	69	D	C	72	12.36	776
215/75R16C	116/114S	E	5.5-(6.0)-7.0	28.7	8.5	11.3	2755	2600	76	D	C	72	13.07	730
225/75R16C	118/116Q	E	5.5-(6.0)-6.5	29.3	8.8	11.0	2910	2755	76	D	C	72	13.19	709
LT185/85R16	111/109L	F	4.5-(5.0)-6.0	28.3	7.2	13.2	2405	2270	94	D	C	72	12.95	738
LT195/85R16	114/112L	F	5.0-(5.5)-6.0	29.1	7.7	11.1	2600	2470	94	D	C	72	13.23	720
LT205/85R16	117/115L	F	5.0-(5.5)-6.5	29.7	8.0	11.1	2835	2680	94	D	C	72	13.46	704
215/60R17C	109/107T	D	6.0-(6.5)-7.0	27.2	8.7	11.3	2270	2150	69	D	C	72	12.56	770
235/60R17C	117/115T	E	6.5-(7.0)-7.5	28.1	9.4	11.3	2835	2680	76	D	C	72	12.95	744




CF930



Winter HP

M+S

Features and Benefits

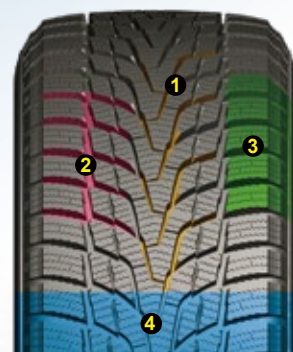

1. Special Y-style directional pattern design:

Will be excellent to improve the handing stability in ice-snow road condition.

2. Open grooves :

For effective water evacuation, greatly reduce the hydroplaning, and ensure the safety on ice-snow road.

3. High density 3D sipes on the tread pattern:

Ensure the general rigidity of the tread, improve the adhesive power between wheel and the ice-snow ground, and strengthen the holding ability.

4. Advanced silica compound :

Enhances the traction and balance in winter driving conditions.

Rim Diameter:

13-17 inch

Aspect Ratio:

70s-50s

Speed Rating:

T/H

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD. RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	FE	WG	ERNc(dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
165/70R13	79T	SL	4.0-(5.0)-5.5	22.1	6.7	10.3	963	44	E	C	71	10.04	939
185/60R14	82T	SL	5.0-(5.5)-6.5	22.8	7.4	10.7	1047	44	E	C	71	10.43	913
175/65R14	82T	SL	(5.0)-6.0	23.0	7.0	10.6	1047	44	E	C	71	10.51	903
185/65R14	86T	SL	5.0-(5.5)-6.5	23.5	7.4	10.7	1168	44	E	C	71	10.71	885
165/70R14	81T	SL	4.0-(5.0)-5.5	23.1	6.7	10.3	1019	44	E	C	71	10.55	897
175/70R14	88T	XL	4.5-(5.0)-6.0	23.7	7.0	10.6	1235	50	E	C	71	10.79	876
185/70R14	88T	SL	4.5-(5.5)-6.0	24.3	7.4	10.7	1235	44	E	C	71	10.98	857
195/50R15	82H	SL	5.5-(6.0)-7.0	22.7	7.9	11.0	1047	44	E	C	72	10.51	914
195/55R15	85H	SL	5.5-(6.0)-7.0	23.4	7.9	11.0	1135	44	E	C	72	10.79	887
185/60R15	88H	XL	5.0-(5.5)-6.5	23.7	7.4	10.7	1235	50	E	C	71	10.91	875
195/60R15	88H	SL	5.5-(6.0)-7.0	24.2	7.9	11.0	1235	44	E	C	72	11.10	858
175/65R15	84T	SL	(5.0)-6.0	24.0	7.0	10.6	1102	44	E	C	71	10.98	866
185/65R15	88T	SL	5.0-(5.5)-6.5	24.4	7.4	10.7	1235	44	E	C	71	11.18	850
195/65R15	91T	SL	5.5-(6.0)-7.0	25.0	7.9	11.0	1356	44	E	C	72	11.42	831
205/65R15	94T	SL	5.5-(6.0)-7.5	25.5	8.2	11.0	1477	44	E	C	72	11.57	816
195/55R16	91H	XL	5.5-(6.0)-7.0	24.4	7.9	11.0	1356	50	E	C	72	11.26	851
205/55R16	91T	SL	5.5-(6.5)-7.5	24.9	8.4	11.0	1356	44	E	C	72	11.46	835
215/55R16	97H	XL	6.0-(7.0)-7.5	25.3	8.9	11.0	1609	50	E	C	72	11.61	822
225/55R16	99H	XL	6.0-(7.0)-8.0	25.7	9.2	11.0	1709	50	E	C	72	11.81	807
205/60R16	96H	XL	5.5-(6.0)-7.5	25.7	8.2	11.0	1565	50	E	C	72	11.77	809
215/60R16	99H	XL	6.0-(6.5)-7.5	26.1	8.7	11.0	1709	50	E	C	72	11.97	795
205/50R17	93H	XL	5.5-(6.5)-7.5	25.1	8.4	11.0	1433	50	E	C	72	11.65	827
225/50R17	98H	XL	6.0-(7.0)-8.0	25.9	9.2	11.0	1653	50	E	C	72	11.97	802
215/55R17	98H	XL	6.0-(7.0)-7.5	26.3	8.9	11.0	1653	50	E	C	72	12.13	790
225/55R17	101H	XL	6.0-(7.0)-8.0	26.8	9.2	11.0	1819	50	E	C	72	12.32	776

Comforser Tires

Driving Comfort

CF960



Winter SUV/UHP M+S



Features and Benefits



- 1. Asymmetric tread design:**
Provides balanced performance for different driving conditions.
- 2. Well-designed footprint:**
for excellent handling ability in both ice-snow and dry-wet road conditions.
- 3. High density 3D sipes:**
ensure the general rigidity of the general rigidity of the tread, improve the adhesive power between wheel and the ice-snow ground, and strengthen the holding ability.
- 4. Advanced silica compound:**
keeps rubber flexible for maximum performance in extreme cold temperatures in winter.

Rim Diameter:

15-22 inch

Aspect Ratio:

75s-35s

Speed Rating:

H/T/V

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL. (PSI)	FE	WG	ERN(C)(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
215/75R15	100T	SL	5.5-(6.0)-7.0	27.7	8.5	14.5	1764	44	D	E	71	12.44	751
235/70R16	106T	SL	6.0-(7.0)-8.0	29.0	10.6	12.0	2094	44	D	E	71	13.07	717
235/45R17	97V	XL	7.5-(8.0)-9.0	25.4	9.3	12.0	1609	50	D	E	71	11.77	819
215/50R17	91H	SL	6.0-(7.0)-7.5	25.5	8.9	12.0	1356	44	D	E	71	11.81	814
235/55R17	103H	XL	6.5-(7.5)-8.5	27.2	9.6	14.5	1929	50	D	E	71	12.48	765
285/70R17	117T	SL	7.5-(8.5)-9.5	32.8	11.5	14.5	2833	44	D	E	74	14.65	634
245/75R17	112T	SL	6.5-(7.0)-8.0	31.5	9.8	14.5	2469	44	D	E	71	14.17	660
255/40R18	99V	XL	8.5-(9.0)-10.0	26.0	10.2	12.0	1709	50	D	E	72	12.13	798
225/45R18	95H	XL	7.0-(7.5)-8.5	25.9	8.9	12.0	1521	50	D	E	71	12.09	801
255/45R18	103V	XL	8.0-(8.5)-9.5	27.0	10.0	12.0	1929	50	D	E	72	12.52	768
275/45R18	107V	XL	8.5-(9.0)-10.5	27.8	10.7	12.0	2149	50	D	E	72	12.80	748
235/50R18	101V	XL	6.5-(7.5)-8.5	27.3	9.6	14.5	1819	50	D	E	71	12.64	761
245/50R18	104V	XL	7.0-(7.5)-8.5	27.7	10.0	12.0	1984	50	D	E	71	12.76	751
215/55R18	99H	XL	6.0-(7.0)-7.5	27.3	8.9	14.5	1709	50	D	E	71	12.64	761
235/55R18	104H	XL	6.5-(7.5)-8.5	28.1	9.6	14.5	1984	50	D	E	71	12.95	738
265/60R18	110T	SL	7.5-(8.0)-9.5	30.5	10.7	14.5	2337	44	D	E	72	13.90	681
285/60R18	116T	SL	(8.5)-10.0	31.5	11.8	14.5	2756	44	D	E	74	14.25	660
235/65R18	106T	SL	6.5-(7.0)-8.5	30.0	9.4	14.5	2094	44	D	E	71	13.70	692
275/40R19	105V	XL	9.0-(9.5)-11.0	27.7	10.9	12.0	2039	50	D	E	72	12.87	751
225/45R19	96H	XL	7.0-(7.5)-8.5	27.0	8.9	12.0	1565	50	D	E	71	12.60	770
245/45R19	102V	XL	7.5-(8.0)-9.0	27.7	9.6	12.0	1874	50	D	E	71	12.87	751
255/45R19	104V	XL	8.0-(8.5)-9.5	28.1	10.0	14.5	1984	50	D	E	72	13.03	740
235/50R19	103V	XL	6.5-(7.5)-8.5	28.3	9.6	14.5	1929	50	D	E	71	13.15	734
245/55R19	107H	XL	7.0-(7.5)-8.5	29.6	10.0	14.5	2149	50	D	E	71	13.66	701
275/55R19	111H	SL	7.5-(8.5)-9.5	30.9	11.2	14.5	2403	44	D	E	72	14.13	672
275/35R20	102V	XL	9.0-(9.5)-11.0	27.6	10.9	12.0	1874	50	D	E	72	12.95	754
315/35R20	110V	XL	10.5-(11.0)-12.5	28.7	12.6	14.5	2337	50	D	E	74	13.39	725
245/40R20	99V	XL	8.0-(8.5)-9.5	27.7	9.8	12.0	1709	50	D	E	71	12.99	749
275/40R20	106V	XL	9.0-(9.5)-11.0	28.7	10.9	14.5	2094	50	D	E	72	13.39	725
245/45R20	103V	XL	7.5-(8.0)-9.0	28.7	9.6	14.5	1929	50	D	E	71	13.39	725
275/45R20	110V	XL	8.5-(9.0)-10.5	29.6	10.7	14.5	2337	50	D	E	72	13.78	701
245/50R20	105V	XL	7.0-(7.5)-8.5	29.7	10.0	14.5	2039	50	D	E	71	13.78	700
285/50R20	116V	XL	8.5-(9.0)-9.5	31.3	11.7	14.5	2756	50	D	E	74	14.41	665
275/45R21	110V	XL	8.5-(9.0)-10.5	30.7	10.7	14.5	2337	50	D	E	72	14.29	676
275/50R21	113V	XL	7.5-(8.5)-9.5	31.9	11.2	14.5	2535	50	D	E	72	14.72	652
275/40R22	107V	XL	9.0-(9.5)-11.0	30.7	10.9	14.5	2149	50	D	E	72	14.37	677

Comforser Tires

Driving Comfort

CF950**Winter SUV****M+S**

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	MAX INFL. (PSI)	FE	WG	ERNC(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
215/65R16	98H	SL	6.0-(6.5)-7.5	27.0	8.7	11.0	1653	44	B	D	72	12.28	769
215/70R16	100T	SL	5.5-(6.5)-7.0	27.9	8.7	11.0	1764	44	B	D	72	12.64	745
245/70R16	111T	XL	6.5-(7.0)-8.0	29.5	9.8	11.6	2403	50	B	D	72	13.27	704
225/45R17	94H	XL	7.0-(7.5)-8.5	25.0	8.9	11.3	1477	50	B	D	72	11.61	832
215/60R17	96H	SL	6.0-(6.5)-7.5	27.2	8.7	11.0	1565	44	B	D	72	12.48	765
225/60R17	99H	SL	6.0-(6.5)-8.0	27.9	9.0	11.3	1709	44	B	D	72	12.76	745
235/60R17	102H	SL	6.5-(7.0)-8.5	28.1	9.4	11.6	1874	44	B	D	72	12.83	739
225/65R17	106H	XL	6.0-(6.5)-8.0	28.5	9.0	11.0	2094	50	B	D	72	12.99	729
235/65R17	108H	XL	6.5-(7.0)-8.5	29.1	9.4	12.0	2205	50	B	D	72	13.19	715
265/65R17	112T	SL	7.5-(8.0)-9.5	30.6	10.7	11.6	2469	44	B	D	73	13.78	680
225/40R18	92V	XL	7.5-(8.0)-9.0	25.1	9.1	11.3	1389	50	B	D	72	11.77	828
245/45R18	100V	XL	7.5-(8.0)-9.0	26.7	9.6	11.6	1764	50	B	D	72	12.36	779
255/55R18	109H	XL	7.0-(8.0)-9.0	29.0	10.4	11.6	2271	50	B	D	73	13.31	716
235/60R18	107H	XL	6.5-(7.0)-8.5	29.1	9.4	11.6	2149	50	B	D	72	13.31	714
255/50R19	107V	XL	7.0-(8.0)-9.0	29.1	10.4	11.6	2149	50	B	D	72	13.43	714

Comforser Tires**Driving Comfort**

CF970

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUAL MAX LOAD(LBS)	MAX INFL. (PSI)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
195/65R15	91T	SL	5.5-(6.0)-7.0	25.0	7.9	12.9	1356	-	44	11.42	831
185/75R16C	104/102R	D	(5.0)-6.0	26.9	7.2	13.2	1985	1875	69	12.36	776

Winter Studdable

**Comforser** Tires**Driving Comfort**

CF360

Winter Commercial/VAN




TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLE MAX LOAD(LBS)	DUAL MAX LOAD(LBS)	MAX INFL (PSI)	FE	WG	ERNC(dB)	STATIC LOADED RADIUS(IN.)	REVS PER MILE
215/75R14C	112/110R	D	5.5-(6.0)-7.0	26.7	8.5	12.6	2470	2335	69	C	D	71	12.09	783
185R14C	102/100R	D	5.0-(5.5)-6.0	25.7	7.4	12.6	1875	1765	65	C	D	71	11.65	815
195/70R15C	104/102R	D	5.0-(6.0)-6.5	25.8	7.9	12.0	1985	1875	65	C	D	71	11.81	811
215/70R15C	109/107R	D	5.5-(6.5)-7.0	26.9	8.7	12.0	2270	2150	65	C	D	71	12.24	778
225/70R15C	112/110R	D	6.0-(6.5)-7.0	27.4	9.0	12.0	2470	2335	65	C	D	71	12.48	762
195/65R16C	104/102R	D	5.5-(6.0)-6.5	26.0	7.9	12.0	1985	1875	69	C	D	71	12.01	805
205/65R16C	107/105R	D	5.5-(6.0)-6.5	26.5	8.2	12.0	2150	2040	69	C	D	71	12.17	790
215/65R16C	109/107R	D	6.0-(6.5)-7.0	27.0	8.7	12.0	2270	2150	69	C	D	71	12.40	774
235/65R16C	115/113R	D	6.5-(7.0)-7.5	28.0	9.4	12.0	2680	2535	69	C	D	71	12.80	746
185/75R16C	104/102R	D	(5.0)-6.0	26.9	7.2	11.3	1985	1875	69	C	D	71	12.36	776
195/75R16C	107/105R	D	5.0-(5.5)-6.0	27.5	7.7	12.0	2150	2040	69	C	D	71	12.60	761

Comforser Tires**Driving Comfort**



Off-Road COMPETITION M+S

Features and Benefits

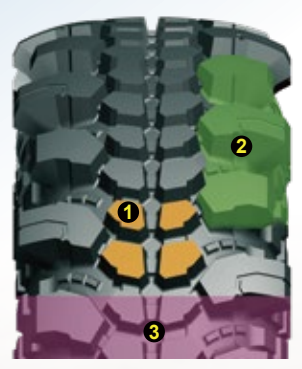

COC china off-road Championship

- 1. Anti pressure cutting resistance, durability
- 2. Widen flat pattern block with depth groove:
having stronger pressure resistance and better drainage and mud shed-ding ability.
- 3. Jig-saw tread pattern:
helps to improve tire's gripping and driving performance.

Rim Diameter:
15-16 inch

Speed Rating:
K/L/N


TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	TREAD DEPTH (1/32")	SINGLEMAX LOAD(LBS)	DUALMAX LOAD(LBS)	MAX INFL. (PSI)	SIDE WALL	POR	STATIC LOADED RADIUS(IN.)	REVS PER MILE
31x10.50-15LT	110K	C	7.0-9.0	30.7	10.6	21.4	2335	-	45	BSW	POR	13.82	680
33x10.50-15LT	115K	C	7.0-9.0	32.8	10.6	21.4	2680	-	45	BSW	POR	14.61	638
35x11.50-15LT	122K	C	8.0-10.0	34.8	11.4	21.4	3305	-	45	BSW	POR	15.39	602
31x10.50-16LT	109N	C	7.0-9.0	30.7	10.6	21.4	2270	-	45	BSW	POR	13.90	680
33x10.50-16LT	114L	C	7.0-9.0	32.8	10.6	21.4	2600	-	45	BSW	POR	14.69	638
35x10.50-16LT	119L	C	7.0-9.0	34.8	10.6	21.4	3000	-	45	BSW	POR	15.51	602
35x11.50-16LT	120K	C	8.0-10.0	34.8	11.4	21.4	3085	-	45	BSW	POR	15.51	602



Driving Comfort

SPECIFICATION TAG & MARKING METHOD

▶ TAG detail

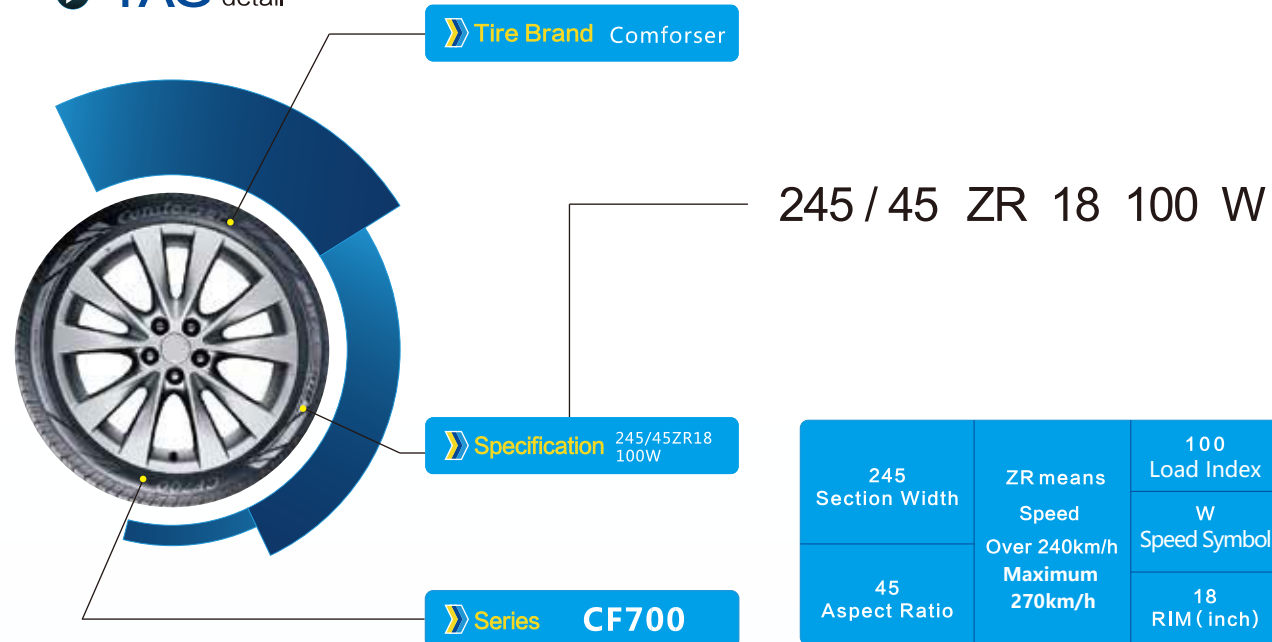

■ Speed

Speed symbol indicates the maximum travel speed that the tire can achieve under stated condition.

SS	Maximum Speed (km/h)
P	150
Q	160
S	180
T	190
H	210
V	240
W	270
Y	300
★ ZR	over 240km / h

★ ZR means a certain range of speed

- Maximum speed refers to the speed that the tire can achieve on flat road after normal installation.

■ Loading Index

Load index refers to numeral value of tire's maximum load ability under stated condition.

LI	loading capacity	LI	loading capacity	LI	loading capacity	LI	loading capacity
60	250	76	400	91	615	106	950
61	257	77	412	92	630	107	975
62	265	78	425	93	650	108	1000
63	272	79	437	94	670	109	1030
64	280	80	450	95	690	110	1060
65	290	81	462	96	710	111	1090
66	300	82	475	97	730	112	1120
67	307	83	487	98	750	113	1150
68	315	84	500	99	775	114	1180
69	325	85	513	100	800	115	1215
70	335	86	530	101	825	116	1250
71	345	87	545	102	850	117	1285
72	355	88	560	103	875	118	1320
73	365	89	580	104	900	119	1360
74	375	90	600	105	925	120	1400
75	387						

SAFE&ECO DRIVING

▶ Safety Driving

Please obey the traffic laws and regulations, keep cautious and respect the other drivers and pedestrians.

▶ Eco Driving

The idea of "Green and Environment" is always recommended, and the advice below will save maintenance costs, extend service life of tire and save fuel.

TIRE USAGE

▶ Tire Maintenance

For the sake of safety, you should check the tire air-pressure regularly at least once a month. Be cautious about the damage and uneven wear, positioning, balance or suspension failure will affect overall tire performance and cause danger. Tire is the only contact part between vehicles and ground, and it should be in a good condition always.

- ▶ Check the tire pressure regularly, especially before long time driving. If tire is incorrectly inflated, it will lead to increase of rolling resistance and extra fuel consumption.

- ▶ Faster driving speed will result in greater air resistance so as to increase fuel consumption.

- ▶ Keep smooth driving will avoid abrupt acceleration and sudden braking.

- ▶ Convert to higher gear as soon as possible to prevent the engine running fast at lower gear.

- ▶ Use air conditioner properly. If you don't need it, turn off all electrical equipment, for example the electrically heated rear window.

- ▶ Get ready for starting the engine. Switch off the engine if you predict the car will park longer than a few minutes.

- ▶ Check the wheel positioning and wheel camber angle by professional tire maintenance personnel regularly, and make sure that the car running smoothly and stably, which is a important factor for fuel saving.

- ▶ If you have a spare tire check air-pressure, too.

▶ Tire Rotation

Tire rotation is a simple and effective way to prolong tire service life through balancing degree of wear.

