



2025-2026 TIRE PRODUCT SERIES

WHEREVER YOU GO, ENJOY THE DRIVING WITH ROADCRUZA.



SHANDONG NEW CONTINENT TIRE CO., LTD.

📍 Add: Lushan Industrial Zone, Yishui City, Shandong, China

🌐 Web: www.snctire.com

✉ Info@snctire.com



LIGHT TRUCK SERIES



RA3200

M/T



LT205/70R15	35x12.50R18LT
LT215/75R15	33x12.50R20LT
LT235/75R15	35x12.50R20LT
LT265/70R16	35x13.50R20LT
LT305/70R16	35x13.50R20LT
LT225/75R16	37x13.50R20LT
LT245/75R16	37x13.50R20LT
LT265/75R16	33x12.50R22LT
LT265/75R16	35x12.50R22LT
LT285/75R16	35x12.50R22LT
LT285/75R16	37x13.50R22LT
LT315/75R16	37x13.50R22LT
LT315/75R16	33x12.50R24LT
LT215/85R16	35x12.50R24LT
LT235/85R16	37x13.50R24LT
LT265/65R17	40x15.50R24LT
LT265/70R17	35x13.50R26LT
LT285/70R17	37x13.50R26LT
LT275/65R18	40x15.50R26LT
LT285/65R18	
LT275/55R20	
LT285/55R20	
31x10.50R15LT	
32x11.50R15LT	
33x12.50R15LT	
35x12.50R15LT	
33x12.50R17LT	
35x12.50R17LT	
37x12.50R17LT	
37x12.50R17LT	
33x12.50R18LT	

50 Sizes

Page:13-14



RA8000

R/T



LT265/75R16	35x13.50R17LT
LT265/75R16	37x13.50R17LT
LT285/75R16	37x13.50R17LT
LT265/65R17	39x13.50R17LT
LT265/70R17	40x13.50R17LT
LT285/70R17	40x13.50R17LT
LT245/75R17	38x15.50R17LT
LT235/80R17	38x15.50R17LT
LT235/55R18	33x12.50R18LT
LT265/60R18	35x12.50R18LT
LT285/60R18	33x12.50R20LT
LT285/60R18	35x12.50R20LT
LT265/65R18	35x12.50R20LT
LT265/65R18	37x12.50R20LT
LT275/65R18	44x14.50R20LT
LT285/65R18	33x12.50R22LT
LT285/65R18	35x12.50R22LT
LT265/70R18	33x12.50R24LT
LT265/70R18	35x12.50R24LT
LT275/70R18	
LT295/70R18	
LT285/75R18	
LT285/75R18	
LT255/60R19	
LT265/50R20	
LT275/55R20	
LT285/55R20	
LT285/55R20	
LT305/55R20	
35x12.50R17LT	
37x12.50R17LT	

50 Sizes

Page:15-16

SUV/CUV/VAN/LIGHT TRUCK SERIES



RA7000

X/T



175/80R14	LT215/75R15
205/60R15	LT235/75R15
205/65R15	LT265/70R16
205/70R15	LT225/75R16
215/75R15	LT245/75R16
235/75R15	LT265/75R16
205/60R16	LT285/75R16
215/65R16	LT235/85R16
215/70R16	LT265/65R17
225/70R16	LT245/70R17
235/70R16	LT265/70R17
255/70R16	LT285/70R17
275/70R16	LT315/70R17
225/65R17	LT265/65R18
235/65R17	LT275/65R18
245/65R17	LT285/65R18
235/60R18	LT265/70R18
285/60R18	LT275/70R18
255/55R19	LT285/50R20
265/50R20	LT275/55R20
275/60R20	31x10.50R15L
195R15C	
LT215/70R16	
LT225/70R16	
LT235/70R16	
LT245/70R16	
LT255/60R18	
LT265/60R18	
LT205/70R15	

50 Sizes

Page:17-18



SUV/CUV/VAN/LIGHT TRUCK SERIES



RA1100

A/T



175/75R13	P265/70R17	245/75R15C	LT285/75R16	LT235/65R18	LT265/45R21
185/70R14	235/50R18	215/65R16C	LT315/75R16	LT265/65R18	LT275/45R21
175/75R14	235/50R18	225/65R16C	LT215/85R16	LT275/65R18	LT275/50R21
175/80R14	215/55R18	235/65R16C	LT235/85R16	LT285/65R18	LT285/45R22
205/60R15	P235/55R18	195/75R16C	LT215/60R17	LT255/70R18	LT275/50R22
205/65R15	255/55R18	205/75R16C	LT225/60R17	LT265/70R18	31x10.50R15LT
205/70R15	P225/60R18	215/75R16C	LT225/65R17	LT275/70R18	33x12.50R15LT
235/70R15	235/60R18	255/45R18C	LT235/65R17	LT285/70R18	35x12.50R15LT
215/75R15	245/60R18	195R15C	LT245/65R17	LT255/50R19	33x12.50R17LT
P235/75R15	265/60R18	185R14LT	LT255/65R17	LT235/55R19	35x12.50R17LT
195/80R15	285/60R18	LT175/70R14	LT265/65R17	LT245/55R19	37x13.50R17LT
205/55R16	235/65R18	LT185/70R14	LT275/65R17	LT255/55R19	33x12.50R18LT
205/60R16	265/70R18	LT175/80R14	LT285/65R17	LT265/55R19	35x12.50R18LT
215/65R16	235/50R19	LT205/60R15	LT245/70R17	LT275/55R19	33x12.50R20LT
P215/70R16	225/55R19	LT205/65R15	LT265/70R17	LT235/65R19	35x12.50R20LT
P225/70R16	245/55R19	LT205/70R15	LT275/70R17	LT245/50R20	33x12.50R22LT
P235/70R16	255/55R19	LT215/75R15	LT285/70R17	LT265/50R20	35x12.50R22LT
P245/70R16	265/55R19	LT235/75R15	LT305/70R17	LT285/50R20	33x12.50R24LT
P255/70R16	P235/60R19	LT205/55R16	LT315/70R17	LT255/55R20	35x12.50R24LT
P265/70R16	255/60R19	LT205/60R16	LT245/75R17	LT265/55R20	★ 265/65R18
P275/70R16	275/45R20	LT215/70R16	LT255/75R17	LT275/55R20	
P215/60R17	255/50R20	LT225/70R16	LT235/80R17	LT285/55R20	
225/60R17	265/50R20	LT235/70R16	LT225/60R18	LT305/55R20	
235/60R17	275/50R20	LT245/70R16	LT235/60R18	LT255/60R20	
225/65R17	265/60R20	LT255/70R16	LT245/60R18	LT275/60R20	
235/65R17	P275/60R20	LT265/70R16	LT255/60R18	LT285/60R20	
P245/65R17	275/40R22	LT225/75R16	LT255/65R18	LT295/60R20	
255/65R17	295/40R22	LT245/75R16	LT265/60R18	LT305/60R20	
P265/65R17	285/40R24	LT265/75R16	LT285/60R18	LT275/65R20	

165 Sizes ★ being developed

Page:19-22

LIGHT TRUCK SERIES



SNOW LYNX

A/T (STUDDABLE)



LT265/70R16	LT265/55R19
LT265/65R17	LT275/55R19
LT285/65R17	LT255/60R19
LT265/70R17	LT275/45R20
LT275/70R17	LT255/50R20
LT285/70R17	LT265/50R20
LT315/70R17	LT255/55R20
LT265/60R18	LT275/55R20
LT285/60R18	LT285/55R20
LT255/65R18	LT275/60R20
LT265/65R18	LT275/65R20
LT275/65R18	LT265/45R21
LT285/65R18	LT285/45R21
LT325/65R18	LT275/50R21
LT265/70R18	LT285/45R22
LT275/70R18	LT275/50R22
	37x12.50R17LT
	33x12.50R20LT
	35x12.50R20LT

35 Sizes

Page:23-24

EV READY SERIES



RA4100

SUV/CUV



235/75R15
215/65R16
215/70R16
225/70R16
235/70R16
245/70R16
255/70R16
265/70R16
235/60R17
245/65R17
265/65R17
245/70R17
265/70R17
LT235/75R15
LT225/75R16
LT245/75R16
LT265/75R16
LT215/85R16
LT235/85R16
LT265/70R17
LT245/75R17
31x10.50R15LT

245/50ZR18
225/55ZR18
255/55ZR18
225/60R18
245/60R18
255/55ZR19
245/40ZR20
275/40R20
275/45ZR20
265/50ZR20
285/50ZR20
275/55ZR20
295/35ZR21

22 Sizes

Page:25-26

13 Sizes

Page:27-28



RA760

RA630

UHP Silent TECH

HP



195/55R15	225/50ZR17	225/60R18	255/45ZR20
195/60R15	205/55ZR17	235/60R18	265/45ZR20
185/65R15	215/55ZR17	265/60R18	275/45R20
195/65R15	215/55ZR17	235/40ZR19	235/50R20
205/65R15	225/55ZR17	225/45ZR19	255/50R20
205/70R15	235/55ZR17	235/50ZR19	245/35ZR21
195/45R16	215/60R17	225/35ZR19	265/35ZR21
215/45ZR16	225/60R17	255/35ZR19	265/45ZR21
185/55R16	215/65R17	225/40ZR19	265/40R22
195/55R16	225/65R17	245/40ZR19	
205/55ZR16	235/65R17	255/40ZR19	
215/55ZR16	265/65R17	235/45ZR19	
195/60R16	195/35ZR18	245/45ZR19	
205/60R16	245/45ZR18	255/45ZR19	
215/60R16	235/50R18	245/50R19	
225/60R16	245/50ZR18	255/50R19	
205/65R16	215/55R18	205/55R19	
215/65R16	235/65R18	225/55R19	
185/35R17	185/35R18	235/55R19	
165/40R17	205/35R18	255/55R19	
195/40R17	245/35ZR18	255/55R20	
205/40ZR17	165/40R18	215/30ZR20	
215/40ZR17	205/40R18	225/30ZR20	
255/40ZR17	225/40ZR18	235/30ZR20	
195/45ZR17	235/40ZR18	225/35ZR20	
215/45ZR17	235/45ZR18	245/40ZR20	
225/45ZR17	215/50ZR18	255/40ZR20	
235/45ZR17	225/50ZR18	305/40R20	
205/50ZR17	225/55ZR18	235/45ZR20	
215/50ZR17	235/55R18	245/45ZR20	

155/70R13
175/75R13
165/70R14
175/70R14
175/75R14
185/70R14

99 Sizes

Page:29-32

6 Sizes

Page:33-34

HP SERIES



RA720

UHP



295/25ZR22
245/30ZR22
295/30ZR22
245/35ZR22
265/35ZR22
245/40ZR22
305/40ZR22
305/45ZR22
275/25ZR24
255/30ZR24
295/35ZR24
305/35ZR24
275/25ZR26
295/30ZR26
305/30ZR26
295/25ZR28
305/25ZR28
325/30ZR28

18 Sizes

Page:37-38



SPORTS V1

HP



175/60R13	195/55R15
165/65R13	205/55R15
185/70R13	185/60R15
175/75R13	195/60R15
155/80R13	205/60R15
185/60R14	215/60R15
195/60R14	225/60R15
205/60R14	235/60R15
235/60R14	185/65R15
185/65R14	195/65R15
195/65R14	205/65R15
185/70R14	215/65R15
195/70R14	205/70R15
205/70R14	215/70R15
215/70R14	195/55R16
195/50R15	205/55R16
205/50R15	205/55R16
185/55R15	195/60R16
	205/60R16
	215/60R16
	225/60R16
	235/60R16

16 Sizes

Page:43-44

[illegible][illegible]

ALL WEATHER



215/75R14C
185R14C
195/70R15C
215/70R15C
225/70R15C
195/65R16C
205/65R16C
215/65R16C
235/65R16C
185/75R16C
195/75R16C

Page:53-54

ICE-POWERGRIP



165/70R13

215/65R16215/75R15 245/40R20

195/65R15

185/60R14
175/65R14
185/65R14
165/70R14
175/70R14
185/70R14
195/50R15
195/55R15
185/60R15
195/60R15
175/65R15
185/65R15
195/65R15
205/65R15
195/55R16
205/55R16
215/55R16
225/55R16
205/60R16
215/60R16
205/50R17
225/50R17
215/55R17
225/55R17

215/70R16
245/70R16
225/45R17
215/60R17
225/60R17
235/60R17
225/65R17
235/65R17
265/65R17
225/40R18
245/45R18
255/55R18
235/60R18
255/50R19

235/70R16	245/45R20
215/50R17	245/50R20
235/45R17	275/35R20
235/55R17	275/40R20
245/75R17	275/45R20
285/70R17	285/50R20
215/55R18	315/35R20
225/45R18	275/45R21
235/50R18	275/50R21
235/55R18	275/40R22
235/65R18	
245/50R18	
255/40R18	
255/45R18	
265/60R18	
275/45R18	
285/60R18	
225/45R19	
235/50R19	
245/45R19	
245/55R19	
255/45R19	
275/40R19	
275/55R19	

185/75R16C

Page:55-56

Page:57-58

Page:59-60

Page:61-62

RA3200 M/T

M+S



OPEN BLOCK DISTRIBUTION:

For efficient self-cleaning, especially in mud and dirt condition.

SIDEWALL DESIGN

Designed for protecting sidewall and beautiful decoration.

TREAD DESIGN

Coupled shoulder blocks and center blocks provide excellent performance on/off road condition.

DURABLE COMPOUND

Adopted special compounds for longer mileage and adding cutting resistance on unpaved roads.

PRODUCT PERFORMANCE

9.0



Rim Diameter ∨

Aspect Ratio ∨

Speed Rating ∨

15-26

85s-55s

P/Q

APPLICABLE MODELS  

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	POR	STATIC LOADED RADIUS (IN.)	REVS PER MILE
LT205/70R15	96/93Q	C	5.0-(6.0)-7.0	26.3	8.2	1565	1435	51	POR	12.0	794
LT215/75R15	100/97Q	C	5.5-(6.0)-7.0	27.7	8.5	1765	1610	51	POR	12.6	756
LT235/75R15	104/101Q	C	6.0-(6.5)-8.0	28.9	9.3	1985	1820	51	POR	13.0	725
LT265/70R16	121/118Q	E	7.0-(8.0)-9.0	30.6	10.7	3195	2910	80	POR	13.9	683
LT305/70R16	118/115Q	D	8.0-(9.0)-10.0	32.8	12.2	2910	2680	51	POR	14.7	637
LT225/75R16	115/112Q	E	(6.0)-7.5	29.3	8.8	2680	2470	80	POR	13.3	714
LT245/75R16	120/116Q	E	6.5-(7.0)-8.0	30.5	9.8	3040	2780	80	POR	13.8	686
LT265/75R16	119/116Q	D	7.0-(7.5)-9.0	31.7	10.5	3000	2755	65	POR	14.3	661
LT265/75R16	123/120Q	E	7.0-(7.5)-9.0	31.7	10.5	3415	3085	80	-	14.3	661
LT285/75R16	116/113Q	C	7.5-(8.0)-9.5	32.8	11.3	2755	2535	51	POR	14.7	637
LT285/75R16	126/123Q	E	7.5-(8.0)-9.5	32.8	11.3	3750	3415	80	-	14.7	637
LT315/75R16	121/118Q	C	8.0-(8.5)-10.5	34.6	12.3	3195	2910	51	POR	15.4	605
LT315/75R16	127/124Q	D	8.0-(8.5)-10.5	34.6	12.3	3860	3525	65	-	15.4	605
LT215/85R16	115/112Q	E	5.5-(6.0)-7.0	30.4	8.5	2680	2470	80	POR	13.7	688
LT235/85R16	120/116Q	E	6.0-(6.5)-7.5	31.7	9.3	3040	2780	80	POR	14.3	659
LT265/65R17	120/117Q	E	(8.0)-9.5	30.6	10.7	3085	2835	80	POR	13.9	684
LT265/70R17	121/118Q	E	7.0-(8.0)-9.0	31.7	10.7	3195	2910	80	POR	14.4	661
LT285/70R17	121/118Q	D	7.5-(8.5)-9.5	32.8	11.5	3195	2910	65	POR	14.8	638
LT275/65R18	119/116Q	D	(8.0)-9.5	32.1	11.0	3000	2755	65	POR	14.6	652
LT285/65R18	121/118Q	D	(8.5)-10.0	32.6	11.5	3195	2910	65	POR	14.8	642
LT275/55R20	120/117Q	E	8.0-(8.5)-9.5	31.9	11.2	3085	2835	80	POR	14.8	656
LT285/55R20	117/114Q	D	8.5-(9.0)-10.0	32.4	11.7	2835	2600	65	POR	15.0	646
31x10.50R15LT	109Q	C	7.0-(8.5)-9.0	30.5	10.6	2270	-	51	POR	13.7	685
32x11.50R15LT	113Q	C	7.5-(9.0)-10.0	31.5	11.4	2535	-	51	POR	14.1	663
33x12.50R15LT	108Q	C	8.0-(10.0)-10.5	32.5	12.5	2205	-	35	POR	14.5	643
35x12.50R15LT	113Q	C	8.0-(10.0)-10.5	34.5	12.5	2535	-	35	POR	15.3	606
33x12.50R17LT	114Q	C	8.5-(10.0)-11.0	32.5	12.5	2600	-	51	POR	14.7	643
35x12.50R17LT	121Q	E	8.0-(10.0)-10.5	34.5	12.5	3195	-	65	POR	15.5	606
37x12.50R17LT	116Q	C	8.0-(10.0)-10.5	36.5	12.5	2755	-	35	POR	16.3	572
37x12.50R17LT	124Q	D	8.0-(10.0)-10.5	36.5	12.5	3525	-	51	-	16.3	572
33x12.50R18LT	118Q	E	8.5-(10.0)-11.0	32.5	12.5	2910	-	65	POR	14.8	643
35x12.50R18LT	118Q	D	8.5-(10.0)-11.0	34.5	12.5	2910	-	51	POR	15.6	606
33x12.50R20LT	114Q	E	8.5-(10.0)-11.0	32.5	12.5	2600	-	65	POR	15.0	643
35x12.50R20LT	121Q	E	8.5-(10.0)-11.0	34.5	12.5	3195	-	65	POR	15.8	606
35x13.50R20LT	121Q	E	9.5-(11.0)-12.0	34.5	13.6	3195	-	65	POR	15.8	606
35x13.50R20LT	126Q	F	9.5-(11.0)-12.0	34.5	13.6	3750	-	80	-	15.8	606
37x13.50R20LT	121Q	D	9.5-(11.0)-12.0	36.5	13.6	3195	-	51	POR	16.6	572
37x13.50R20LT	130Q	F	9.5-(11.0)-12.0	36.5	13.6	4190	-	80	-	16.6	572
33x12.50R22LT	109Q	E	10.0-(10.5)-12.0	32.5	12.5	2270	-	65	POR	15.2	643
35x12.50R22LT	117Q	E	8.5-(10.0)-11.0	34.5	12.5	2835	-	65	POR	16.0	606
35x12.50R22LT	121Q	F	8.5-(10.0)-11.0	34.5	12.5	3195	-	80	POR	16.0	606
37x13.50R22LT	118Q	D	9.5-(11.0)-12.0	36.5	13.6	2910	-	51	POR	16.8	572
37x13.50R22LT	128Q	F	9.5-(11.0)-12.0	36.5	13.6	3970	-	80	-	16.8	572
33x12.50R24LT	104Q	E	10.5-(11.5)-12.5	32.5	12.6	1985	-	65	POR	15.4	643
35x12.50R24LT	114Q	E	10.0-(10.5)-12.0	34.5	12.4	2600	-	65	POR	16.2	606
37x13.50R24LT	120Q	E	9.5-(11.0)-12.0	36.5	13.6	3085	-	65	POR	17.0	572
40x15.50R24LT	128P	E	11.0-(12.5)-14.0	39.5	15.6	3970	-	65	-	18.2	529
35x13.50R26LT	118Q	E	12.0-(12.5)-13.0	34.5	13.4	2910	-	65	POR	16.4	606
37x13.50R26LT	114Q	E	11.5-(12.0)-13.5	36.5	13.6	2600	-	65	POR	17.2	572
40x15.50R26LT	127P	E	12.5-(13.0)-14.5	39.5	15.6	3860	-	65	-	18.4	529

RA8000 R/T

M+S



HANDLING



ON/OFF



WET TRACTION



BRAKING

PROFESSIONAL ROCK CRAWLER TYRE.

STRONG TIRE
STRUCTURE

3-ply construction
contributes to
excellent durability
and wear resistance.

ANGULAR
TREAD PATTERN

3D angular design
provide additional
biting edges for
more traction.

OPEN SHOULDER
BLOCKS

Enhance impact
protection and
grip in muddy,
sandy or snowy
off-road conditions.

SPECIAL SIDE-
WALL DESIGN

Aesthetic design
for distinct look,
protects sidewall
from cutting and
puncture.

PRODUCT PERFORMANCE

9.3

OFF-ROAD PERFORMANCE	
DRY HANDLING	
WET PERFORMANCE	
RIDE COMFORT	
QUIET RIDE	
TREAD LIFE	
SNOW PERFORMANCE	

Rim Diameter ▾

16-24

Aspect Ratio ▾

80s-50s

Speed Rating ▾

Q

APPLICABLE
MODELS

TYRE SIZE	SERVIC E DESC.	LOAD RANGE	APPD. RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	POR	STATIC LOADED RADIUS (IN.)	REVS PER MILE
LT265/75R16	123/120Q	E	7.0-(7.5)-9.0	31.7	10.5	3415	3085	80	-	14.3	661
LT265/75R16	119/116Q	D	7.0-(7.5)-9.0	31.7	10.5	3000	2755	65	POR	14.3	661
LT285/75R16	126/123Q	E	7.5-(8.0)-9.5	32.8	11.3	3750	3415	80	-	14.7	637
LT265/65R17	120/117Q	E	(8.0)-9.5	30.6	10.7	3085	2835	80	POR	13.9	684
LT265/70R17	121/118Q	E	7.0-(8.0)-9.0	31.7	10.7	3195	2910	80	POR	14.4	661
LT285/70R17	121/118Q	E	7.5-(8.5)-9.5	32.8	11.5	3195	2910	80	POR	14.8	638
LT245/75R17	121/118Q	E	6.5-(7.0)-8.0	31.5	9.8	3195	2910	80	POR	14.3	664
LT235/80R17	120/117Q	E	6.0-(6.5)-8.0	31.8	9.3	3085	2835	80	POR	14.4	657
LT235/55R18	109/105Q	E	7.0-(7.5)-8.5	28.4	9.6	2270	2040	80	POR	13.1	737
LT265/60R18	119/116Q	E	(8.0)-9.5	30.5	10.7	3000	2755	80	POR	14.0	685
LT285/60R18	122/119Q	E	(8.5)-10.0	31.5	11.5	3305	3000	80	-	14.4	665
LT285/60R18	118/115Q	D	(8.5)-10.0	31.5	11.5	2910	2680	65	POR	14.4	665
LT265/65R18	122/119Q	E	(8.0)-9.5	31.5	10.7	3305	3000	80	-	14.4	663
LT265/65R18	117/114Q	D	(8.0)-9.5	31.5	10.7	2835	2600	65	POR	14.4	663
LT275/65R18	123/120Q	E	(8.0)-9.5	32.1	11.0	3415	3085	80	-	14.6	652
LT285/65R18	125/122Q	E	(8.5)-10.0	32.6	11.5	3640	3305	80	-	14.8	642
LT285/65R18	121/118Q	D	(8.5)-10.0	32.6	11.5	3195	2910	65	POR	14.8	642
LT265/70R18	124/121Q	E	7.0-(8.0)-9.0	32.6	10.7	3525	3195	80	-	14.8	641
LT265/70R18	120/117Q	D	7.0-(8.0)-9.0	32.6	10.7	3085	2835	65	POR	14.8	641
LT275/70R18	125/122Q	E	7.0-(8.0)-9.0	33.2	11.0	3640	3305	80	-	15.1	630
LT295/70R18	129/126Q	E	7.5-(8.5)-10.0	34.3	11.8	4080	3750	80	-	15.5	610
LT285/75R18	129/126Q	E	7.5-(8.0)-9.5	34.8	11.3	4080	3750	80	-	15.7	600
LT285/75R18	119/116Q	C	7.5-(8.0)-9.5	34.8	11.3	3000	2755	51	POR	15.7	600
LT255/60R19	118/115Q	E	(7.5)-9.0	31.3	10.2	2910	2680	80	POR	14.4	668
LT265/50R20	115/112Q	E	8.0-(8.5)-9.5	30.5	10.9	2680	2470	80	POR	14.2	686
LT275/55R20	120/117Q	E	8.0-(8.5)-9.5	31.9	11.2	3085	2835	80	POR	14.8	656
LT285/55R20	122/119Q	E	8.5-(9.0)-10.0	32.4	11.7	3305	3000	80	-	15.0	646
LT285/55R20	117/114Q	D	8.5-(9.0)-10.0	32.4	11.7	2835	2600	65	POR	15.0	646
LT305/55R20	125/122Q	F	9.0-(9.5)-11.0	33.2	12.4	3640	3305	80	-	15.3	629
35x12.50R17LT	121Q	F	8.0-(10.0)-10.5	34.5	12.5	3195	-	80	POR	15.5	606
37x12.50R17LT	121Q	F	8.0-(10.0)-10.5	36.5	12.5	3195	-	80	POR	16.3	572
35x13.50R17LT	121Q	F	9.0-(11.0)-11.5	34.5	13.6	3195	-	80	POR	15.5	606
37x13.50R17LT	125Q	F	9.0-(11.0)-11.5	36.5	13.6	3640	-	80	-	16.3	572
37x13.50R17LT	121Q	E	9.0-(11.0)-11.5	36.5	13.6	3195	-	65	POR	16.3	572
39x13.50R17LT	125Q	F	9.0-(11.0)-11.5	38.5	13.6	3640	-	80	-	17.1	543
40x13.50R17LT	125Q	F	9.0-(11.0)-11.5	39.5	13.6	3640	-	80	-	17.5	529
40x13.50R17LT	121Q	D	9.0-(11.0)-11.5	39.5	13.6	3195	-	51	POR	17.5	529
38x15.50R17LT	125Q	F	11.0-(12.5)-14.0	37.5	15.6	3640	-	80	-	16.7	557
38x15.50R17LT	121Q	D	11.0-(12.5)-14.0	37.5	15.6	3195	-	51	POR	16.7	557
33x12.50R18LT	122Q	F	8.5-(10.0)-11.0	32.5	12.5	3305	-	80	-	14.8	643
35x12.50R18LT	128Q	F	8.5-(10.0)-11.0	34.5	12.5	3970	-	80	-	15.6	606
33x12.50R20LT	119Q	F	8.5-(10.0)-11.0	32.5	12.5	3000	-	80	POR	15.0	643
35x12.50R20LT	125Q	F	8.5-(10.0)-11.0	34.5	12.5	3640	-	80	-	15.8	606
35x12.50R20LT	121Q	E	8.5-(10.0)-11.0	34.5	12.5	3195	-	65	POR	15.8	606
37x12.50R20LT	128Q	F	8.5-(10.0)-11.0	36.5	12.5	3970	-	80	-	16.6	572
44x14.50R20LT	128Q	C	10.5-(11.5)-12.5	43.4	14.5	3970	-	35	-	20.0	480
33x12.50R22LT	114Q	F	10.0-(10.5)-12.0	32.5	12.5	2600	-	80	POR	15.2	643
35x12.50R22LT	121Q	F	8.5-(10.0)-11.0	34.5	12.5	3195	-	80	POR	16.0	606
33x12.50R24LT	106Q	F	10.5-(11.5)-12.5	32.5	12.6	2095	-	80	POR	15.4	643
35x12.50R24LT	116Q	F	10.0-(10.5)-12.0	34.5	12.4	2755	-	80	POR	16.2	606

RA 7000 X/T

M+S



ECONOMY

HANDLING

SILENCE

WET TRACTION

COMFORT

EXCELLENT OFF-ROAD DURABILITY:

Multiple sidewall plies and reinforcing materials improves the durability and puncture resistance of the tire; the thickened protection design on tire shoulder prevents all impacts and punctures, making the tires safer.

EXCELLENT MILEAGE:

The optimized profile design makes the contact area flatter, providing excellent mileage; the optimized pattern block arrangement provides an optimal balance of off-road traction and long, even wear.

EXCELLENT OFF-ROAD TRACTION:

Specially designed tread pattern provides support and strong grip on any rugged road; Sipes and narrow grooves are combined in each tread block to provide slip resistance on wet, snow and slippery surfaces; Larger shoulder blocks enable the tire to maintain excellent grip on various road surfaces at all times.

DRIVE MORE QUIETLY AND COMFORTABLY:

Unique tread pattern design, optimized pattern pitches and sequence greatly reduce pattern and road noise, and obtain smooth and quiet driving on the road.

PRODUCT PERFORMANCE 9.3



Rim Diameter	Aspect Ratio	Speed Rating	UTQG
14-20	100s-50s	H/R/S/T	420/A/B

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	APPLICABLE MODELS					STATIC LOADED RADIUS(IN.)	REVS PER MILE
																
TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE		
175/80R14	92T	XL	4.5-(5.0)-6.0	25.0	7.0	1389	-	50	420AB	D	E	71	11.4	835		
205/60R15	91H	SL	5.5-(6.0)-7.5	24.7	8.2	1356	-	44	420AB	D	E	72	11.4	847		
205/65R15	94H	SL	5.5-(6.0)-7.5	25.5	8.2	1477	-	44	420AB	D	E	72	11.7	821		
205/70R15	96T	SL	5.0-(6.0)-7.0	26.3	8.2	1565	-	44	420AB	D	E	72	12.0	794		
215/75R15	100S	SL	5.5-(6.0)-7.0	27.7	8.5	1765	-	44	420AB	D	E	72	12.6	756		
235/75R15	105T	SL	6.0-(6.5)-8.0	28.9	9.3	2028	-	44	420AB	D	E	72	13.0	725		
205/60R16	92T	SL	5.5-(6.0)-7.5	25.7	8.2	1389	-	44	420AB	D	E	72	11.9	815		
215/65R16	102H	XL	6.0-(6.5)-7.5	27.0	8.7	1653	-	50	420AB	D	E	72	12.4	774		
215/70R16	100T	SL	5.5-(6.5)-7.0	27.9	8.7	1764	-	44	420AB	D	E	72	12.8	750		
225/70R16	103T	SL	6.0-(6.5)-7.5	28.4	9.0	1929	-	44	420AB	D	E	72	13.0	736		
235/70R16	106T	SL	6.0-(7.0)-8.0	29.0	9.4	2094	-	44	420AB	D	E	72	13.2	722		
255/70R16	111T	SL	6.5-(7.5)-8.5	30.1	10.2	2403	-	44	420AB	D	E	73	13.6	695		
275/70R16	114T	SL	7.0-(8.0)-9.0	31.2	11.0	2601	-	44	420AB	D	E	73	14.1	671		
225/65R17	102T	SL	6.0-(6.5)-8.0	28.5	9.0	1874	-	44	420AB	D	E	72	13.1	734		
235/65R17	108T	XL	6.5-(7.0)-8.5	29.1	9.4	2205	-	50	420AB	D	E	72	13.3	720		
245/65R17	111T	XL	(7.0)-8.5	29.5	9.8	2403	-	50	420AB	D	E	72	13.5	708		
235/60R18	103T	SL	6.5-(7.0)-8.5	29.1	9.4	1929	-	44	420AB	D	E	72	13.4	719		
285/60R18	116T	SL	(8.5)-10.0	31.5	11.5	2756	-	44	420AB	D	E	75	14.4	665		
255/55R19	111H	XL	7.0-(8.0)-9.0	30.0	10.4	2403	-	50	420AB	D	E	73	13.9	696		
265/50R20	111T	XL	7.5-(8.5)-9.5	30.5	10.9	2403	-	50	420AB	D	E	73	14.2	686		
275/60R20	115T	SL	7.5-(8.0)-9.5	33.0	11.0	2679	-	44	420AB	D	E	73	15.2	634		
195R15C	106/104S	D	5.0-(5.5)-6.0	27.2	7.8	2095	1985	65	-	C	B	75	12.4	770		
LT215/70R16	106/103S	D	5.5-(6.5)-7.0	27.9	8.7	2094	1929	65	-	C	B	75	12.8	750		
LT225/70R16	108/105S	D	6.0-(6.5)-7.5	28.4	9.0	2205	2040	65	-	C	B	75	13.0	736		
LT235/70R16	110/107S	D	6.0-(7.0)-8.0	29.2	9.4	2335	2150	65	-	C	B	75	13.3	716		
LT245/70R16	118/115S	E	6.5-(7.0)-8.0	29.8	9.8	2910	2680	80	-	C	B	75	13.5	703		
LT255/60R18	117/114S	E	(7.5)-9.0	30.3	10.2	2835	2600	80	-	C	B	75	13.9	691		
LT265/60R18	119/116S	E	(8.0)-9.5	30.7	10.7	3000	2755	80	-	C	B	75	14.1	680		
LT205/70R15	96/93S	C	5.0-(6.0)-7.0	26.3	8.2	1565	1435	51	-	C	B	75	12.0	794		
LT215/75R15	100/97R	C	5.5-(6.0)-7.0	27.7	8.5	1765	1610	51	-	C	B	75	12.6	756		
LT235/75R15	104/101R	C	6.0-(6.5)-8.0	28.9	9.3	1985	1820	51	-	C	B	75	13.0	725		
LT265/70R16	121/118R	E	7.0-(8.0)-9.0	30.6	10.7	3195	2910	80	-	C	B	75	13.9	683		
LT225/75R16	115/112R	E	(6.0)-7.5	29.3	8.8	2680	2470	80	-	C	B	75	13.3	714		
LT245/75R16	120/116R	E	6.5-(7.0)-8.0	30.5	9.8	3040	2780	80	-	C	B	75	13.8	686		
LT265/75R16	123/120S	E	7.0-(7.5)-9.0	31.7	10.5	3415	3085	80	-	C	B	75	14.3	661		
LT285/75R16	126/123R	E	7.5-(8.0)-9.5	32.8	11.3	3750	3415	80	-	C	B	75	14.7	637		
LT235/85R16	120/116R	E	6.0-(6.5)-7.5	31.7	9.3	3040	2780	80	-	C	B	75	14.3	659		
LT265/65R17	120/117S	E	(8.0)-9.5	30.6	10.7	3085	2835	80	-	C	B	75	13.9	684		
LT245/70R17	119/116S	E	6.5-(7.0)-8.0	30.6	9.8	3000	2755	80	-	C	B	75	13.9	684		
LT265/70R17	123/120R	E	7.0-(8.0)-9.0	31.7	10.7	3415	3085	80	-	C	B	75	14.4	661		
LT285/70R17	126/123S	E	7.5-(8.5)-9.5	32.8	11.5	3750	1550	80	-	C	B	75	14.8	638		
LT315/70R17	126/123S	E	8.0-(9.5)-10.5	34.4	12.7	3750	1550	65	-	-	-	-	15.5	608		
LT265/65R18	122/119S	E	(8.0)-9.5	31.5	10.7	3305	3000	80	-	C	B	75	14.4	663		
LT275/65R18	123/120S	E	(8.0)-9.5	32.1	11.0	3415	3085	80	-	C	B	75	14.6	652		
LT285/65R18	125/122S	E	(8.5)-10.0	32.6	11.5	3640	3305	80	-	C	B	75	14.8	642		
LT265/70R18	124/121S	E	7.0-(8.0)-9.0	32.6	10.7	3525	3195	80	-	C	B	75	14.8	641		
LT275/70R18	125/122S	E	7.0-(8.0)-9.0	33.2	11.0	3640	3305	80	-	C	B	75	15.1	630		
LT285/50R20	119/116S	E	8.5-(9.0)-10.0	31.3	11.7	3000	2755	80	-	C	B	75	14.5	669		
LT275/55R20	120/117S	E	8.0-(8.5)-9.5	31.9	11.2	3085	2835	80	-	C	B	75	14.8	656		
31x10.50R15LT	109S	C	7.0-(8.5)-9.0	30.7	10.6	2270	-	51	-	C	B	75	13.8	680		

RA1100 A/T

M+S



DESIGNED FOR ALL TERRAIN

The precise ratio of tire tread improves the traction and handling on mud and rock roads.

WHITE LETTERING

Provides amazing aesthetic perception.

3D BLOCK DESIGN

For reducing tread damage in rough road condition.

SPECIAL COMPOUND

Increased the cutting resistance.

PRODUCT PERFORMANCE

9.2



Rim Diameter	Aspect Ratio	Speed Rating	UTQG
14-24	100s-40s	H/R/S/T/Q	420/A/B

APPLICABLE MODELS



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	SIDE WALL	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
175/75R13	85T	SL	4.5-(5.0)-6.0	23.3	7.0	1135	-	50	420AB	RWL	D	D	71	10.9	891
185/70R14	88T	SL	4.5-(5.5)-6.0	24.3	7.4	1235	-	44	420AB	RWL	D	D	70	11.0	857
175/75R14	86T	SL	4.5-(5.0)-6.0	24.3	7.0	1168	-	44	420AB	RWL	D	D	71	11.4	853
175/80R14	92T	XL	4.5-(5.0)-6.0	25.0	7.0	1389	-	50	420AB	RWL	D	D	71	11.3	830
205/60R15	91H	SL	5.5-(6.0)-7.5	24.7	8.2	1356	-	44	420AB	RWL	D	D	71	11.3	842
205/65R15	94H	SL	5.5-(6.0)-7.5	25.5	8.2	1477	-	44	420AB	RWL	D	D	71	11.6	816
205/70R15	96T	SL	5.0-(6.0)-7.0	26.3	8.2	1565	-	44	420AB	RWL	D	D	71	11.9	789
235/70R15	106S	XL	6.0-(7.0)-8.0	30.0	9	2094	-	50	420AB	RWL	-	-	-	13.0	740
215/75R15	100S	SL	5.5-(6.0)-7.0	27.7	8.5	1765	-	44	420AB	RWL	D	D	71	12.4	751
P235/75R15	105T	SL	6.0-(6.5)-8.0	28.9	9.3	2028	-	44	420AB	RWL	D	D	71	12.9	720
195/80R15	100T	XL	5-(5.5)-6.5	28.3	7.7	1764	-	50	420AB	RWL	D	D	72	12.3	763
205/55R16	94H	XL	5.5-(6.5)-7.5	24.9	8.4	1477	-	50	420AB	RWL	D	D	72	11.5	835
205/60R16	92T	SL	5.5-(6.0)-7.5	25.7	8.2	1389	-	44	420AB	RWL	D	D	71	11.8	809
215/65R16	102H	XL	6.0-(6.5)-7.5	27.0	8.7	1874	-	50	420AB	RWL	D	D	72	12.3	769
P215/70R16	99T	SL	5.5-(6.5)-7.0	27.9	8.7	1709	-	44	420AB	RWL	D	D	71	12.6	745
P225/70R16	101T	SL	6.0-(6.5)-7.5	28.4	9.0	1819	-	44	420AB	RWL	D	D	71	12.8	731
P235/70R16	104S	SL	6.0-(7.0)-8.0	29.0	9.4	1984	-	44	420AB	RWL	D	D	71	13.1	717
P245/70R16	111T	XL	6.5-(7.0)-8.0	29.5	9.8	2403	-	50	420AB	RWL	D	D	71	13.3	704
P255/70R16	111T	SL	6.5-(7.5)-8.5	30.1	10.2	2403	-	44	420AB	RWL	D	D	72	13.5	691
P265/70R16	111T	SL	7.0-(8.0)-9.0	30.6	10.7	2403	-	44	420AB	RWL	D	D	72	13.7	678
P275/70R16	114T	SL	7.0-(8.0)-9.0	31.2	11.0	2601	-	44	420AB	RWL	D	D	72	13.9	666
P215/60R17	100T	XL	6.0-(6.5)-7.5	27.2	8.7	1764	-	50	420AB	RWL	D	D	72	12.5	765
225/60R17	103H	XL	6.0-(6.5)-8.0	27.6	9.0	1929	-	50	420AB	RWL	D	D	72	12.6	752
235/60R17	106H	XL	6.5-(7.0)-8.5	28.1	9.4	2094	-	50	420AB	RWL	D	D	72	12.8	739
225/65R17	102T	SL	6.0-(6.5)-8.0	28.5	9.0	1874	-	44	420AB	RWL	D	D	71	13.0	729
235/65R17	108H	XL	6.5-(7.0)-8.5	29.1	9.4	2205	-	50	420AB	RWL	D	D	72	13.2	715
P245/65R17	111T	XL	(7.0)-8.5	29.5	9.8	2403	-	50	420AB	RWL	D	D	72	13.4	704
255/65R17	114H	XL	7.0-(7.5)-9.0	30.1	10.2	2601	-	50	420AB	RWL	D	D	73	13.6	691
P265/65R17	112S	SL	7.5-(8.0)-9.5	30.6	10.7	2469	-	44	420AB	RWL	D	D	72	13.8	680
P265/70R17	115T	SL	7.0-(8.0)-9.0	31.7	10.7	2679	-	44	420AB	RWL	D	D	72	14.2	656
235/50R18	101H	XL	6.5-(7.5)-8.5	27.3	9.6	1819	-	50	420AB	RBL	D	D	72	12.6	761
235/50R18	104H	XL	6.5-(7.5)-8.5	27.3	9.6	1985	-	50	420AB	RBL	D	D	72	12.64	761
215/55R18	99H	XL	6.0-(7.0)-7.5	27.3	8.9	1709	-	50	420AB	RWL	D	D	72	12.6	761
P235/55R18	104T	XL	6.5-(7.5)-8.5	28.1	9.6	1984	-	50	420AB	RWL	D	D	72	13.0	738
255/55R18	109H	XL	7.0-(8.0)-9.0	29.0	10.4	2271	-	50	420AB	RWL	D	D	73	13.3	716
P225/60R18	104T	XL	6.0-(6.5)-8.0	28.6	9.0	1984	-	50	420AB	RWL	D	D	72	13.1	726
235/60R18	103T	SL	6.5-(7.0)-8.5	29.1	9.4	1929	-	44	420AB	RWL	D	D	71	13.3	714
245/60R18	105T	SL	(7.0)-8.5	29.6	9.8	2039	-	44	420AB	RWL	D	D	71	13.5	703
265/60R18	114H	XL	7.5-(8.0)-9.5	30.5	10.7	2601	-	50	420AB	RWL	D	D	73	13.9	681
285/60R18	116T	SL	(8.5)-10.0	31.5	11.5	2756	-	44	420AB	RWL	D	D	74	14.3	660
235/65R18	106T	SL	6.5-(7.0)-8.5	30.0	9.4	2094	-	44	420AB	RWL	D	D	71	13.7	692
*265/65R18	114V	-	7.5-(8.0)-9.5	32.7	11	2601	-	44	420AB	BSW	D	D	72	14.3	659
265/70R18	116T	SL	7.0-(8.0)-9.0	32.6	10.7	2756	-	44	420AB	RWL	D	D	72	14.7	636
235/50R19	103H	XL	6.5-(7.5)-8.5	28.3	9.6	1929	-	50	420AB	RWL	D	D	72	13.1	734
225/55R19	103H	XL	6.0-(7.0)-8.0	28.8	9.2	1929	-	50	420AB	RWL	D	D	72	13.3	722
245/55R19	107H	XL	7.0-(7.5)-8.5	29.6	10.0	2149	-	50	420AB	RWL	D	D	72	13.7	701
255/55R19	111H	XL	7.0-(8.0)-9.0	30.0	10.4	2403	-	50	420AB	RWL	D	D	73	13.8	692
265/55R19	113H	XL	7.5-(8.5)-9.5	30.5	10.9	2535	-	50	420AB	RWL	D	D	73	14.0	681
P235/60R19	107T	XL	6.5-(7.0)-8.5	30.1	9.4	2149	-	50	420AB	RWL	D	D	72	13.8	690
255/60R19	113T	XL	7.0-(7.5)-9.0	31.1	10.2	2535	-	50	420AB	RWL	D	D	73	14.2	669
275/45R20	110H	XL	8.5-(9.0)-10.5	29.8	10.7	2337	-	50	420AB	RWL	D	D	73	14.1	703
255/50R20	109H	XL	7.0-(8.0)-9.0	30.1	10.4	2271	-	50	420AB	RWL	D	D	73	14.3	696
265/50R20	107T	SL	7.5-(8.5)-9.5	30.5	10.9	2149	-	44	420AB	RWL	D	D	72	14.1	682
275/50R20	113H	XL	7.5-(8.5)-9.5	30.9	11.2	2535	-	50	420AB	RWL	D	D	73	14.6	678
265/60R20	115T	XL	(8.0)-9.5	32.5	10.7	2679	-	50	420AB	RWL	D	D	73	15.3	639
P275/60R20	115T	SL	7.5-(8.0)-9.5	33.0	11.0	2679	-	44	420AB	RWL	D	D	72	15.1	630

* being developed

APPLICABLE
MODELS

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	SIDE WALL	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
275/40R22	107T	XL	9.0-(9.5)-11.0	30.7	10.9	2149	-	50	420AB	RWL	D	D	73	14.4	677
295/40R22	112H	XL	10.0-(10.5)-11.5	31.3	11.9	2469	-	50	420AB	RWL	D	D	73	14.9	668
285/40R24	112H	XL	9.5-(10.0)-11.0	33.0	11.4	2469	-	50	420AB	RWL	-	-	-	15.5	630
245/75R15C	109/107S	C	6.5-(7.0)-7.5	29.5	9.8	3640	3305	54	-	RWL	C	E	75	13.7	840
215/65R16C	109/107R	D	6.0-(6.5)-7.0	27.0	6.5	2271	2149	69	-	RWL	-	-	-	12.6	775
225/65R16C	112/110R	D	6.0-(6.5)-7.0	27.5	6.5	2469	2337	69	-	RWL	-	-	-	12.8	760
235/65R16C	121/119R	E	6.5-(7.0)-7.5	28.0	7.0	3197	2998	83	-	RWL	-	-	-	13.1	747
195/75R16C	110/108R	E	5.0-(5.5)-6.0	27.5	5.5	2337	2205	76	-	RWL	-	-	-	12.9	755
205/75R16C	113/111R	E	(5.5)-6.5	28.1	5.5	2535	2403	76	-	RWL	-	-	-	13.1	740
215/75R16C	116/114Q	E	5.5-(6.0)-7.0	28.7	8.5	2755	2600	77	-	RWL	C	E	75	13.1	730
255/45R18C	109/107Q	D	8.0-(8.5)-9.0	27.0	8.5	2271	2149	69	-	RWL	-	-	-	12.8	774
195R15C	106/104R	D	5.0-(5.5)-6.0	27.2	7.8	2095	1985	65	-	RWL	C	E	75	12.4	770
185R14LT	102/100R	D	5.0-(5.5)-6.0	25.7	7.4	1875	1765	65	-	RWL	C	E	75	11.7	815
LT175/70R14	98/96S	E	4.5-(5.0)-6.0	23.9	7.0	1655	1565	80	-	RWL	C	E	75	11.0	874
LT185/70R14	96/93S	D	5.0-(5.5)-6.0	24.3	5.5	1565	1435	65	-	RWL	-	-	-	11.2	858
LT175/80R14	95/92S	D	4.5-(5.0)-5.5	25.0	5.0	1520	1390	65	-	RWL	-	-	-	11.7	830
LT205/60R15	98/95S	D	(6.0)-6.5	24.7	6.0	1655	1520	65	-	RWL	-	-	-	11.6	847
LT205/65R15	99/96S	D	5.5-(6.0)-6.5	25.5	6.0	1710	1565	65	-	RWL	-	-	-	11.9	820
LT205/70R15	96/93S	C	5.0-(6.0)-7.0	26.6	8.2	1565	1435	51	-	RWL	C	E	75	12.1	787
LT215/75R15	100/97R	C	5.5-(6.0)-7.0	27.9	8.5	1765	1610	51	-	RWL	C	E	75	12.7	749
LT235/75R15	104/101R	C	6.0-(6.5)-8.0	29.1	9.3	1985	1820	51	-	RWL	C	E	75	13.1	719
LT205/55R16	98/96S	C	6.0-(6.5)	24.9	6.5	1655	1565	50	-	RWL	-	-	-	11.7	841
LT205/60R16	100/98S	C	(6.0)-6.5	25.7	6.0	1765	1655	50	-	RWL	-	-	-	12.0	815
LT215/70R16	106/103S	D	5.5-(6.5)-7.0	27.9	6.5	2095	1930	65	-	RWL	-	-	-	12.9	746
LT225/70R16	108/105S	D	6.0-(6.5)-7.5	28.4	6.5	2205	2040	65	-	RWL	-	-	-	13.1	732
LT235/70R16	110/107S	D	6.0-(7.0)-8.0	29.2	9.4	2335	2150	65	-	RWL	C	E	75	13.3	716
LT245/70R16	113/110S	D	6.5-(7.0)-8.0	29.8	9.8	2535	2335	65	-	RWL	C	E	75	13.5	703
LT255/70R16	115/112R	D	6.5-(7.5)-8.5	30.1	7.5	2680	2470	65	-	RWL	-	-	-	13.8	692
LT265/70R16	121/118R	E	7.0-(8.0)-9.0	30.9	10.7	3195	2910	80	-	RWL	C	E	75	13.9	678
LT225/75R16	115/112R	E	(6.0)-7.5	29.5	8.8	2680	2470	80	-	RWL	C	E	75	13.4	708
LT245/75R16	120/116R	E	6.5-(7.0)-8.0	30.7	9.8	3040	2780	80	-	RWL	C	E	75	13.9	681
LT265/75R16	123/120S	E	7.0-(7.5)-9.0	31.9	10.5	3415	3085	80	-	RWL	D	C	75	14.4	656
LT285/75R16	126/123R	E	7.5-(8.0)-9.5	33.1	11.3	3750	3415	80	-	RWL	D	C	75	14.8	632
LT315/75R16	127/124R	E	8.0-(8.5)-10.5	34.6	12.3	3860	3525	65	-	RWL	-	-	-	15.9	807
LT215/85R16	115/112R	E	5.5-(6.0)-7.0	30.6	8.5	2680	2470	80	-	RWL	C	E	75	13.9	683
LT235/85R16	120/116R	E	6.0-(6.5)-7.5	32.0	9.3	3040	2780	80	-	RWL	C	E	75	14.4	654
LT215/60R17	109/107S	D	6.0-(6.5)-7.0	27.2	6.5	2270	2150	65	-	RWL	-	-	-	12.8	770
LT225/60R17	104/101S	D	(6.5)-7.5	27.6	6.5	1985	1820	65	-	RWL	-	-	-	13.0	757
LT225/65R17	107/103S	D	(6.5)-8.0	28.7	9.0	2150	1930	65	-	RWL	C	E	75	13.2	728
LT235/65R17	109/105S	D	(7.0)-8.5	29.1	7.0	2270	2040	65	-	RWL	-	-	-	13.6	720
LT245/65R17	111/108S	D	(7.0)-8.5	29.5	9.8	2405	2205	65	-	RWL	C	E	75	13.5	708
LT255/65R17	114/110R	D	(7.5)-9.0	30.1	7.5	2600	2340	65	-	RWL	-	-	-	14.0	696
LT265/65R17	120/117S	E	(8.0)-9.5	30.8	10.7	3085	2835	80	-	RWL	C	E	75	14.0	679
LT275/65R17	121/118S	E	(8.0)-9.5	31.3	11.0	3195	2910	80	-	RWL	C	E	75	14.3	667
LT285/65R17	121/118S	E	(8.5)-10.0	31.6	11.5	3195	2910	80	-	RWL	C	E	75	14.3	662
LT245/70R17	119/116S	E	6.5-(7.0)-8.0	30.8	9.8	3000	2755	80	-	RWL	C	E	75	14.0	679
LT265/70R17	121/118R	E	7.0-(8.0)-9.0	31.9	10.7	3195	2910	80	-	RWL	C	E	75	14.4	656
LT275/70R17	121/118S	E	7.0-(8.0)-9.0	32.4	11.0	3195	2910	80	-	RWL	C	E	75	14.7	645
LT285/70R17	121/118S	E	7.5-(8.5)-9.5	33.0	11.5	3195	2910	80	-	RWL	C	E	75	14.9	634
LT305/70R17	125/122R	E	8.0-(9.0)-10.0	33.9	12.2	3640	3305	65	-	RWL	-	-	-	15.2	618
LT315/70R17	121/118S	E	8.0-(9.5)-10.5	34.6	12.7	3195	2910	65	-	RWL	C	E	75	15.6	604
LT245/75R17	121/118S	E	6.5-(7.0)-8.0	31.7	9.8	3195	2910	80	-	RWL	C	E	75	14.4	659
LT255/75R17	121/118S	E	6.5-(7.0)-8.5	32.3	10.0	3195	2910	80	-	RWL	C	E	75	14.6	648
LT235/80R17	120/117R	E	6.0-(6.5)-8.0	32.0	9.3	3085	2835	80	-	RWL	C	E	75	14.5	653
LT225/60R18	106/102S	D	(6.5)-8.0	28.6	6.5	2095	1875	65	-	RWL	-	-	-	13.5	731

APPLICABLE
MODELS

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	SIDE WALL	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
LT235/60R18	108/104S	D	(7.0)-8.5	29.3	9.4	2205	1985	65	-	RWL	C	E	75	13.5	713
LT245/60R18	110/107S	D	(7.0)-8.5	29.6	9.8	2335	2150	65	-	RWL	C	E	75	13.6	707
LT255/60R18	112/108S	D	(7.5)-9.0	30.3	10.2	2470	2205	65	-	RWL	C	E	75	13.9	691
LT255/65R18	120/117S	E	7-(7.5)-9	31.1	10.2	3085	2835	80	-	RWL	C	E	75	13.7	669
LT265/60R18	114/110S	D	(8.0)-9.5	30.7	10.7	2600	2335	65	-	RWL	C	E	75	14.1	680
LT285/60R18	118/115S	D	(8.5)-10.0	31.7	11.5	2910	2680	65	-	RWL	C	E	75	14.5	660
LT235/65R18	110/107S	D	6.5-(7.0)-8.5	30.0	9.4	2335	2150	65	-	RWL	C	E	75	13.8	696
LT265/65R18	122/119S	E	(8.0)-9.5	31.8	10.7	3305	3000	80	-	RWL	D	C	75	14.5	658
LT275/65R18	123/120S	E	(8.0)-9.5	32.3	11.0	3415	3085	80	-	RWL	D	C	75	14.7	647
LT285/65R18	125/122S	E	(8.5)-10.0	32.8	11.5	3640	3305	80	-	RWL	D	C	75	14.9	638
LT255/70R18	121/118Q	E	6.5-(7.5)-8.5	32.3	10.2	3195	2910	80	-	RWL	C	E	75	14.7	647
LT265/70R18	124/121S	E	7.0-(8.0)-9.0	32.9	10.7	3525	3195	80	-	RWL	D	C	75	15.0	636
LT275/70R18	125/122S	E	7.0-(8.0)-9.0	33.4	11.0	3640	3305	80	-	RWL	D	C	75	15.2	626
LT285/70R18	127/124S	E	7.5-(8.5)-9.5	33.7	11.5	3860	3525	80	-	RWL	D	C	75	15.1	832
LT255/50R19	113/110S	E	7.0-(8.0)-9.0	29.1	10.4	2535	2335	80	-	RWL	C	E	75	13.5	719
LT235/55R19	111/108S	E	7.0-(7.5)-8.5	29.2	9.6	2405	2205	80	-	RWL	C	E	75	13.6	717
LT245/55R19	110/107S	D	7.0-(7.5)-8.5	29.6	10.0	2335	2150	65	-	RWL	C	E	75	13.8	705
LT255/55R19	111/108S	D	7.5-(8.0)-9.0	30.3	10.4	2405	2205	65	-	RWL	C	E	75	14.0	691
LT265/55R19	116/113R	E	7.5-(8.5)-9.5	30.5	8.5	2755	2535	80	-	RWL	-	-	-	14.3	686
LT275/55R19	119/116S	E	7.5-(8.5)-9.5	30.9	11.2	3000	2755	80	-	RWL	C	E	75	14.3	677
LT235/65R19	117/114S	E	6.5-(7.0)-8.5	31.1	9.4	2835	2600	80	-	RWL	C	E	75	14.3	673
LT245/50R20	108/104S	D	7.0-(7.5)-8.5	29.6	10.0	2205	1985	65	-	RWL	C	E	75	13.9	705
LT265/50R20	115/112S	E	8.0-(8.5)-9.5	30.7	10.9	2680	2470	80	-	RWL	C	E	75	14.3	681
LT285/50R20	119/116S	E	8.5-(9.0)-10.0	31.5	11.7	3000	2755	80	-	RWL	C	E	75	14.6	664
LT255/55R20	117/114S	E	7.0-(8.0)-9.0	31.0	10.4	2835	2600	80	-	RWL	C	E	75	14.4	674
LT265/55R20	119/116R	E	7.5-(8.5)-9.5	31.5	10.9	3000	2755	80	-	RWL	C	E	75	14.8	668
LT275/55R20	120/117S	E	8.0-(8.5)-9.5	32.1	11.2	3085	2835	80	-	RWL	C	E	75	14.8	651
LT285/55R20	122/119S	E	8.5-(9.0)-10.0	32.6	11.7	3305	3000	80	-	RWL	D	C	75	15.0	641
LT305/55R20	121/118S	E	9.0-(9.5)-11.0	33.5	12.4	3195	2910	65	-	RWL	C	E	75	15.4	625
LT255/60R20	120/117S	E	(7.5)-9.0	32.0	10.2	3085	2835	80	-	RWL	C	E	75	14.8	653
LT275/60R20	119/116S	D	(8.0)-9.5	33.2	11.0	3000	2755	65	-	RWL	C	E	75	15.3	629
LT285/60R20	125/122S	E	8-(8.5)-10.0	33.5	11.5	3640	3305	80	-	RWL	D	C	75	15.7	616
LT295/60R20	126/123S	E	8-(8.5)-10.0	33.9	11.8	3750	3415	80	-	RWL	D	C	75	15.9	604
LT305/60R20	123/120S	E	(9.0)-11.0	34.6	12.2	3415	3085	65	-	RWL	D	C	75	15.9	604
LT275/65R20	126/123S	E	(8.0)-9.5	34.3	11.0	3750	3415	80	-	RWL	D	C	75	15.7	609
LT265/45R21	111/108R	E	8.5-(9.0)-10.0	30.4	10.5	2405	2205	80	-	RWL	C	E	75	12.8	693
LT275/45R21	113/110S	E	8.5-(9.0)-10.5	30.7	10.7	2535	2335	80	-	RWL	C	E	75	14.4	680
LT275/50R21	118/115S	E	7.5-(8.5)-9.5	31.9	11.2	2910	2680	80	-	RWL	C	E	75	14.8	657
LT285/45R22	117/114S	E	9.0-(9.5)-10.5	32.1	11.2	2835	2600	80	-	RWL	C	E	75	15.0	652
LT275/50R22	119/116S	E	8.0-(8.5)-9.5	32.9	11.2	3000	2755	80	-	RWL	C	E	75	15.4	636
31x10.50R15LT	109S	C	7.0-(8.5)-9.0	30.7	10.6	2270	-	51	-	RWL	C	E	75	13.8	680
33x12.50R15LT	108R	C	8.0-(10.0)-10.5	32.5	12.5	2205	-	35	-	RWL	C	E	75	14.5	643
35x12.50R15LT	113R	C	8.0-(10.0)-10.5	34.5	12.5	2535	-	35	-	RWL	C	E	75	15.3	606
33x12.50R17LT	120S	E	8.5-(10.0)-11.0	32.8	12.5	3085	-	65	-	RWL	C	E	75	14.8	638
35x12.50R17LT	121S	E	8.0-(10.0)-10.5	34.8	12.5	3195	-	65	-	RWL	C	E	75	15.6	602
37x13.50R17LT	128S	E	(8.5)-11.0	36.5	13.6	3970	-	80	-	RWL	D	C	75	16.3	572
33x12.50R18LT	118S	E	8.5-(10.0)-11.0	32.8	12.5	2910	-	65	-	RWL	C	E	75	14.9	638
35x12.50R18LT	123S	E	8.5-(10.0)-11.0	34.8	12.5	3415	-	65	-	RWL	-	-	-	15.7	602
33x12.50R20LT	114S	E	8.5-(10.0)-11.0	32.8	12.5	2600	-	65	-	RWL	C	E	75	15.1	638
35x12.50R20LT	121S	E	8.5-(10.0)-11.0	34.8	12.5	3195	-	65	-	RWL	C	E	75	15.9	602
33x12.50R22LT	109S	E	10.0-(10.5)-12.0	32.8	12.5	2270	-	65	-	RWL	C	E	75	15.3	638
35x12.50R22LT	117S	E	8.5-(10.0)-11.0	34.8	12.5	2835	-	65	-	RWL	C	E	75	16.1	602
33x12.50R24LT	106S	F	10.5-(11.5)-12.5	32.8	12.6	2095	-	80	-	RWL	C	E	75	15.5	638
35x12.50R24LT	116S	F	10.0-(10.5)-12.0	34.8	12.4	2755	-	80	-	RWL	C	E	75	16.3	602

SNOW LYNX

A/T

M+S



Studdable



PRODUCT PERFORMANCE

9.3



Rim Diameter ▾	Aspect Ratio ▾	Speed Rating ▾
16-22	70s-45s	Q/R/S



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD. RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	SIDE WALL	FE	WG	ERNIC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE	STUD SIZE
LT265/70R16	121/118R	E	7.0-(8.0)-9.0	30.6	10.7	3195	2910	80	RWL	E	C	74	14.2	683	13
LT265/65R17	120/117R	E	(8.0)-9.5	30.6	10.7	3085	2835	80	RWL	E	C	74	16.8	572	13
LT285/65R17	121/118R	E	(8.5)-10.0	31.6	11.5	3195	2910	80	RWL	E	C	74	14.7	662	13
LT265/70R17	123/120Q	E	7.0-(8.0)-9.0	31.7	10.7	3415	3085	80	RWL	E	C	76	16.8	572	13
LT275/70R17	124/121Q	E	7.0-(8.0)-9.0	32.2	11.0	3525	3195	80	RWL	E	C	76	13.8	698	13
LT285/70R17	126/123Q	E	7.5-(8.5)-9.5	32.8	11.5	3750	3415	80	RWL	E	C	76	14.9	634	13
LT315/70R17	126/123Q	E	8.0-(9.5)-10.5	34.4	12.7	3750	3415	65	RWL	E	C	76	15.6	604	13
LT265/60R18	119/116R	E	(8.0)-9.5	30.5	10.7	3000	2755	80	RWL	E	C	74	16.8	572	13
LT285/60R18	122/119R	E	(8.5)-10.0	31.5	11.5	3305	3000	80	RWL	E	C	76	14.7	665	13
LT255/65R18	120/117R	E	(7.5)-8.5-9	31.1	10.2	3085	2835	80	RWL	E	C	74	16.8	572	13
LT265/65R18	122/119R	E	(8.0)-9.5	31.5	10.7	3305	3000	80	RWL	E	C	76	16.8	572	13
LT275/65R18	123/120R	E	(8.0)-9.5	32.1	11.0	3415	3085	80	RWL	E	C	76	14.7	647	13
LT285/65R18	125/122R	E	(8.5)-10.0	32.6	11.5	3640	3305	80	RWL	E	C	76	15.0	652	13
LT325/65R18	127/124R	E	(9.5)-10.5-11.5	34.6	13.0	3860	3525	65	RWL	E	C	76	15.3	629	13
LT265/70R18	124/121Q	E	7.0-(8.0)-9.0	32.6	10.7	3525	3195	80	RWL	E	C	76	15.0	636	13
LT275/70R18	125/122Q	E	7.0-(8.0)-9.0	33.2	11.0	3640	3305	80	RWL	E	C	76	13.8	698	13
LT265/55R19	117/114R	E	7.5-(8.5)-9.5	30.5	10.9	2835	2600	80	RWL	E	C	74	16.8	572	13
LT275/55R19	119/116R	E	7.5-(8.5)-9.5	30.9	11.2	3000	2755	80	RWL	E	C	74	14.3	677	13
LT255/60R19	118/115R	E	7.0-(7.5)-9.0	31.1	10.2	2910	2680	80	RWL	E	C	74	16.8	572	13
LT275/45R20	112/109R	E	8.5-(9.0)-10.5	29.8	10.7	2470	2270	80	RBL	E	C	74	15.0	636	11
LT255/50R20	113/110R	E	7.0-(8.0)-9.0	30.1	10.4	2535	2335	80	RWL	E	C	7	13.9	691	11
LT265/50R20	115/112R	E	8.0-(8.5)-9.5	30.5	10.9	2680	2470	80	RWL	E	C	74	16.8	572	13
LT255/55R20	117/114R	E	7.0-(8.0)-9.0	31.0	10.4	2835	2600	80	RWL	E	C	74	16.8	572	13
LT275/55R20	120/117R	E	8.0-(8.5)-9.5	31.9	11.2	3085	2835	80	RWL	E	C	74	15.1	656	13
LT285/55R20	122/119R	E	8.5-(9.0)-10.0	32.4	11.7	3305	3000	80	RWL	E	C	76	15.0	652	13
LT275/60R20	123/120R	E	(8.0)-9.5	33.0	11.0	3415	3085	80	RWL	E	C	76	15.0	636	13
LT275/65R20	126/123R	E	(8.0)-9.5	34.1	11.0	3750	3415	80	RWL	E	C	76	15.8	609	13
LT265/45R21	111/108R	E	8.5-(9.0)-10.0	30.4	10.5	2405	2205	80	RBL	E	C	74	14.4	416	11
LT285/45R21	115/112R	E	9.0-(9.5)-10.5	31.1	11.2	2680	2470	80	RBL	E	C	74	13.9	436	11
LT275/50R21	122/119R	F	7.5-(8.5)-9.5	31.9	11.2	3305	3000	95	RWL	E	C	73	15.1	657	13
LT285/45R22	116/113R	E	9.0-(9.5)-10.5	32.1	11.2	2755	2535	80	RBL	E	C	74	15.0	652	11
LT275/50R22	119/116R	E	8.0-(8.5)-9.5	32.9	11.2	3000	2755	80	RWL	E	C	74	15.0	636	13
37x12.50R17LT	128Q	E	8-(10)-10.5	36.5	12.5	3970	-	65	RWL	E	C	76	16.8	572	13
33x12.50R20LT	114Q	E	8.5-(10.0)-11.0	32.5	12.5	2600	-	65	RWL	E	C	74	15.1	638	13
35x12.50R20LT	121Q	E	8.5-(10.0)-11.0	32.5	12.5	3195	-	65	RWL	E	C	74	15.9	602	13

RWL: Raised White Letters RBL: Raised Black Letters



RA2000 H/T



- ECONOMY
- HANDLING
- SILENCE
- WET TRACTION
- COMFORT

STRAIGHT RIB DESIGN

For enhancing driving stability and water dispersion.

MOLDED THOUSANDS OF SIPES

For equalizing tread blocks strength and riding comfort.


STRONG STRUCTURE

For stable driving and adding endurance capability.

CLOSED SHOULDER

For reducing shoulder wear and prolong tire mileage.

M+S

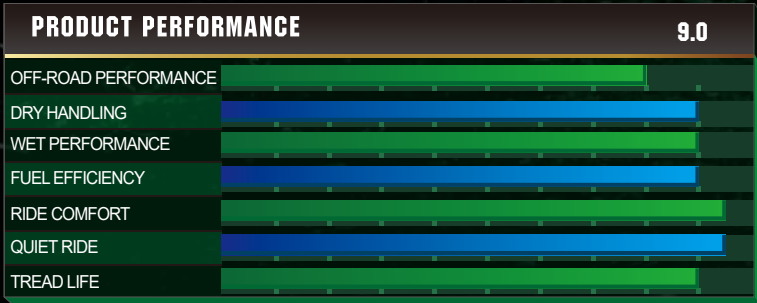

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
15-17	85s-60s	S/H	500/A/A

APPLICABLE MODELS



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLEMAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
235/75R15	105H	SL	6.0-(6.5)-8.0	28.9	9.3	2039	-	44	500AA	D	C	71	13.0	725
215/65R16	98H	SL	6.0-(6.5)-7.5	27.0	8.7	1653	-	44	500AA	D	C	71	12.4	774
215/70R16	100H	SL	5.5-(6.5)-7.0	27.9	8.7	1764	-	44	500AA	D	C	71	12.8	750
225/70R16	103H	SL	6.0-(6.5)-7.5	28.4	9.0	1929	-	44	500AA	D	C	71	13.0	736
235/70R16	106H	SL	6.0-(7.0)-8.0	29.0	9.4	2094	-	44	500AA	D	C	71	13.2	722
245/70R16	107H	SL	6.5-(7.0)-8.0	29.5	9.8	2149	-	44	500AA	D	C	71	13.4	708
255/70R16	111H	SL	6.5-(7.5)-8.5	30.1	10.2	2403	-	44	500AA	D	C	72	13.6	695
265/70R16	112H	SL	7.0-(8.0)-9.0	30.6	10.7	2469	-	44	500AA	D	C	72	13.9	683
235/60R17	106H	XL	6.5-(7.0)-8.5	28.1	9.4	2094	-	50	500AA	D	C	71	13.0	744
245/65R17	107H	SL	(7.0)-8.5	29.5	9.8	2149	-	44	500AA	D	C	71	13.5	708
265/65R17	112H	SL	7.5-(8.0)-9.5	30.6	10.7	2469	-	44	500AA	D	C	72	13.9	684
245/70R17	110H	SL	6.5-(7.0)-8.0	30.6	9.8	2337	-	44	500AA	D	C	71	13.9	684
265/70R17	115H	SL	7.0-(8.0)-9.0	31.7	10.7	2679	-	44	500AA	D	C	72	14.4	661
LT235/75R15	104/101S	C	6.0-(6.5)-8.0	28.9	9.3	1985	1820	51	-	D	C	71	13.0	725
LT225/75R16	115/112S	E	(6.0)-7.5	29.3	8.8	2680	2470	80	-	D	C	71	13.3	714
LT245/75R16	120/116S	E	6.5-(7.0)-8.0	30.5	9.8	3040	2780	80	-	D	C	71	13.8	686
LT265/75R16	123/120S	E	7.0-(7.5)-9.0	31.7	10.5	3415	3085	80	-	D	C	71	14.3	661
LT215/85R16	115/112S	E	5.5-(6.0)-7.0	30.4	8.5	2680	2470	80	-	D	C	71	13.7	688
LT235/85R16	120/116S	E	6.0-(6.5)-7.5	31.7	9.3	3040	2780	80	-	-	-	71	14.3	659
LT265/70R17	121/118S	E	7.0-(8.0)-9.0	31.7	10.7	3195	2910	80	-	D	C	71	14.4	661
LT245/75R17	121/118S	E	6.5-(7.0)-8.0	31.5	9.8	3195	2910	80	-	D	C	71	14.3	664
31x10.50R15LT	109S	C	7.0-(8.5)-9.0	30.5	10.6	2270	-	51	-	D	C	71	13.7	685



RA4100 SUV/CUV



ECONOMY



HANDLING



SILENCE



WET TRACTION



COMFORT

ASYMMETRIC TREAD DESIGN

For excellent riding comfort and precise handling on wet roads.

VARIOUS SIPINGS AND LATERAL GROOVES

For reducing pattern noise.


4 CIRCUMFERENTIAL GROOVES

For excellent water evacuation, minimizes the risk of aquaplaning.

SILIKA TREAD COMPOUND

For lower rolling resistance and better gripping.

M+S

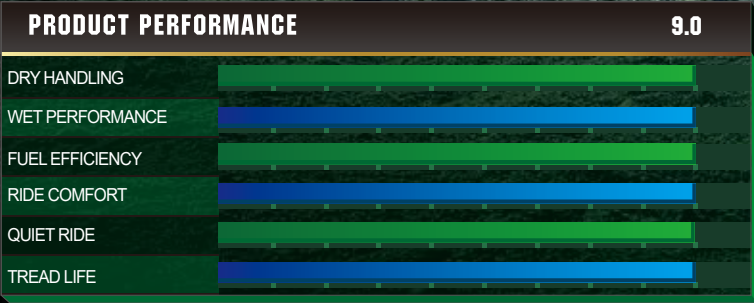

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
18-21	60s-35s	H/V/W/Y	320/A/A

APPLICABLE MODELS

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	STATIC LOADED RADIUS (IN.)	REVS PER MILE
245/50ZR18	104W	XL	7.0-(7.5)-8.5	27.7	10.0	1984	50	320AA	12.9	756
225/55ZR18	102W	XL	6.0-(7.0)-8.0	27.8	9.2	1874	50	320AA	12.9	753
255/55ZR18	109W	XL	7.0-(8.0)-9.0	29.0	10.4	2271	50	320AA	13.4	721
225/60R18	104H	XL	6.0-(6.5)-8.0	28.6	9.0	1984	50	320AA	13.3	731
245/60R18	105V	SL	(7.0)-8.5	29.6	9.8	2039	44	320AA	13.6	707
255/55ZR19	111W	XL	7.0-(8.0)-9.0	30.0	10.4	2403	50	320AA	13.9	696
245/40ZR20	99Y	XL	8.0-(8.5)-9.5	27.7	9.8	1709	50	320AA	13.1	754
275/40R20	106W	XL	9.0-(9.5)-11.0	28.7	10.9	2094	50	320AA	13.5	730
275/45ZR20	110W	XL	8.5-(9.0)-10.5	29.8	10.7	2337	50	320AA	13.9	703
265/50ZR20	111W	XL	7.5-(8.5)-9.5	30.5	10.9	2403	50	320AA	14.2	686
285/50ZR20	116W	XL	8.5-(9.0)-9.5	31.3	11.7	2756	50	320AA	14.5	669
275/55ZR20	117W	XL	7.5-(8.5)-9.5	31.9	11.2	2833	50	320AA	14.8	656
295/35ZR21	107W	XL	10.0-(10.5)-11.5	29.1	11.9	2149	50	320AA	13.7	719



RA 760 UHP

EV READY
Silent TECH

HANDLING

SILENCE

WET TRACTION

BRAKING

SILICA

40K MILEAGE WARRANTY

ASYMMETRIC TREAD PATTERN DESIGN:

Four main grooves and multiply chamfer designed, speed up draining process. Improve tire anti slip and braking performance on wet road conditions. Tire evenly re-shape by reinforcement inner sidewall on tire shoulder combine with connecting key, highly increased torsional stiffness, provided powerful steering brace and excellent performance on dry or wet ground. Wide and firm shoulder block achieved minimum deformation during process of starting, braking and turning, enhance steering sensitivity, upgrade safety level, diminish abnormal abrasion.

Optimized 3 tread arcs design based on bionics enlarged tire ground contact area when turning in highspeed conditions, providing more powerful braced and grip force, to achieve more evenly abrasion.

SIDE GROOVE TECHNOLOGY:

side groove design on shoulder, in which the groove becomes wider towards the end, is applied to the shoulder of the tire to lower the pumping sound and maintain drainage.


KNURLING (LATERAL GROOVE) TECHNOLOGY:

Placing the knurled structure on the main vertical groove can reduce the air passage and effectively reduce the tread pattern noise during road contact.

Optimized multiply pitches and sequence, significantly reduced noise level.

Composed with High content of silica and eco-friendly materials, combined with low-temperature consistent mixture technology, fit with weight reduction demand, and reduce rolling-resistance level, moreover, provides excellent long mileage.

M+S

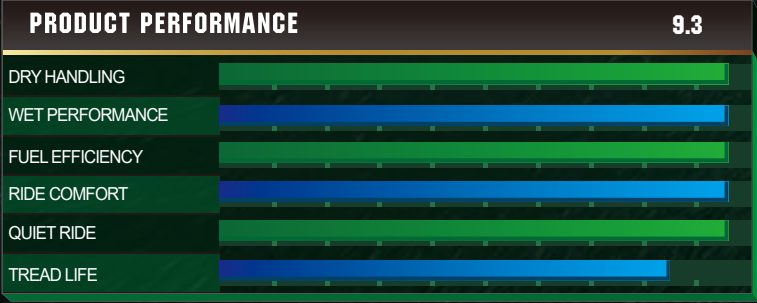

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
15-22	65s-35s	H/V/W	400/ A/A

APPLICABLE MODELS



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
195/55R15	85V	SL	5.5-(6.0)-7.0	23.4	7.9	1135	44	400AA	C	B	71	10.8	887
195/60R15	88V	SL	5.5-(6.0)-7.0	24.2	7.9	1235	44	400AA	C	B	71	11.1	858
185/65R15	88H	SL	5.0-(5.5)-6.5	24.4	7.4	1235	44	400AA	C	B	70	11.2	850
195/65R15	91V	SL	5.5-(6.0)-7.0	25.0	7.9	1356	44	400AA	C	B	71	11.4	831
205/65R15	94H	SL	5.5-(6.0)-7.5	25.5	8.2	1477	44	400AA	C	B	72	11.6	816
205/70R15	96H	SL	5.0-(6.0)-7.0	26.3	8.2	1565	44	400AA	C	B	71	11.9	789
195/45R16	84V	XL	6.0-(6.5)-7.5	22.9	7.7	1102	50	400AA	C	B	71	10.7	907
215/45ZR16	90W	XL	(7)-7.5-8	24.5	8.4	1323	50	400AA	C	B	72	11.7	919
185/55R16	87V	XL	5-(6)-6.5	24.9	7.6	1201	50	400AA	C	B	72	11.1	906
195/55R16	91V	XL	5.5-(6.0)-7.0	24.4	7.9	1356	50	400AA	C	B	71	11.3	851
205/55ZR16	94W	XL	5.5-(6.5)-7.5	24.9	8.4	1477	50	400AA	C	B	71	11.5	835
215/55ZR16	97W	XL	6.0-(7.0)-7.5	25.3	8.9	1609	50	400AA	C	B	71	11.6	822
195/60R16	89H	SL	5.5-(6.0)-7.0	25.2	7.9	1279	44	400AA	C	B	71	11.6	824
205/60R16	92V	SL	5.5-(6.0)-7.5	25.7	8.2	1389	44	400AA	C	B	71	11.8	809
215/60R16	99V	XL	6.0-(6.5)-7.5	26.1	8.7	1709	50	400AA	C	B	71	12.0	795
225/60R16	102V	XL	6.0-(6.5)-8.0	26.6	9.0	1874	50	400AA	C	B	71	12.1	781
205/65R16	95H	SL	5.5-(6.0)-7.5	26.5	8.2	1521	44	400AA	C	B	72	12.1	785
215/65R16	98H	SL	6.0-(6.5)-7.5	27.0	8.7	1653	44	400AA	C	B	71	12.3	769
185/35R17	82V	XL	6.0-(6.5)-7.5	22.1	7.4	1047	50	400AA	C	B	71	10.5	939
165/40R17	72V	XL	(6.0)	22.2	6.7	785	50	400AA	-	-	-	10.5	936
195/40R17	81V	XL	6.5-(7.0)-7.5	23.1	7.9	1020	50	400AA	C	B	71	10.9	897
205/40ZR17	84W	XL	7.0-(7.5)-8.0	23.5	8.3	1102	50	400AA	C	B	71	11.0	885
215/40ZR17	87W	XL	7.0-(7.5)-8.5	23.8	8.6	1201	50	400AA	C	B	71	11.1	874
255/40ZR17	98W	XL	8.5-(9.0)-10.0	25.0	10.2	1653	50	400AA	C	B	72	11.7	830
195/45ZR17	85W	XL	6.0-(6.5)-7.5	23.9	7.7	1135	50	400AA	C	B	71	11.2	868
215/45ZR17	91W	XL	(7.0)-8.0	24.6	8.4	1356	50	400AA	C	B	71	11.5	843
225/45ZR17	94W	XL	7.0-(7.5)-8.5	25.0	8.9	1477	50	400AA	C	B	71	11.6	832
235/45ZR17	97W	XL	7.5-(8.0)-9.0	25.4	9.3	1609	50	400AA	C	B	71	11.8	819
205/50ZR17	93W	XL	5.5-(6.5)-7.5	25.1	8.4	1433	50	400AA	C	B	71	11.7	827
215/50ZR17	95W	XL	6.0-(7.0)-7.5	25.5	8.9	1521	50	400AA	C	B	71	11.8	814
225/50ZR17	98W	XL	6.0-(7.0)-8.0	25.9	9.2	1653	50	400AA	C	B	71	12.0	802
205/55ZR17	95W	XL	5.5-(6.5)-7.5	25.9	8.4	1521	50	400AA	C	B	71	12.0	802
215/55ZR17	98W	XL	6.0-(7.0)-7.5	26.3	8.9	1653	50	400AA	C	B	71	12.1	790
215/55ZR17	94W	SL	6.0-(7.0)-7.5	26.3	8.9	1477	44	400AA	C	B	71	12.1	790
225/55ZR17	101W	XL	6.0-(7.0)-8.0	26.8	9.2	1819	50	400AA	C	B	71	12.3	776
235/55ZR17	103W	XL	6.5-(7.5)-8.5	27.2	9.6	1929	50	400AA	C	B	71	12.5	765
215/60R17	96H	SL	6.0-(6.5)-7.5	27.2	8.7	1565	44	400AA	C	B	70	12.5	765
225/60R17	99H	SL	6.0-(6.5)-8.0	27.6	9.0	1709	44	400AA	C	B	70	12.6	752
215/65R17	99H	SL	6.0-(6.5)-7.5	28.0	8.7	1709	44	400AA	C	B	70	12.8	741
225/65R17	102H	SL	6.0-(6.5)-8.0	28.5	9.0	1874	44	400AA	C	B	70	13.0	729
235/65R17	104H	SL	6.5-(7.0)-8.5	29.1	9.4	1984	44	400AA	C	B	70	13.2	715



APPLICABLE MODELS



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
265/65R17	112H	SL	7.5-(8.0)-9.5	30.6	10.7	2469	44	400AA	C	B	71	13.8	680
195/35ZR18	88W	XL	6.5-(7.0)-7.5	23.3	7.9	1235	50	400AA	C	B	71	11.1	890
245/45ZR18	100W	XL	7.5-(8.0)-9.0	26.7	9.6	1764	50	400AA	C	B	71	12.6	784
235/50R18	101V	XL	6.5-(7.5)-8.5	27.3	9.6	1819	50	400AA	C	B	71	12.9	768
245/50ZR18	104W	XL	7.0-(7.5)-8.5	27.7	10.0	1984	50	400AA	C	B	71	13.1	757
215/55R18	99V	XL	6.0-(7.0)-7.5	27.3	8.9	1709	50	400AA	C	B	71	12.9	766
235/65R18	106V	SL	6.5-(7.0)-8.5	30.0	9.4	2094	44	400AA	C	B	71	14.1	697
185/35R18	83V	XL	6.0-(6.5)-7.5	23.1	7.4	1074	50	400AA	C	B	71	11.0	899
205/35R18	81V	XL	(7.5)	23.7	8.3	1020	50	400AA	C	B	71	11.2	878
245/35ZR18	92Y	XL	8.0-(8.5)-9.5	25.7	9.8	1389	50	400AA	C	B	72	11.7	784
165/40R18	73V	XL	5.5-(6.0)-6.5	23.2	6.7	805	50	400AA	-	-	-	11.0	896
205/40R18	86W	XL	7.0-(7.5)-8.0	24.4	8.3	1170	50	400AA	C	B	71	11.5	850
225/40ZR18	92W	XL	7.5-(8.0)-9.0	25.1	9.1	1389	50	400AA	C	B	71	11.8	828
235/40ZR18	95W	XL	8.0-(8.5)-9.5	25.4	9.5	1521	50	400AA	C	B	71	11.9	818
235/45ZR18	98W	XL	7.5-(8.0)-9.0	26.3	9.3	1653	50	400AA	C	B	71	12.2	789
215/50ZR18	92W	SL	6.0-(7.0)-7.5	26.5	8.9	1389	44	400AA	C	B	70	12.3	784
225/50ZR18	99W	XL	6.0-(7.0)-8.0	26.9	9.2	1709	50	400AA	C	B	71	12.5	773
225/55ZR18	102W	XL	6.0-(7.0)-8.0	27.8	9.2	1874	50	400AA	C	B	71	12.8	748
235/55R18	104V	XL	6.5-(7.5)-8.5	28.1	9.6	1984	50	400AA	C	B	71	13.0	738
225/60R18	104H	XL	6.0-(6.5)-8.0	28.6	9.0	1984	50	400AA	C	B	71	13.1	726
235/60R18	107H	XL	6.5-(7.0)-8.5	29.1	9.4	2149	50	400AA	C	B	71	13.3	714
265/60R18	110H	SL	7.5-(8.0)-9.5	30.5	10.7	2337	44	400AA	C	B	71	13.9	681
235/40ZR19	96W	XL	8.0-(8.5)-9.5	26.4	9.5	1565	50	400AA	C	B	71	12.6	792
225/45ZR19	96W	XL	7.0-(7.5)-8.5	27.0	8.9	1565	50	400AA	C	B	71	12.8	775
235/50ZR19	103W	XL	6.5-(7.5)-8.5	28.3	9.6	1929	50	400AA	C	B	71	13.4	740
225/35ZR19	88W	XL	7.5-(8.0)-9.0	25.2	9.1	1235	50	400AA	C	B	71	11.9	823
255/35ZR19	96Y	XL	8.5-(9.0)-10.0	27.0	10.2	1565	50	400AA	C	B	72	12.3	804
225/40ZR19	93W	XL	7.5-(8.0)-9.0	26.1	9.1	1433	50	400AA	C	B	71	12.3	796
245/40ZR19	98W	XL	8.0-(8.5)-9.5	26.7	9.8	1653	50	400AA	C	B	71	12.5	777
255/40ZR19	100W	XL	8.5-(9.0)-10.0	27.0	10.2	1764	50	400AA	C	B	72	12.6	768
235/45ZR19	99W	XL	7.5-(8.0)-9.0	27.4	9.3	1709	50	400AA	C	B	71	12.8	759
245/45ZR19	102W	XL	7.5-(8.0)-9.0	27.7	9.6	1874	50	400AA	C	B	71	12.9	751
255/45ZR19	104W	XL	8.0-(8.5)-9.5	28.1	10.0	1984	50	400AA	C	B	72	13.0	740
245/50R19	105V	XL	7.0-(7.5)-8.5	28.7	10.0	2039	50	400AA	C	B	71	13.3	724
255/50R19	107V	XL	7.0-(8.0)-9.0	29.1	10.4	2149	50	400AA	C	B	72	13.4	714
205/55R19	97V	XL	6-(6.5)-7.5	28.9	8.4	1609	50	400AA	C	B	72	13.0	777
225/55R19	103V	XL	6.0-(7.0)-8.0	28.8	9.2	1929	50	400AA	C	B	71	13.3	722
235/55R19	105V	XL	6.5-(7.5)-8.5	29.2	9.6	2039	50	400AA	C	B	71	13.5	712
255/55R19	111V	XL	7.0-(8.0)-9.0	30.0	10.4	2403	50	400AA	C	B	72	13.8	692
255/55R20	110V	XL	7.0-(8.0)-9.0	31.0	10.4	2337	50	400AA	C	B	72	14.7	674
215/30ZR20	83W	XL	(7.5)	25.1	8.6	1074	50	400AA	C	B	71	12.0	827

APPLICABLE MODELS



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
225/30ZR20	85W	XL	(8.0)	25.4	9.1	1135	50	400AA	C	B	71	12.1	819
235/30ZR20	88W	XL	(8.5)	25.6	9.5	1235	50	400AA	C	B	71	12.2	812
225/35ZR20	90W	XL	7.5-(8.0)-9.0	26.2	9.1	1323	50	400AA	C	B	71	12.4	792
245/40ZR20	99W	XL	8.0-(8.5)-9.5	27.7	9.8	1709	50	400AA	C	B	71	13.0	749
255/40ZR20	101W	XL	8.5-(9.0)-10.0	28.0	10.2	1819	50	400AA	C	B	72	13.1	741
305/40R20	112V	XL	10.0-(11.0)-12.0	29.6	12.3	2469	50	400AA	C	B	74	13.7	702
235/45ZR20	100W	XL	7.5-(8.0)-9.0	28.3	9.3	1764	50	400AA	C	B	71	13.3	733
245/45ZR20	103W	XL	7.5-(8.0)-9.0	28.7	9.6	1929	50	400AA	C	B	71	13.4	725
255/45ZR20	105W	XL	8.0-(8.5)-9.5	29.1	10.0	2039	50	400AA	C	B	72	13.5	715
265/45ZR20	108W	XL	8.5-(9.0)-10.0	29.4	10.5	2205	50	400AA	C	B	72	13.7	707
275/45R20	110V	XL	8.5-(9.0)-10.5	29.8	10.7	2337	50	400AA	C	B	72	13.8	698
235/50R20	104V	XL	6.5-(7.5)-8.5	29.3	9.6	1984	50	400AA	C	B	71	13.6	709
255/50R20	109V	XL	7.0-(8.0)-9.0	30.1	10.4	2271	50	400AA	C	B	72	13.9	691
245/35ZR21	96W	XL	8.0-(8.5)-9.5	27.8	9.8	1565	50	400AA	C	B	71	13.4	754
265/35ZR21	101W	XL	9.0-(9.5)-10.5	28.3	10.7	1819	50	400AA	C	B	72	13.6	739
265/45ZR21	108W	XL	8.5-(9.0)-10.0	30.4	10.5	2205	50	400AA	C	B	72	14.4	688
265/40R22	106V	XL	9.0-(9.5)-10.5	30.4	10.7	2094	50	400AA	C	B	72	14.3	684

RA630 H/P EV READY



ECONOMY

HIGH MILEAGE

WET TRACTION

SLIENCE

ASYMMETRIC TREAD PATTERN:

Three main widen grooves , speed up draining process, Improve tire anti slip and braking performance on wet road conditions.Wide and firm shoulder block achieved minimum deformation during process of starting, braking and turning, enhance steering sensitivity, upgrade safety level, diminish abnormal abrasion.

Optimized 3 tread arcs design based on bionics enlarged tire ground contact area when turning in highspeed conditions, providing more powerful braced and grip force, to achieve more evenly abrasion.

KNURLING (LATERAL GROOVE) TECHNOLOGY:

Placing the knurled structure on the main vertical groove can reduce the air passage and effectively reduce the tread pattern noise during road contact.

EXCELLENT FUEL EFFICIENCY AND LONG MILEAGE:


Optimized structure and tread design, high content of silica compound, combined with low-tem- perature consistent mixture technology, fit with weight reduction demand, and reduce rolling-resistance level, moreover , provides excellent long mileage.

Optimized multiply pitches and sequence ,significantly reduced noise level.

SIDE GROOVE TECHNOLOGY:

Side groove design on shoulder, in which the groove becomes wider towards the end, is applied to the shoulder of the tire to lower the pumping sound and maintain drainage.

M+S

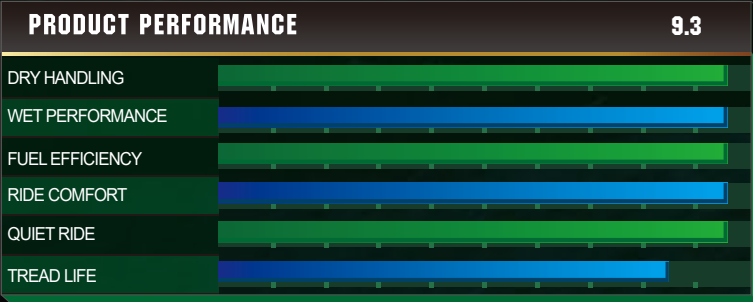

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
12-15	80s-50s	T/H	400/A/A

APPLICABLE MODELS

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
155/70R13	75T	XL	4.0-(4.5)-5.0	21.6	6.2	853	44	400AA	C	C	70	9.9	969
175/75R13	85T	SL	4.5-(5.0)-6.0	23.3	7.0	1135	44	400AA	C	C	70	10.5	891
165/70R14	81H	XL	4.0-(5.0)-5.5	23.1	6.7	1019	44	400AA	C	C	70	10.7	903
175/70R14	84T	XL	4.5-(5.0)-6.0	23.7	7.0	1102	44	400AA	C	C	70	10.9	882
175/75R14	86T	SL	4.5-(5.0)-6.0	24.3	7.0	1168	44	400AA	C	C	70	11.0	854
185/70R14	88H	SL	4.5-(5.5)-6.0	24.3	7.4	1234	44	400AA	C	C	70	11.0	857

RA 710 UHP



HANDLING



SILENCE



WET TRACTION



BRAKING



SILICA

ASYMMETRIC
TREAD DESIGN

Outside:
Strong shoulder for
smooth turning.

Inside:
Multi-sipes for excell-
ent wet gripping

WIDER CENTER RIB

For driving stability
on the straight line road.

3+1 LONGITUDINAL
GROOVES

For excellent water
drainage in wet
conditions.

VARIABLE PITCH
DESIGN

For reducing noise and
improving gripping on
both dry and wet
road conditions.

M+S

PRODUCT PERFORMANCE

9.0

DRY HANDLING	
WET PERFORMANCE	
FUEL EFFICIENCY	
RIDE COMFORT	
QUIET RIDE	
TREAD LIFE	

Rim Diameter ▾

16-21

Aspect Ratio ▾

55s-35s

Speed Rating ▾

V/W/Y

UTQG ▾

380/A/A

APPLICABLE
MODELS

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
195/45R16	84V	XL	6.0-(6.5)-7.5	22.9	7.7	1102	50	380AA	D	B	69	10.7	913
205/45R16	83V	SL	6.5-(7.0)-7.5	23.2	8.1	1074	44	380AA	D	B	69	10.9	900
185/50R16	81V	SL	5.0-(6.0)-6.5	23.3	7.6	1019	44	380AA	D	B	68	10.9	897
195/50R16	84V	SL	5.5-(6.0)-7.0	23.7	7.9	1102	44	380AA	D	B	69	11.1	882
205/50R16	87W	SL	5.5-(6.5)-7.5	24.1	8.4	1201	44	380AA	D	B	69	11.2	868
205/55R16	91V	SL	5.5-(6.5)-7.5	24.9	8.4	1356	44	380AA	D	B	69	11.5	840
215/55R16	97V	XL	6.0-(7.0)-7.5	25.3	8.9	1609	50	380AA	D	B	69	11.7	827
215/55R16	97W	XL	6.0-(7.0)-7.5	25.3	8.9	1609	50	380AA	D	B	69	11.7	827
225/55R16	99W	XL	6.0-(7.0)-8.0	25.7	9.2	1709	50	380AA	D	B	70	11.9	812
195/40ZR17	81W	XL	6.5-(7.0)-7.5	23.1	7.9	1019	50	380AA	D	B	70	10.9	903
205/40ZR17	84W	XL	7.0-(7.5)-8.0	23.5	8.3	1102	50	380AA	D	B	69	11.1	891
205/45R17	88W	XL	6.5-(7.0)-7.5	24.3	8.1	1235	50	380AA	D	B	69	11.4	862
215/45ZR17	91W	XL	(7.0)-8.0	24.6	8.4	1356	50	380AA	D	B	69	11.6	848
225/45ZR17	94W	XL	7.0-(7.5)-8.5	25.0	8.9	1477	50	380AA	D	B	69	11.7	838
235/45ZR17	97W	XL	7.5-(8.0)-9.0	25.4	9.3	1609	50	380AA	D	B	69	11.9	825
245/45ZR17	99W	XL	7.5-(8.0)-9.0	25.7	9.6	1709	50	380AA	D	B	69	12.0	815
255/45ZR17	102W	XL	8.0-(8.5)-9.5	26.1	10.0	1874	50	380AA	D	B	70	12.1	802
205/50R17	93W	XL	5.5-(6.5)-7.5	25.1	8.4	1433	50	380AA	D	B	69	11.7	832
215/50R17	95W	XL	6.0-(7.0)-7.5	25.5	8.9	1521	50	380AA	D	B	69	11.9	820
225/50R17	98W	XL	6.0-(7.0)-8.0	25.9	9.2	1653	50	380AA	D	B	69	12.0	807
235/50R17	100W	XL	6.5-(7.5)-8.5	26.3	9.6	1764	50	380AA	D	B	69	12.2	795
205/55R17	95W	XL	5.5-(6.5)-7.5	25.9	8.4	1521	50	380AA	D	B	69	12.0	807
215/55R17	98W	XL	6.0-(7.0)-7.5	26.3	8.9	1653	50	380AA	D	B	69	12.2	795
225/55R17	101W	XL	6.0-(7.0)-8.0	26.8	9.2	1819	50	380AA	D	B	69	12.4	781
235/55R17	103W	XL	6.5-(7.5)-8.5	27.2	9.6	1929	50	380AA	D	B	69	12.6	770
215/35ZR18	84W	XL	7.0-(7.5)-8.5	23.9	8.6	1102	50	380AA	D	B	70	11.4	875
255/35ZR18	94Y	XL	8.5-(9.0)-10.0	25.0	10.2	1477	50	380AA	D	B	71	11.8	836
205/40ZR18	86W	XL	7.0-(7.5)-8.0	24.4	8.3	1168	50	380AA	D	B	69	11.6	855
215/40ZR18	89W	XL	7.0-(7.5)-8.5	24.8	8.6	1279	50	380AA	D	B	69	11.7	844
225/40ZR18	92W	XL	7.5-(8.0)-9.0	25.1	9.1	1389	50	380AA	D	B	69	11.9	834
235/40ZR18	95W	XL	8.0-(8.5)-9.5	25.4	9.5	1521	50	380AA	D	B	69	12.0	823
245/40ZR18	97W	XL	8.0-(8.5)-9.5	25.7	9.8	1609	50	380AA	D	B	69	12.1	813
255/40ZR18	99W	XL	8.5-(9.0)-10.0	26.0	10.2	1709	50	380AA	D	B	70	12.2	804
215/45ZR18	93W	XL	(7.0)-8.0	25.6	8.4	1433	50	380AA	D	B	69	12.0	816
225/45ZR18	95W	XL	7.0-(7.5)-8.5	25.9	8.9	1521	50	380AA	D	B	69	12.2	806
235/45ZR18	98W	XL	7.5-(8.0)-9.0	26.3	9.3	1653	50	380AA	D	B	69	12.3	794
245/45ZR18	100W	XL	7.5-(8.0)-9.0	26.7	9.6	1764	50	380AA	D	B	69	12.5	785
255/45ZR18	103W	XL	8.0-(8.5)-9.5	27.0	10.0	1929	50	380AA	D	B	70	12.6	773
295/30ZR19	100W	XL	(10.5)	26.0	11.9	1764	50	380AA	D	B	71	12.3	804
235/35ZR19	91W	XL	8.0-(8.5)-9.5	25.5	9.5	1356	50	380AA	D	B	70	12.1	821
245/35ZR19	93W	XL	8.0-(8.5)-9.5	25.8	9.8	1433	50	380AA	D	B	69	12.2	811
255/35ZR19	96Y	XL	8.5-(9.0)-10.0	26.0	10.2	1565	50	380AA	D	B	71	12.3	804
275/35ZR19	96Y	SL	9.0-(9.5)-11.0	26.6	10.9	1565	44	380AA	D	B	70	12.5	787
225/40ZR19	93W	XL	7.5-(8.0)-9.0	26.1	9.1	1433	50	380AA	D	B	69	12.4	801
235/40ZR19	96W	XL	8.0-(8.5)-9.5	26.4	9.5	1565	50	380AA	D	B	69	12.5	792
245/40ZR19	98W	XL	8.0-(8.5)-9.5	26.7	9.8	1653	50	380AA	D	B	69	12.6	782
255/40ZR19	100Y	XL	8.5-(9.0)-10.0	27.0	10.2	1764	50	380AA	D	B	71	12.7	773
275/40ZR19	105W	XL	9.0-(9.5)-11.0	27.7	10.9	2039	50	380AA	D	B	70	13.0	756
245/45ZR19	102W	XL	7.5-(8.0)-9.0	27.7	9.6	1874	50	380AA	D	B	69	13.0	756
255/50R19	107W	XL	7.0-(8.0)-9.0	29.1	10.4	2149	50	380AA	D	B	70	13.5	719
225/55R19	103W	XL	6.0-(7.0)-8.0	28.8	9.2	1929	50	380AA	D	B	70	13.4	727
235/55R19	105W	XL	6.5-(7.5)-8.5	29.2	9.6	2039	50	380AA	D	B	70	13.6	717
245/55R19	107W	XL	7.0-(7.5)-8.5	29.6	10.0	2149	50	380AA	D	B	70	13.8	705
225/30ZR20	85W	XL	(8.0)	25.4	9.1	1135	50	380AA	D	B	70	12.1	825
275/30ZR20	97Y	XL	(9.5)	26.5	10.9	1609	50	380AA	D	B	71	12.6	788
245/35ZR20	95W	XL	8.0-(8.5)-9.5	26.8	9.8	1521	50	380AA	D	B	69	12.7	781
255/35ZR20	97W	XL	8.5-(9.0)-10.0	27.0	10.2	1609	50	380AA	D	B	70	12.8	774
295/40ZR21	111W	XL	10.0-(10.5)-11.5	30.3	11.9	2403	50	380AA	D	B	74	14.2	691
275/45ZR21	110W	XL	8.5-(9.0)-10.5	30.7	10.7	2337	50	380AA	D	B	71	14.4	680



RA 720 UHP



- HANDLING
- SILENCE
- WET TRACTION
- BRAKING
- SILICA

UNI-DIRECTIONAL TREAD DESIGN

For driving stability and minimizing the risk of aquaplaning.

NEW SHOULDER DESIGN:

Adopted two wide shoulder grooves for stopping shoulder irregular wear and reducing noise level.


4+2 CIRCUMFERENTIAL GROOVES

For excellent water drainage in the wet road conditions.

SILICA COMPOUND

For better gripping on both dry and wet road conditions.

M+S

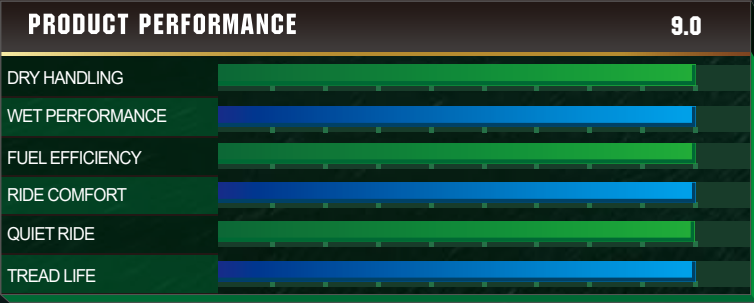

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
22-28	45s -25s	W/Y	420/A/A

APPLICABLE MODELS



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	STATIC LOADED RADIUS (IN.)	REVS PER MILE
295/25ZR22	97Y	XL	10.0-(10.5)-11.0	27.8	11.9	1609	50	420AA	13.3	751
245/30ZR22	92W	XL	8.0-(8.5)-9.0	27.8	9.8	1389	50	420AA	13.3	751
295/30ZR22	103Y	XL	(10.5)	29.0	11.9	1929	50	420AA	13.8	721
245/35ZR22	97W	XL	8.0-(8.5)-9.5	28.8	9.8	1609	50	420AA	13.7	727
265/35ZR22	102W	XL	9.0-(9.5)-10.5	29.3	10.7	1874	50	420AA	13.9	713
245/40ZR22	101W	XL	8.0-(8.5)-9.5	29.7	9.8	1819	50	420AA	14.1	704
305/40ZR22	114W	XL	10.0-(11.0)-12.0	31.6	12.3	2601	50	420AA	14.8	661
305/45ZR22	118W	XL	9.5-(10.0)-11.5	32.8	11.9	2910	50	420AA	15.3	638
275/25ZR24	96Y	XL	(10.0)	29.4	11.1	1565	50	420AA	14.2	710
255/30ZR24	97W	XL	8.5-(9.0)-9.5	30.1	10.2	1609	50	420AA	14.4	695
295/35ZR24	110W	XL	10.0-(10.5)-11.5	32.1	11.9	2337	50	420AA	15.2	651
305/35ZR24	112W	XL	10.0-(11.0)-12.0	32.4	12.3	2469	50	420AA	15.4	645
275/25ZR26	98W	XL	(10.0)-11.0	31.4	11.1	1653	50	420AA	15.2	666
295/30ZR26	107W	XL	(10.5)	33.0	11.9	2149	50	420AA	15.8	634
305/30ZR26	109W	XL	10.5-(11.0)-11.5	33.2	12.3	2271	50	420AA	15.9	629
295/25ZR28	103Y	XL	10.0-(10.5)-11.0	33.8	11.9	1929	50	420AA	16.3	618
305/25ZR28	105Y	XL	10.5-(11.0)-11.5	34.0	12.2	2039	50	420AA	16.4	615
325/30ZR28	115Y	XL	(11.5)	35.7	13.0	2679	50	420AA	17.1	586

RASIO H/P



4 WIDE LONGITUDINAL GROOVES

For good water drainage and ensure the safety on wet road conditions.

OPTIMIZED ROAD CONTACT SHAPE

For reducing rolling resistance and prolongs mileage.

VARIABLE PITCH AND OPTIMIZED GROOVE ANGLE

For reducing tire noise.


SILICA COMPOUND

For improving gripping on wet road conditions.

M+S

PRODUCT PERFORMANCE

9.0

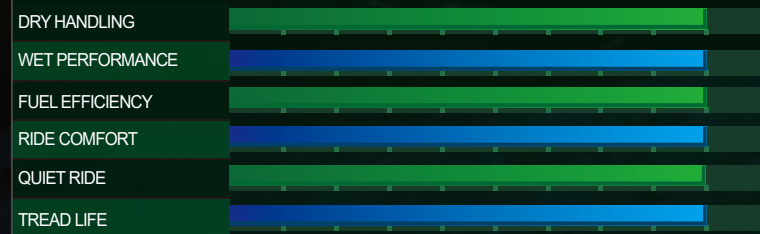

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
13-16	80s-50s	T/H/V/W	440/A/A



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	SIDE WALL	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
175/60R13	77H	SL	(5.0)-6.0	21.3	7.0	908	44	-	440AA	D	B	69	9.7	977
165/65R13	77T	SL	4.5-(5.0)-6.0	21.4	6.7	908	44	-	440AA	D	B	70	9.8	970
185/70R13	86H	SL	4.5-(5.5)-6.0	23.2	7.4	1168	44	-	440AA	D	B	69	10.5	894
175/75R13	85T	SL	4.5-(5.0)-6.0	23.3	7.0	908	44	-	440AA	D	B	70	10.9	891
155/80R13	79T	SL	4.0-(4.5)-5.0	22.8	6.2	963	44	-	440AA	D	B	70	10.3	913
185/60R14	82H	SL	5.0-(5.5)-6.5	22.8	7.4	1047	44	-	440AA	D	B	69	10.4	913
195/60R14	86H	SL	5.5-(6.0)-7.0	23.2	7.9	1168	44	-	440AA	D	B	69	10.6	894
205/60R14	88H	SL	5.5-(6.0)-7.5	23.7	8.2	1235	44	RWL	440AA	D	B	70	10.8	876
235/60R14	96H	SL	6.5-(7.0)-8.5	25.1	9.4	1565	44	RWL	440AA	D	B	71	11.3	827
185/65R14	86H	SL	5.0-(5.5)-6.5	23.5	7.4	1168	44	-	440AA	D	B	69	10.7	885
195/65R14	89H	SL	5.5-(6.0)-7.0	24.0	7.9	1279	44	-	440AA	D	B	69	10.9	865
185/70R14	88H	SL	4.5-(5.5)-6.0	24.3	7.4	1235	44	-	440AA	D	B	69	11.0	857
195/70R14	91H	SL	5.0-(6.0)-6.5	24.8	7.9	1356	44	-	440AA	D	B	69	11.2	838
205/70R14	95H	SL	5.0-(6.0)-7.0	25.4	8.2	1521	44	-	440AA	D	B	69	11.4	819
215/70R14	96H	SL	5.5-(6.5)-7.0	25.9	8.7	1565	44	-	440AA	D	B	69	11.7	802
195/50R15	82V	SL	5.5-(6.0)-7.0	22.7	7.9	1047	44	-	440AA	D	B	69	10.5	914
205/50R15	86V	SL	5.5-(6.5)-7.5	23.1	8.4	1168	44	-	440AA	D	B	69	10.7	899
185/55R15	82V	SL	5.0-(6.0)-6.5	23.0	7.6	1047	44	-	440AA	D	B	69	10.6	902
195/55R15	85V	SL	5.5-(6.0)-7.0	23.4	7.9	1135	44	-	440AA	D	B	69	10.8	887
205/55R15	88V	SL	5.5-(6.5)-7.5	23.9	8.4	1235	44	-	440AA	D	B	69	11.0	869
185/60R15	84H	SL	5.0-(5.5)-6.5	23.7	7.4	1102	44	-	440AA	D	B	69	10.9	875
195/60R15	88H	SL	5.5-(6.0)-7.0	24.2	7.9	1235	44	RWL	440AA	D	B	69	11.1	858
205/60R15	91V	SL	5.5-(6.0)-7.5	24.7	8.2	1356	44	RWL	440AA	D	B	69	11.3	842
215/60R15	94H	SL	6.0-(6.5)-7.5	25.2	8.7	1477	44	-	440AA	D	B	69	11.5	826
225/60R15	96V	SL	6.0-(6.5)-8.0	25.6	9.0	1565	44	-	440AA	D	B	69	11.7	811
235/60R15	98H	SL	6.5-(7.0)-8.5	26.1	9.4	1653	44	-	440AA	D	B	71	11.8	796
185/65R15	88H	SL	5.0-(5.5)-6.5	24.4	7.4	1235	44	-	440AA	D	B	69	11.2	850
195/65R15	91H	SL	5.5-(6.0)-7.0	25.0	7.9	1356	44	-	440AA	D	B	69	11.4	831
205/65R15	94H	SL	5.5-(6.0)-7.5	25.5	8.2	1477	44	-	440AA	D	B	69	11.6	816
215/65R15	96H	SL	6.0-(6.5)-7.5	26.0	8.7	1565	44	-	440AA	D	B	69	11.8	798
205/70R15	96H	SL	5.0-(6.0)-7.0	26.3	8.2	1565	44	-	440AA	D	B	69	11.9	789
215/70R15	98H	SL	5.5-(6.5)-7.0	26.9	8.7	1653	44	-	440AA	D	B	69	12.1	773
195/55R16	87V	SL	5.5-(6.0)-7.0	24.4	7.9	1201	44	-	440AA	D	B	69	11.3	851
205/55R16	91V	SL	5.5-(6.5)-7.5	24.9	8.4	1356	44	-	440AA	D	B	69	11.5	835
205/55R16	94W	XL	5.5-(6.5)-7.5	24.9	8.4	1477	50	-	440AA	D	B	71	11.5	835
195/60R16	89H	SL	5.5-(6.0)-7.0	25.2	7.9	1279	44	-	440AA	D	B	69	11.6	824
205/60R16	92V	SL	5.5-(6.0)-7.5	25.7	8.2	1389	44	-	440AA	D	B	69	11.8	809
215/60R16	99V	XL	6.0-(6.5)-7.5	26.1	8.7	1709	50	-	440AA	D	B	70	12.0	795
225/60R16	98H	SL	6.0-(6.5)-8.0	26.6	9.0	1653	44	-	440AA	D	B	69	12.1	781
235/60R16	100H	SL	6.5-(7.0)-8.5	27.1	9.4	1764	44	-	440AA	D	B	69	12.3	767

RWL: Raised White Letters



RADIO H/P



- ECONOMY
- SILENCE
- COMFORT
- WET TRACTION

3 WIDE LONGITUDINAL GROOVES

For good water evacuation, and extended shoulders provide stable cornering and more mileage.

OPTIMIZED ROAD CONTACT SHAPE

For reducing rolling resistance and prolongs mileage.

VARIABLE PITCH AND OPTIMIZED GROOVE ANGLE

For reducing tire noise.

SILICA COMPOUND

For improving gripping on wet road conditions.

M+S

PRODUCT PERFORMANCE		9.0
DRY HANDLING		
WET PERFORMANCE		
FUEL EFFICIENCY		
RIDE COMFORT		
QUIET RIDE		
TREAD LIFE		

Rim Diameter	Aspect Ratio	Speed Rating	UTQG
13-15	70s-55s	T/H/V	440/A/A

APPLICABLE MODELS

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD. RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
165/65R13	77T	SL	4.5-(5.0)-6.0	21.4	6.7	908	44	440AA	D	C	69	9.8	970
165/70R13	79T	SL	4.0-(5.0)-5.5	22.1	6.7	963	44	440AA	D	C	69	10.0	939
175/70R13	82T	SL	4.5-(5.0)-6.0	22.7	7.0	1047	44	440AA	D	C	69	10.3	916
165/55R14	72H	SL	4.5-(5.0)-6.0	21.2	6.7	783	44	440AA	D	C	69	9.8	981
175/65R14	82H	SL	(5.0)-6.0	23.0	7.0	1047	44	440AA	D	C	69	10.5	903
165/70R14	81H	SL	4.0-(5.0)-5.5	23.1	6.7	1019	44	440AA	D	C	69	10.6	897
175/70R14	84H	SL	4.5-(5.0)-6.0	23.7	7.0	1102	44	440AA	D	C	69	10.8	876
165/55R15	75V	SL	4.5-(5.0)-6.0	22.2	6.7	853	44	440AA	D	C	69	10.3	937
165/60R15	77H	SL	4.5-(5.0)-6.0	22.8	6.7	908	44	440AA	D	C	69	10.6	911
175/65R15	84H	SL	(5.0)-6.0	24.0	7.0	1102	44	440AA	D	C	69	11.0	866

SPORTS V1 H/P



ECONOMY



SILENCE



COMFORT



WET TRACTION

3 STRAIGHT GROOVES WITH SERIAL RIB

For adding more cornering power and wet traction.

OPTIMIZED PITCH ARRANGEMENT

For reducing noise.


VARIOUS LINES

Adopted for improving wet performance and giving attractive view.

TREAD COMPOUND

By considering environment, adopted special compound for giving lower rolling resistance and saving fuel consumption.

M+S

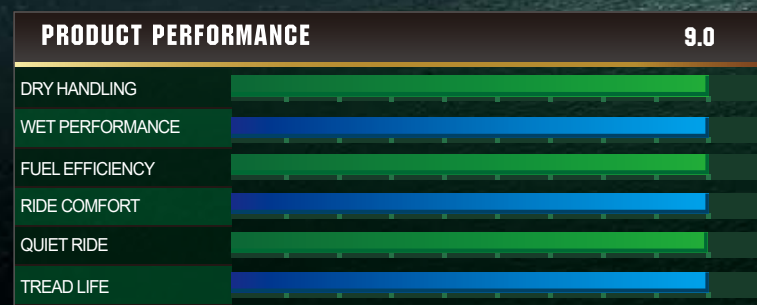

Rim Diameter	Aspect Ratio	Speed Rating
14-16	75s-40s	H/S/T/V

APPLICABLE MODELS



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD. RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
165/55R14	72V	SL	4.5-(5.0)-6.0	21.2	6.7	783	44	380AA	D	B	70	9.9	987
165/60R14	75H	SL	4.5-(5.0)-6.0	21.8	6.7	853	44	380AA	D	B	70	10.1	959
155/65R14	75T	SL	(4.5)-5.5	22.0	6.2	853	44	380AA	D	B	70	10.2	952
165/65R14	79S	SL	4.5-(5.0)-6.0	22.4	6.7	963	44	380AA	D	B	70	10.4	932
185/75R14	89H	SL	4.5-(5.0)-6.0	25.0	7.2	1279	44	380AA	D	B	70	11.4	838
165/45R15	68V	SL	5.0-(5.5)-6.0	20.8	6.5	695	44	380AA	D	B	70	9.8	1004
165/50R15	73V	SL	4.5-(5.0)-6.0	21.5	6.7	805	44	380AA	D	B	70	10.1	971
165/55R15	75V	SL	4.5-(5.0)-6.0	22.2	6.7	853	44	380AA	D	B	70	10.4	943
175/55R15	77V	SL	5.0-(5.5)-6.0	22.6	7.2	908	44	380AA	D	B	70	10.5	927
155/60R15	74H	SL	(4.5)-5.5	22.3	6.2	827	44	380AA	D	B	70	10.4	937
165/60R15	77H	SL	4.5-(5.0)-6.0	22.8	6.7	908	44	380AA	D	B	70	10.6	917
175/60R15	81H	SL	(5.0)-6.0	23.3	7.0	1019	44	380AA	D	B	70	10.8	899
165/65R15	81H	SL	4.5-(5.0)-6.0	23.4	6.7	1019	44	380AA	D	B	70	10.9	893
165/40R16	73V	XL	(6.0)	21.2	6.7	805	50	380AA	D	B	70	10.1	987
165/45R16	74V	XL	5.0-(5.5)-6.0	21.8	6.5	827	50	380AA	D	B	70	10.3	959
165/50R16	75V	SL	4.5-(5.0)-6.0	22.5	6.7	853	44	380AA	D	B	70	10.6	929

RLIN-FLAT M+S



RA4100



RA710



RA4100 RFT



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	STATIC LOADED RADIUS (IN.)	REVS PER MILE
245/50RF18	100V	Std	7.0-(7.5)-8.5	27.7	10.0	1764	44	320AA	12.9	756
255/55RF18	105V	Std	7.0-(8.0)-9.0	29.0	10.4	2039	44	320AA	13.4	721

RA710 RFT



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLEMAX LOAD (LBS)	MAX INFL. (PSI)	UTQG	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
205/55RF16	91V	Std	6.0J-7.0J	24.9	8.4	1356	44	380AA	D	C	69	11.5	840
225/45RF17	94W	XL	7.0J-8.0J	25.0	8.9	1257	50	380AA	D	C	71	11.6	832
225/50RF17	98V	XL	6.5J-7.5J	25.9	9.2	1653	51	380AA	D	C	70	12.0	807
225/55RF17	101V	XL	6.5J-7.5J	26.8	9.2	1819	51	380AA	D	C	71	12.4	781
225/40RF18	92W	XL	7.5J-8.5J	25.1	9.1	1389	50	380AA	D	C	71	11.8	828
245/40RF18	97V	XL	8.0J-9.0J	25.7	9.8	1609	50	380AA	D	C	72	12.0	808
255/40RF18	99W	XL	8.5J-9.5J	26.0	10.2	1709	50	380AA	0	-	-	12.1	798
225/45RF18	95W	XL	7.0J-8.0J	25.9	8.9	1521	50	380AA	-	-	-	12.1	801
275/35RF19	100W	XL	9.0J-10.0J	26.6	10.9	1764	50	380AA	-	-	-	12.4	782
245/40RF19	98W	XL	8.0J-9.0J	26.7	9.8	1653	50	380AA	D	C	71	12.4	777
275/40RF19	101W	Std	9.0J-10.0J	27.7	10.9	1819	44	380AA	D	C	71	12.5	751
245/45RF18	100V	XL	7.5J-8.5J	26.7	9.8	1764	50	380AA	D	C	71	12.9	779
245/45RF19	102W	XL	7.5J-8.5J	27.7	9.6	1874	50	380AA	D	C	71	12.9	751
255/50RF19	103W	Std	7.5J-8.5J	29.1	10.4	1929	44	380AA	-	-	-	13.5	719
235/55RF19	101W	Std	7.0J-8.0J	29.2	9.6	1819	44	380AA	-	-	-	13.6	717

RA350 / COMMERCIAL/VAN



3 ZIGZAG GROOVES

For excellent water evacuation to improve wet traction.

INTENSIVE SIPES

For improving wet traction and reducing noise level.

REINFORCED STRUCTURE

To minimize downtime, adopted more strong bead and belt construction.

DEEPER AND WIDER TREAD

For stable cornering and more mileage.

M+S

PRODUCT PERFORMANCE

9.08



Rim Diameter	Aspect Ratio	Speed Rating
13-16	85s-60s	Q/R/S/T/H/L



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	SIDE WALL	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
165/70R13C	88/86S	C	4.5-(5.0)	22.1	6.7	1235	1168	54	BSW	D	C	72	10.2	945
155R13C	90/88S	D	4.0-(4.5)-5.0	22.8	6.2	1323	1235	65	BSW	D	C	72	10.4	919
165R13C	94/93S	D	4.0-(4.5)-5.0	23.5	6.6	1480	1435	65	BSW	D	C	72	10.7	891
175R13C	97/95S	D	4.5-(5.0)-5.5	24.0	7.0	1610	1520	65	BSW	D	C	72	10.9	871
175/65R14C	90/88T	C	(5.0)-5.5	23.0	7.0	1323	1235	54	BSW	D	C	72	10.6	909
165/70R14C	84/80S	C	4.5-(5.0)-5.5	23.1	6.7	1102	992	51	BSW	D	C	72	10.7	903
175/70R14C	98/96S	D	4.5-(5.0)-5.5	23.7	7.0	1655	1565	65	BSW	D	C	72	10.9	882
185/70R14C	102/100S	D	5.0-(5.5)-6.0	24.3	7.4	1875	1765	65	BSW	D	C	72	11.1	862
205/75R14C	109/107R	D	(5.5)-6.5	26.1	8.0	2270	2150	69	BSW	D	C	72	11.9	800
165R14C	96/95S	D	4.0-(4.5)-5.0	24.5	6.6	1565	1521	65	BSW	D	C	72	11.2	854
185R14C	102/100Q	D	5.0-(5.5)-6.0	25.6	7.4	1875	1765	65	BSW	D	C	72	11.7	817
195R14C	106/104Q	D	5.0-(5.5)-6.0	26.2	7.8	2095	1985	65	BSW	D	C	72	11.9	797
205/65R15C	102/100T	C	5.5-(6.0)-6.5	25.5	8.2	1875	1765	54	BSW	D	C	72	11.7	821
215/65R15C	104/102T	C	6.0-(6.5)-7.0	26.0	8.7	1985	1875	54	BSW	D	C	72	11.9	804
195/70R15C	104/102R	D	5.0-(6.0)-6.5	25.8	7.9	1985	1875	69	BSW	D	C	72	11.8	811
205/75R15C	110/108R	D	(5.5)-6.5	27.1	8.0	2335	2205	69	BSW	D	C	72	12.4	771
195R15C	106/104R	D	5.0-(5.5)-6.0	27.2	7.8	2095	1985	65	BSW	D	C	72	12.4	770
215/60R16C	108/106T	D	6.0-(6.5)-7.0	26.1	8.7	2205	2095	69	BSW	D	C	72	12.0	800
195/65R16C	104/102R	D	5.5-(6.0)-6.5	26.0	7.9	1985	1875	69	BSW	D	C	72	12.0	805
205/65R16C	107/105R	D	5.5-(6.0)-6.5	27.4	8.2	2149	2039	69	BSW	D	C	72	12.2	790
215/65R16C	109/107T	D	6.0-(6.5)-7.0	28.0	8.7	2271	2149	69	BSW	D	C	72	12.6	775
225/65R16C	112/110R	D	6.0-(6.5)-7.0	28.5	9.0	2469	2337	69	BSW	D	C	72	12.8	760
235/65R16C	115/113R	D	6.5-(7.0)-7.5	28.0	9.4	2680	2535	69	BSW	D	C	72	12.8	746
175/75R16C	101/99R	D	4.5-(5.0)-5.5	26.3	7.0	1820	1710	69	BSW	D	C	72	12.1	795
185/75R16C	104/102R	D	(5.0)-6.0	26.9	7.2	1985	1875	69	BSW	D	C	72	12.4	776
195/75R16C	107/105R	D	5.0-(5.5)-6.0	28.5	7.7	2149	2039	69	BSW	D	C	72	12.9	755
205/75R16C	110/108R	D	(5.5)-6.5	29.1	8.0	2337	2205	69	BSW	D	C	72	13.1	740
215/75R16C	116/114S	E	5.5-(6.0)-7.0	28.7	8.5	2755	2600	76	BSW	D	C	72	13.1	730
225/75R16C	118/116Q	E	5.5-(6.0)-6.5	29.3	8.8	2910	2755	76	BSW	D	C	72	13.2	709
225/55R17C	109/107H	D	6.0-(7.0)-8.0	27.8	9.2	2271	2149	69	BSW	D	C	72	12.3	765
215/60R17C	109/107T	D	6.0-(6.5)-7.0	27.2	8.7	2270	2150	69	BSW	D	C	72	12.6	770
235/60R17C	117/115T	E	6.5-(7.0)-7.5	28.1	9.4	2835	2680	76	BSW	D	C	72	13.0	744
LT175/75R14	94/91S	D	4.5-(5.0)-6.0	24.3	7.0	1475	1355	65	BSW	D	C	72	11.1	859
LT195/85R15	113/111L	F	5.0-(5.5)-6.0	28.0	7.7	2535	2405	94	BSW	-	-	-	12.7	746
LT185/85R16	111/109L	F	4.5-(5.0)-6.0	28.3	7.2	2405	2270	94	BSW	D	C	72	13.0	738
LT195/85R16	114/112L	F	5.0-(5.5)-6.0	29.1	7.7	2600	2470	94	BSW	D	C	72	13.2	720
LT205/85R16	117/115L	F	5.0-(5.5)-6.5	29.7	8.0	2835	2680	94	BSW	D	C	72	13.5	704



RA550 COMMERCIAL/VAN



ECONOMY



HIGH MILEAGE



WET TRACTION



COMFORT

Zigzag rib design for excellent traction and stability.

Three wide longitudinal grooves ensure superior water evacuation.

Continuous center rib provides high mileage and even wear.

Semi-closed shoulder design improves wear resistance and reduces irregular wear.

Durable tread compound for longer service life and enhanced cut resis-

M+S

PRODUCT PERFORMANCE		9.08
DRY HANDLING		
WET PERFORMANCE		
FUEL EFFICIENCY		
RIDE COMFORT		
QUIET RIDE		
TREAD LIFE		

Rim Diameter ▾	Aspect Ratio ▾	Speed Rating ▾
15	80s	S



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	SIDE WALL	STATIC LOADED RADIUS (IN.)	REVS PER MILE
195R15C	106/104S	D	5.0-(5.5)-6.0	27.2	7.8	2095	1985	65	BSW	12.4	770

BSW: Black Sidewall



RA555 / COMMERCIAL/VAN



ECONOMY



HIGH MILEAGE



WET TRACTION



COMFORT

Dual Center Rib Design

Dual continuous ribs enhance straight-line stability and provide precise handling with uniform tread wear.

Zigzag Groove Pattern

Zigzag grooves and lateral sipes improve traction and braking performance on various road surfaces.

Reinforced Shoulder Structure

Strengthened shoulder design distributes ground pressure evenly to resist irregular wear and improve mileage.


Durable Compound & Semi-Steel Construction

Special tread compound combined with semi-steel carcass ensures superior load capacity, wear resistance, and extended service life.

Excellent Water Evacuation

Deep and wide longitudinal grooves ensure efficient water drainage, improving wet grip and safety.

M+S

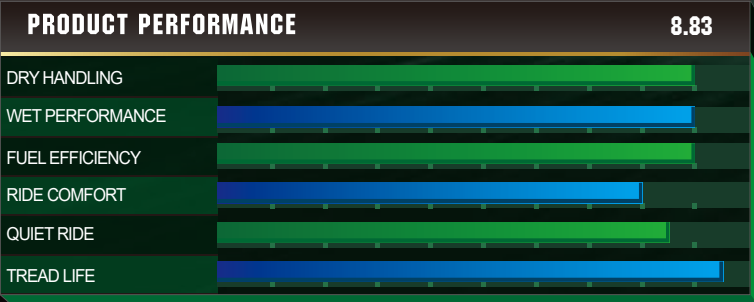

Rim Diameter	Aspect Ratio	Speed Rating
16	-	N



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	SIDE WALL
7.00R16C	115/111N	F	5.0-(5.5)-6.0	30.6	8.0	2680	2405	95	BSW

BSW: Black Sidewall



VANCRLIX RV-45

ALL WEATHER COMMERCIAL/VAN



BRAKING

WINTER

WET TRACTION

HIGH MILEAGE

SILICA

M+S

Four longitudinal straight main grooves

Provide stable driving support, quickly drain water and slush, significantly improve hydroplaning resistance and wet handling stability.

New durable tread compound with optimized contour design

Enhances tread contact stability and wear resistance, balancing durability with grip performance.

High-density zigzag 3D sipes on tread blocks

Effectively increase contact area and flexibility, offering stronger grip on icy and slippery surfaces.

Open shoulder design


Delivers strong water evacuation and anti-hydroplaning performance, enhancing safety on wet and snowy roads.

M+S and Three-Peak Mountain Snowflake (3PMSF) symbols

Ensure excellent snow performance.

Stepped or serrated groove walls

Improve snow self-cleaning ability and enhance traction on deep snow roads.

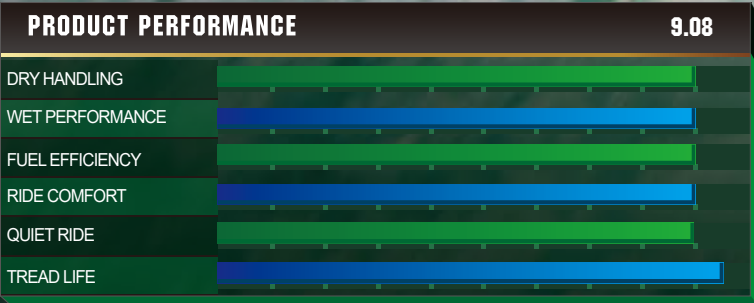

Rim Diameter	Aspect Ratio	Speed Rating
14-16	75s-65s	R/S/T

APPLICABLE MODELS

TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
215/75R14C	112/110R	D	5.5-(6.0)-7.0	26.7	8.5	2470	2335	69	C	C	71	12.1	783
185R14C	102/100R	D	5.0-(5.5)-6.0	25.7	7.4	1875	1765	65	C	C	71	11.7	815
195/70R15C	104/102S	D	5.0-(6.0)-6.5	25.8	7.9	1985	1875	65	C	C	71	11.8	811
215/70R15C	109/107S	D	5.5-(6.5)-7.0	26.9	8.7	2270	2150	65	C	C	71	12.2	778
225/70R15C	112/110S	D	6.0-(6.5)-7.0	27.4	9.0	2470	2335	65	C	C	71	12.5	762
195/65R16C	104/102T	D	5.5-(6.0)-6.5	26.0	7.9	1985	1875	69	C	C	71	12.0	805
205/65R16C	107/105T	D	5.5-(6.0)-6.5	26.5	8.2	2150	2040	69	C	C	71	12.2	790
215/65R16C	109/107T	D	6.0-(6.5)-7.0	27.0	8.7	2270	2150	69	C	C	71	12.4	774
235/65R16C	115/113S	D	6.5-(7.0)-7.5	28.0	9.4	2680	2535	69	C	C	71	12.8	746
185/75R16C	104/102S	D	(5.0)-6.0	26.9	7.2	1985	1875	69	C	C	71	12.4	776
195/75R16C	107/105S	D	5.0-(5.5)-6.0	27.5	7.7	2150	2040	69	C	C	71	12.6	761

ICE-FIGHTER I WINTER HP

WINTER

SILENCE

COMFORT

WET TRACTION

SILICA

M+S

SPECIAL Y-STYLE DIRECTIONAL PATTERN DESIGN

Improve the handling stability in ice-snow road conditions.

HIGH DENSITY 3DSIPES ON THE TREAD PATTERN


Ensure the general rigidity of the tread,improve the adhesive power between wheel and the ice-snow ground,and strengthen the holding ability.

OPEN GROOVES

For effective water evacuation,greatly reduce the hydroplaning,and ensure the safety on ice-snow road.

ADVANCED SILICA COMPOUND

Enhances the traction and balance in winter driving conditions.

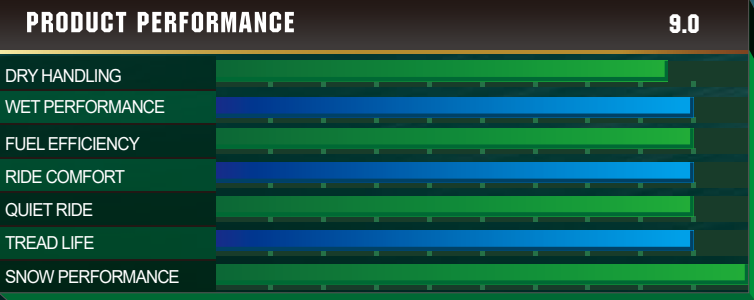

Rim Diameter

Aspect Ratio

Speed Rating

13-17

70s-50s

T/H

APPLICABLE MODELS

TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
165/70R13	79T	SL	4.0-(5.0)-5.5	22.1	6.7	963	44	E	C	71	10.2	945
185/60R14	82T	SL	5.0-(5.5)-6.5	22.8	7.4	1047	44	E	C	71	10.7	919
175/65R14	82T	SL	(5.0)-6.0	23.0	7.0	1047	44	E	C	71	10.6	909
185/65R14	86T	SL	5.0-(5.5)-6.5	23.5	7.4	1168	44	E	C	71	10.9	891
165/70R14	81T	SL	4.0-(5.0)-5.5	23.1	6.7	1019	44	E	C	71	10.5	903
175/70R14	88T	XL	4.5-(5.0)-6.0	23.7	7.0	1235	50	E	C	71	10.8	882
185/70R14	88T	SL	4.5-(5.5)-6.0	24.3	7.4	1235	44	E	C	71	11.1	862
195/50R15	82H	SL	5.5-(6.0)-7.0	22.7	7.9	1047	44	E	C	72	11.1	921
195/55R15	85H	SL	5.5-(6.0)-7.0	23.4	7.9	1135	44	E	C	72	11.0	893
185/60R15	88H	XL	5.0-(5.5)-6.5	23.7	7.4	1235	50	E	C	71	11.3	881
195/60R15	88H	SL	5.5-(6.0)-7.0	24.2	7.9	1235	44	E	C	72	10.6	864
175/65R15	84T	SL	(5.0)-6.0	24.0	7.0	1102	44	E	C	71	10.9	872
185/65R15	88T	SL	5.0-(5.5)-6.5	24.4	7.4	1235	44	E	C	71	11.2	855
195/65R15	91T	SL	5.5-(6.0)-7.0	25.0	7.9	1356	44	E	C	72	11.5	836
205/65R15	94T	SL	5.5-(6.0)-7.5	25.5	8.2	1477	44	E	C	72	11.7	821
195/55R16	91H	XL	5.5-(6.0)-7.0	24.4	7.9	1356	50	E	C	72	11.4	857
205/55R16	91T	SL	5.5-(6.5)-7.5	24.9	8.4	1356	44	E	C	72	11.5	840
215/55R16	97H	XL	6.0-(7.0)-7.5	25.3	8.9	1609	50	E	C	72	11.9	827
225/55R16	99H	XL	6.0-(7.0)-8.0	25.7	9.2	1709	50	E	C	72	11.7	812
205/60R16	96H	XL	5.5-(6.0)-7.5	25.7	8.2	1565	50	E	C	72	12.0	815
215/60R16	99H	XL	6.0-(6.5)-7.5	26.1	8.7	1709	50	E	C	72	11.9	800
205/50R17	93H	XL	5.5-(6.5)-7.5	25.1	8.4	1433	50	E	C	72	11.7	832
225/50R17	98H	XL	6.0-(7.0)-8.0	25.9	9.2	1653	50	E	C	72	12.2	807
215/55R17	98H	XL	6.0-(7.0)-7.5	26.3	8.9	1653	50	E	C	72	12.0	795
225/55R17	101H	XL	6.0-(7.0)-8.0	26.8	9.2	1819	50	E	C	72	12.4	781

ICE-FIGHTER II

WINTER SUV/UHP


HANDLING


WINTER


WET TRACTION


BRAKING


SILICA

M+S



Y-STYLE DIRECT-
IONAL PATTERN
DESIGN

Improve the handling
stabilit in ice-snow
road conditions.

HIGH DENSITY
3D SIPES


Strengthen the pattern
rigidity, and provide
excellent grip performance
on the ice land.

WELL-DESIGNED
FOOTPRINT

For excellent hanling
ability in both ice-snow
and dry-wet road
conditions.

ADVANCED SILICA
COMPOUND

Enhances the traction
and balance in winter
driving congitions.

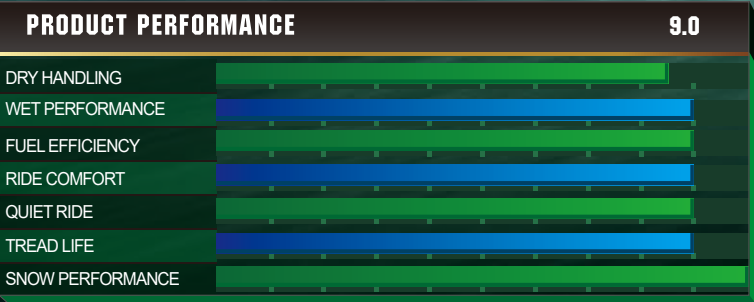

Rim Diameter	Aspect Ratio	Speed Rating
16-19	70s-40s	T/H/V

APPLICABLE MODELS



TIRE SIZE	SERVIEC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
215/65R16	98H	SL	6.0-(6.5)-7.5	27.0	8.7	1653	44	B	D	72	12.4	774
215/70R16	100T	SL	5.5-(6.5)-7.0	27.9	8.7	1764	44	B	D	72	12.8	750
245/70R16	111T	XL	6.5-(7.0)-8.0	29.5	9.8	2403	50	B	D	72	13.4	708
225/45R17	94H	XL	7.0-(7.5)-8.5	25.0	8.9	1477	50	B	D	72	12.6	838
215/60R17	96H	SL	6.0-(6.5)-7.5	27.2	8.7	1565	44	B	D	72	11.7	770
225/60R17	99H	SL	6.0-(6.5)-8.0	27.9	9.0	1709	44	B	D	72	12.8	750
235/60R17	102H	SL	6.5-(7.0)-8.5	28.1	9.4	1874	44	B	D	72	13.1	744
225/65R17	106H	XL	6.0-(6.5)-8.0	28.5	9.0	2094	50	B	D	72	13.0	734
235/65R17	108H	XL	6.5-(7.0)-8.5	29.1	9.4	2205	50	B	D	72	13.3	720
265/65R17	112T	SL	7.5-(8.0)-9.5	30.6	10.7	2469	44	B	D	73	13.9	684
225/40R18	92V	XL	7.5-(8.0)-9.0	25.1	9.1	1389	50	B	D	72	11.9	834
245/45R18	100V	XL	7.5-(8.0)-9.0	26.7	9.6	1764	50	B	D	72	13.4	785
255/55R18	109H	XL	7.0-(8.0)-9.0	29.0	10.4	2271	50	B	D	73	12.5	721
235/60R18	107H	XL	6.5-(7.0)-8.5	29.1	9.4	2149	50	B	D	72	13.4	719
255/50R19	107V	XL	7.0-(8.0)-9.0	29.1	10.4	2149	50	B	D	72	13.5	719

RW777 WINTER SUV/UHP



ASYMMETRIC TREAD DEIGN

Provides balanced performance for different driving conditions.

ADVANCED SILICA COMPOUND

Keeps rubber flexible for maximum performance in extreme cold temperatures in winter.

HIGH DENSITY 3D SIPES

Ensure the general rigidity of the tread,improve the adhesive power between wheel and the ice-snow ground,and strengthen the holding ability.

WELL-DESIGNED FOOTPRINT

For excellent handling ability in both ice-snow and dry-wet road conditions.

PRODUCT PERFORMANCE

9.0



Rim Diameter	Aspect Ratio	Speed Rating
15-22	75s-35s	T/H/V



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	MAX INFL. (PSI)	FE	WG	ERNC (dB)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
215/75R15	100T	SL	5.5-(6.0)-7.0	27.7	8.5	1764	44	D	E	71	12.6	756
235/70R16	106T	SL	6.0-(7.0)-8.0	29.0	10.6	2094	44	D	E	71	13.2	722
235/45R17	97V	XL	7.5-(8.0)-9.0	25.4	9.3	1609	50	D	E	71	11.9	825
215/50R17	91H	SL	6.0-(7.0)-7.5	25.5	8.9	1356	44	D	E	71	11.9	820
235/55R17	103H	XL	6.5-(7.5)-8.5	27.2	9.6	1929	50	D	E	71	12.6	770
285/70R17	117T	SL	7.5-(8.5)-9.5	32.8	11.5	2833	44	D	E	74	14.3	638
245/75R17	112T	SL	6.5-(7.0)-8.0	31.5	9.8	2469	44	D	E	71	14.8	664
255/40R18	99V	XL	8.5-(9.0)-10.0	26.0	10.2	1709	50	D	E	72	12.7	804
225/45R18	95H	XL	7.0-(7.5)-8.5	25.9	8.9	1521	50	D	E	71	12.2	806
255/45R18	103V	XL	8.0-(8.5)-9.5	27.0	10.0	1929	50	D	E	72	12.7	773
275/45R18	107V	XL	8.5-(9.0)-10.5	27.8	10.7	2149	50	D	E	72	13.1	753
235/50R18	101V	XL	6.5-(7.5)-8.5	27.3	9.6	1819	50	D	E	71	13.8	766
245/50R18	104V	XL	7.0-(7.5)-8.5	27.7	10.0	1984	50	D	E	71	12.9	756
215/55R18	99H	XL	6.0-(7.0)-7.5	27.3	8.9	1709	50	D	E	71	12.2	766
235/55R18	104H	XL	6.5-(7.5)-8.5	28.1	9.6	1984	50	D	E	71	12.6	743
265/60R18	110T	SL	7.5-(8.0)-9.5	30.5	10.7	2337	44	D	E	72	14.0	685
285/60R18	116T	SL	(8.5)-10.0	31.5	11.8	2756	44	D	E	74	12.9	665
235/65R18	106T	SL	6.5-(7.0)-8.5	30.0	9.4	2094	44	D	E	71	14.4	696
275/40R19	105V	XL	9.0-(9.5)-11.0	27.7	10.9	2039	50	D	E	72	12.7	756
225/45R19	96H	XL	7.0-(7.5)-8.5	27.0	8.9	1565	50	D	E	71	13.2	775
245/45R19	102V	XL	7.5-(8.0)-9.0	27.7	9.6	1874	50	D	E	71	13.0	756
255/45R19	104V	XL	8.0-(8.5)-9.5	28.1	10.0	1984	50	D	E	72	13.8	745
235/50R19	103V	XL	6.5-(7.5)-8.5	28.3	9.6	1929	50	D	E	71	13.1	739
245/55R19	107H	XL	7.0-(7.5)-8.5	29.6	10.0	2149	50	D	E	71	13.0	705
275/55R19	111H	SL	7.5-(8.5)-9.5	30.9	11.2	2403	44	D	E	72	14.3	677
275/35R20	102V	XL	9.0-(9.5)-11.0	27.6	10.9	1874	50	D	E	72	13.1	759
315/35R20	110V	XL	10.5-(11.0)-12.5	28.7	12.6	2337	50	D	E	74	13.5	730
245/40R20	99V	XL	8.0-(8.5)-9.5	27.7	9.8	1709	50	D	E	71	13.9	754
275/40R20	106V	XL	9.0-(9.5)-11.0	28.7	10.9	2094	50	D	E	72	13.0	730
245/45R20	103V	XL	7.5-(8.0)-9.0	28.7	9.6	1929	50	D	E	71	13.5	730
275/45R20	110V	XL	8.5-(9.0)-10.5	29.6	10.7	2337	50	D	E	72	13.9	705
245/50R20	105V	XL	7.0-(7.5)-8.5	29.7	10.0	2039	50	D	E	71	14.5	704
285/50R20	116V	XL	8.5-(9.0)-9.5	31.3	11.7	2756	50	D	E	74	13.5	669
275/45R21	110V	XL	8.5-(9.0)-10.5	30.7	10.7	2337	50	D	E	72	14.4	680
275/50R21	113V	XL	7.5-(8.5)-9.5	31.9	11.2	2535	50	D	E	72	14.8	657
275/40R22	107V	XL	9.0-(9.5)-11.0	30.7	10.9	2149	50	D	E	72	14.5	682

ICE-POWERGRIP / WINTER STUDDABLE



SPECIAL Y-STYLE DIRECTIONAL PATTERN DESIGN

Improve the handling stability in ice-snow road conditions.

HIGH DENSITY 3D SIPES

Strengthen the pattern rigidity, and provide excellent grip performance on the ice land.

MULTI-ROW STUDDABLE DESIGN IN SHOULDER BLOCKS

Provides general tread rigidity and excellent steering stability on ice-snow road.

VARIABLE PITCH

Enhances the traction and balance in winter driving conditions.

PRODUCT PERFORMANCE

9.0



Rim Diameter	Aspect Ratio	Speed Rating
15-16	75s-65s	R/T

APPLICABLE MODELS



TIRE SIZE	SERVIC DESC.	LOAD RANGE	APPD.RIM WIDTH (IN.)	OVERALL DIAMETER (IN.)	OVERALL WIDTH (IN.)	SINGLE MAX LOAD (LBS)	DUAL MAX LOAD (LBS)	MAX INFL. (PSI)	STATIC LOADED RADIUS (IN.)	REVS PER MILE
195/65R15	91T	SL	5.5-(6.0)-7.0	25.0	7.9	1356	-	44	11.5	836
185/75R16C	104/102R	D	(5.0)-6.0	26.9	7.2	1985	1875	69	12.4	776

SPECIFICATION TAG& MARKING METHOD

TAG detail



Tire BrandROADCRUZA

Two bands successively passed all kinds of system certification

Specification225/50R17 94W

225 / 50 R 17 94 W

SeriesRA710

225 Section Width	W means maximum speed 270km/h.	94 Load Index
50 Aspect Ratio		W Speed Symbol
		17 RIM (inch)

Speed

Speed symbol indicates the maximum travel speed
That the tire can achieve under stated condition.

SS	Maximum Speed (km/h)	SS	Maximum Speed (km/h)
P	150	H	210
Q	160	V	240
S	180	W	270
T	190	Y	300
		* ZR	over 240km/h

- * ZR means a certain range of speed
- Maximum speed refers to the speed that the tire can achieve on flat road after normal installation.

Loading Index

Load index refers to numeral value of tire’ s maximum load ability under stated condition.

LI	LOADING CAPACITY	LI	LOADING CAPACITY	LI	LOADING CAPACITY	LI	LOADING CAPACITY
60	250	76	400	91	615	106	950
61	257	77	412	92	630	107	975
62	265	78	425	93	650	108	1000
63	272	79	437	94	670	109	1030
64	280	80	450	95	690	110	1060
65	290	81	462	96	710	111	1090
66	300	82	475	97	730	112	1120
67	307	83	487	98	750	113	1150
68	315	84	500	99	775	114	1180
69	325	85	513	100	800	115	1215
70	335	86	530	101	825	116	1250
71	345	87	545	102	850	117	1285
72	355	88	560	103	875	118	1320
73	365	89	580	104	900	119	1360
74	375	90	600	105	925	120	1400
75	387						

SAFE&ECO DRIVING

SAFETY DRIVING

Please obey the traffic laws and regulations, keep cautious and respect the other drivers and pedestrians.

ECO DRIVING

The idea of “Green and Environment” is always recommended,and the advice below will save maintenance costs, extend service life of tire and save fuel.

TIRE USAGE

Tire Maintenance

For the sake of safety , you should check the tire regularly at least once a month. Be cautious about the damage and uneven wear, tire pressure abnormity, positioning, balance or suspension failure will affect overall tire performance and cause danger. Tire is the only contact surface between vehicles and ground, and it should be in a good condition.

- Check the tire pressure regularly, especially before long time driving. If tire is incorrectly inflated, it will lead to increase of rolling resistance and extra fuel consumption.

Faster driving speed will result in greater air resistance so as to increase fuel consumption.
- Keep smooth driving will avoid abrupt acceleration and sudden braking.

Convert to higher gear as soon as possible to prevent the engine running fast at lower gear.
- Use air conditioner properly. If you don’ t need it, turn off all electrical equipment, for example the electrically heated rear window.

Get ready for starting the engine. Switch off the engine if you predict the car will park longer than a few minutes.
- Check the wheel positioning and wheel camber angle by professional tire maintenance personnel regularly, and make sure that the car running smoothly and stably, which is a important factor for fuel saving.

Tire Rotation

Tire rotation is a simple and effective way to prolong tire service life through balancing degree of wear.

